READY MADE BUILDINGS

SEARS, ROEBUCK AND CO.

CHICAGO

AVERY LIBRARY
COLUMBIA UNIVERSITY

This roofing, red or green in color, furnished for Ready Made Buildings at prices shown for each building.

Fire Chief Shingle Roll Roofing

Makes Fire Resisting Roofs

Approved by Underwriters

This beautiful roofing, red or sea green in color, is included in the prices quoted for most of the Ready Made Buildings shown in this book. It is our highest priced roofing and imparts a distinctive appearance to any house or garage.

LOOKS LIKE PAINTED RED OR GREEN WOOD SHINGLES, but costs less than half as much. Wears practically twice as long and does not catch fire from flying sparks. Fire-Chief Shingle Roll Roofing does not have the defects, such as curled or warped shingles, so often found in wood shingle roofs.

THE PATTERN is made of real red or sea green crushed slate (your choice of color), with black shaded lines inlaid between each shingle, a treatment that is permanent and beautiful. Needs no painting.

EITHER COLOR will make a nice appearing roof. The rich red color of the crushed slate contrasts perfectly with the summer foliage.

RESISTS FIRE. Fire-Chief Shingle Roll Roofing actually resists fire, whereas wood shingles when dry will catch fire easily from sparks.

EXCLUDES SNOW AND WATER BETTER THAN WOOD SHINGLES. Fire-Chief Shingle Roll Roofing is airtight and watertight.

WARMER THAN WOOD SHINGLES and helps make a house cooler in Summer and warmer in Winter. Can be used over old shingles, giving double roof protection.

GUARANTEED FOR SEVENTEEN YEARS. A written guarantee, backed by the entire resources of Sears, Roebuck and Co., protects you for seventeen years. If the building is kept in good condition this roofing will wear many years longer.

IT PAYS TO BUY GOOD ROOFING because the roof of a building has to stand the hardest weather conditions.

WEARING QUALITY FULLY TESTED. The formula and process for making Fire-Chief Shingle Roll Roofing have been in use for years. It has been put to the most severe tests. Roofing laid fourteen years ago is practically as good as the day it was laid. It is an asphalt roofing that defies heat, cold, rain and snow.

We have made this THE HEAVIEST, THICKEST, STRONGEST AND MOST BEAUTIFUL of all our roofings. Each roll weighs 90 pounds. **IT IS WHAT IS KNOWN TO THE TRADE AS 4-PLY STOCK.**

THIS SHINGLE ROOFING IS FURNISHED IN ROLLS containing 108 square feet, 36 inches wide, with 8 square feet extra allowed for 2-inch laps, and will cover 100 square feet. All in one piece.

CEMENT AND GALVANIZED RUSTPROOF 1-INCH NAILS INCLUDED. For 1¾-inch nails to lay this roofing over wood shingles, add 10 cents per roll extra.

48C3320 Red
48C3321 Sea Green

$4.45 PER ROLL
108 Sq. Feet.
Shipped from CHICAGO, ILL., or CINCINNATI, OHIO.

Shipped from ALBANY, N. Y., ST. PAUL, MINN., KANSAS CITY, MO., ATLANTA, GA., at $4.75 per roll.

Since the above was printed we have extended our time guarantee on this roofing to seventeen years.

THIS BINDING GUARANTEE PROTECTS YOU FULLY IN ORDERING A READY MADE BUILDING.

BOND OF INDEMNITY.

WE GUARANTEE that every building illustrated in this book will be exactly as represented.

WE GUARANTEE the lumber used in Simplex Ready Made Buildings is a selected grade such as is used only in the better class of houses. The woods generally used are Southern yellow pine and Washington fir. Both woods have a world wide reputation for their lasting qualities.

WE GUARANTEE every Simplex Building to be practically and rigidly constructed and to give entire satisfaction for the purpose for which it is intended.

WE GUARANTEE that after shipment has been examined, if the material does not come up to the purchaser's expectations in every respect, by notifying us in writing it can be shipped back AT OUR EXPENSE and we will promptly RETURN THE ENTIRE PURCHASE PRICE and freight charges that may have been paid by the purchaser.

WE GUARANTEE to replace any item that may be damaged in transit or otherwise considered unsatisfactory, or to return the price of such items, as the purchaser may direct, upon receipt of the paid freight expense bill with a notation by the freight agent showing the damage incurred.

WE GUARANTEE to furnish free with every order plain, simple working plans, and that every Simplex building will assemble perfectly.

Sears Roebuck and Co.
Chicago, Ill.

NOTE—Prices are subject to market changes, but we will always give our customers the benefit of the lowest quotations at the time order is received.

— OVER —

AVERY LIBRARY
COLUMBIA UNIVERSITY

Ready Made Ho

The modern facilities illustrated on the following page enabled us to turn out promptly several emergency buildings, such as those shown below. Here is the best proof that we can offer of the practicability, sturdiness and attractiveness of our Simplex Ready Made Buildings. They have also been used for churches and schools, while at the same time their popularity as regular dwellings to be used all the year round is ever on the increase.

Elsewhere in this catalog we reproduce several of the hundreds of letters which we receive from satisfied customers. You may write to any of these people if you so desire, enclosing a self addressed stamped envelope for

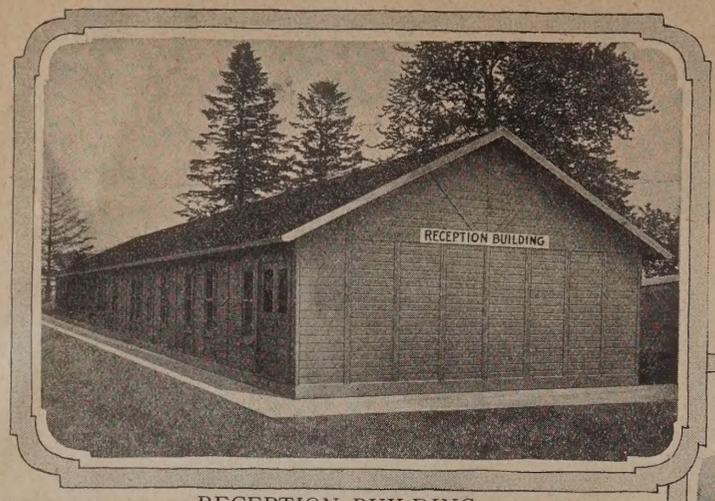

RECEPTION BUILDING

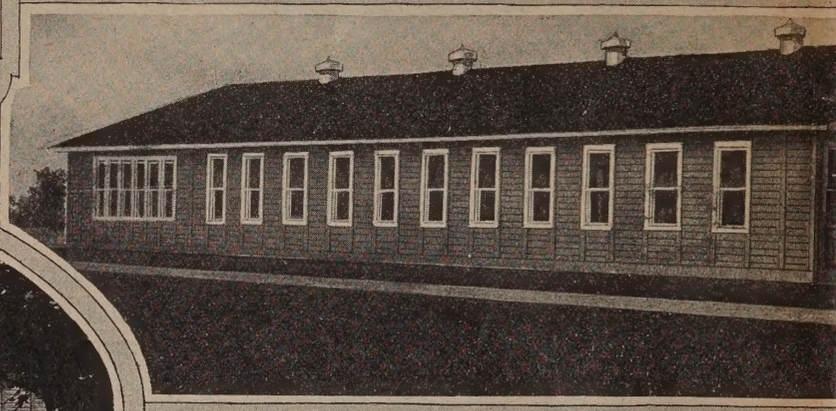

WARD

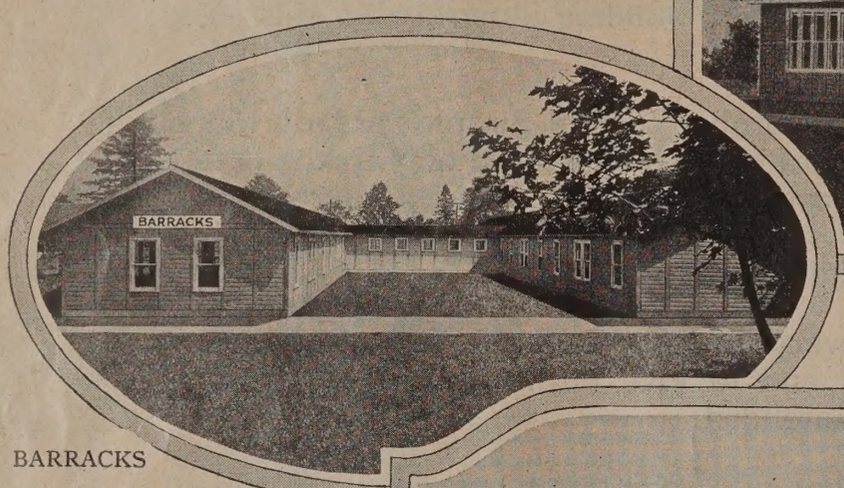

BARRACKS

This row and also bottom row of pictures show the construction of the Hospital Buildings from the setting of the sills to the finished job.

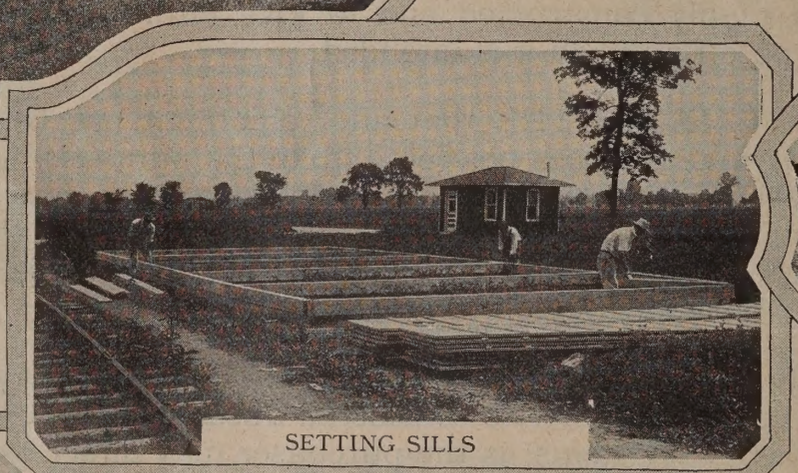

SETTING SILLS

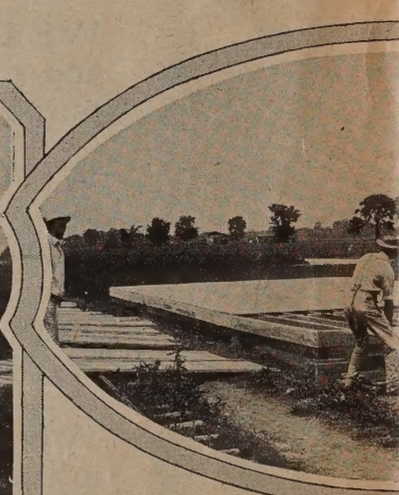

LAYING FLO

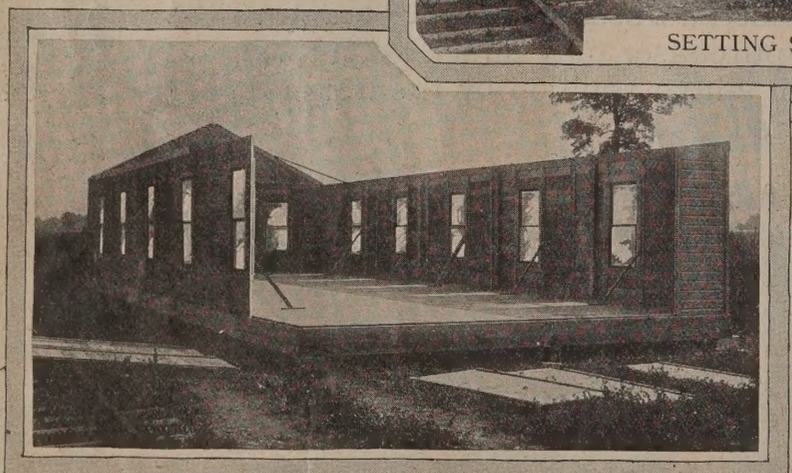

SIDE WALLS TWO-THIRDS FINISHED

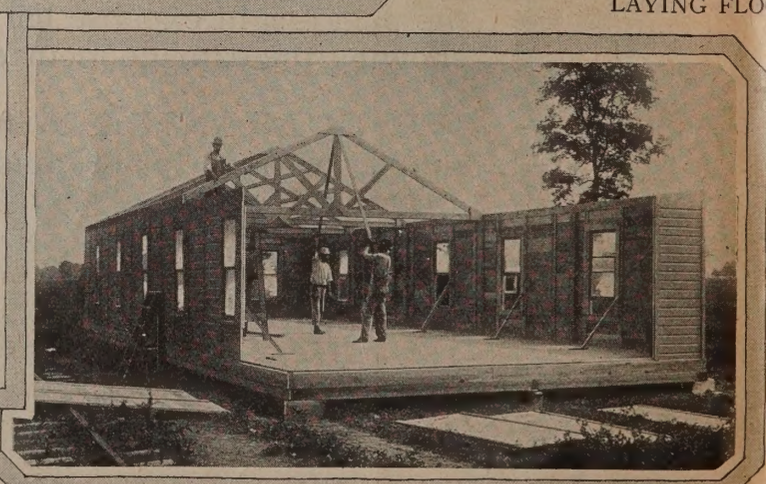

RAISING ROOF TRUSSES

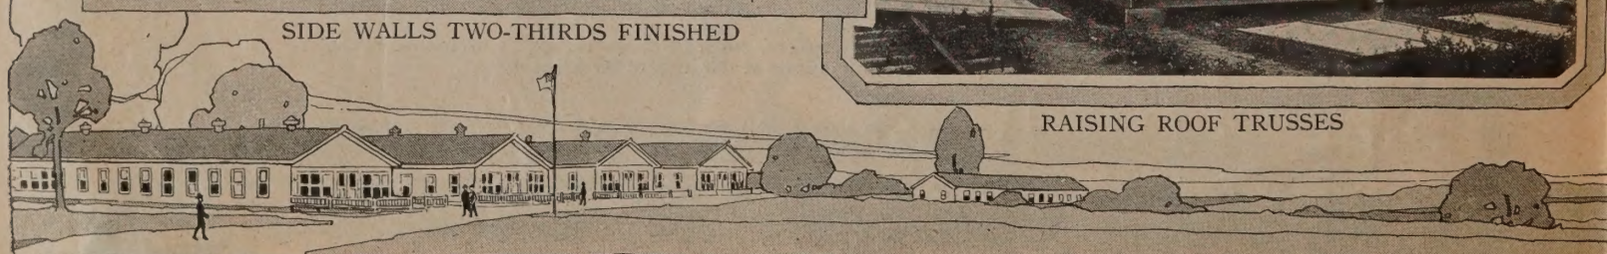

spital Buildings

reply. We feel quite sure that they will be only too glad to tell you how pleased they were with the service we gave them and the saving we enabled them to make.

Remember that our guarantee of satisfaction protects you fully in the purchase of any Ready Made Building illustrated in this catalog. We undertake to give you the fullest value for your money—high quality of material and safe delivery of all sections to your station. It is with this understanding that we solicit your order.

SEARS, ROEBUCK AND CO.

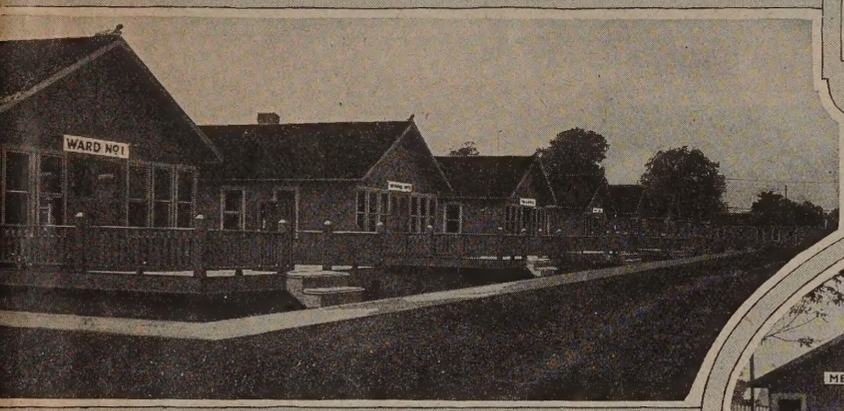

ILDINGS

INTERIOR OF WARD

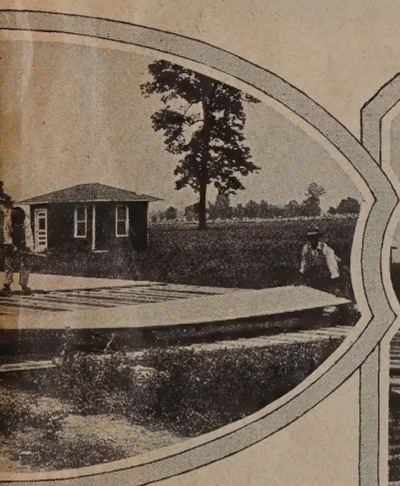

R SECTIONS

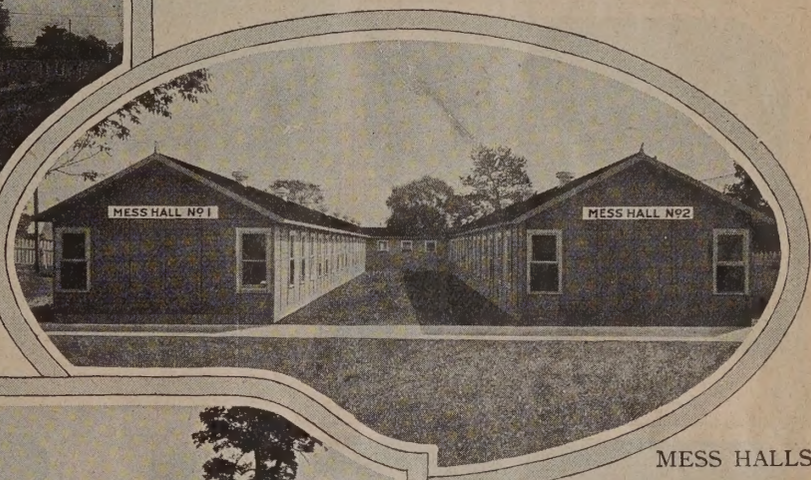

MESS HALLS

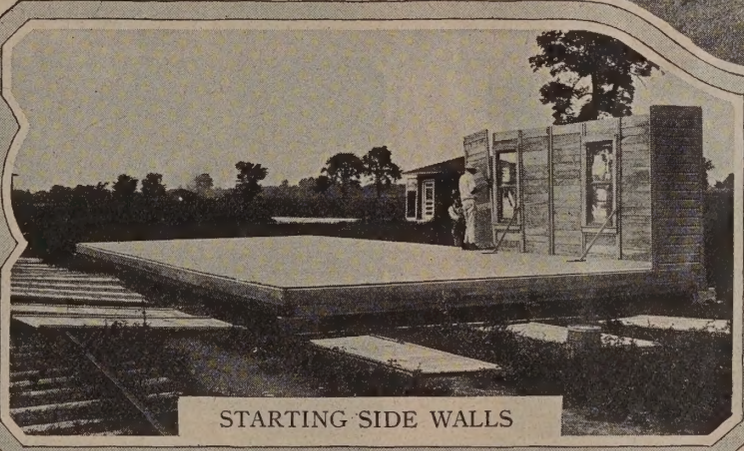

STARTING SIDE WALLS

See pages 26 and 27 showing actual time in which our Simplex Ready Made Buildings have been erected.

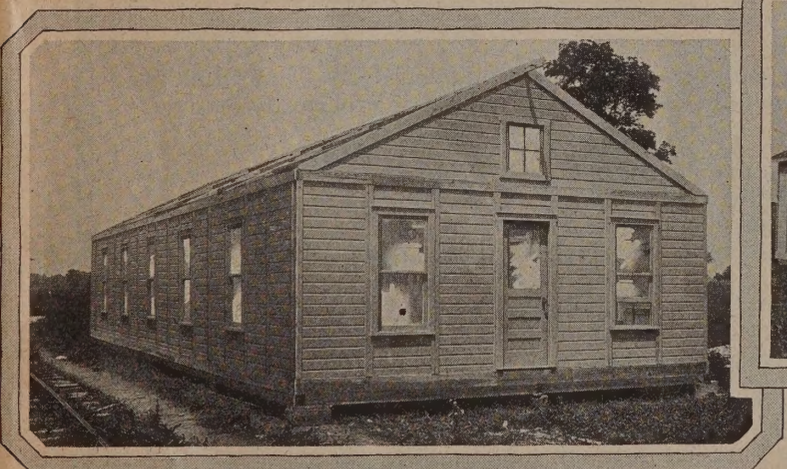

READY FOR ROOF SECTIONS

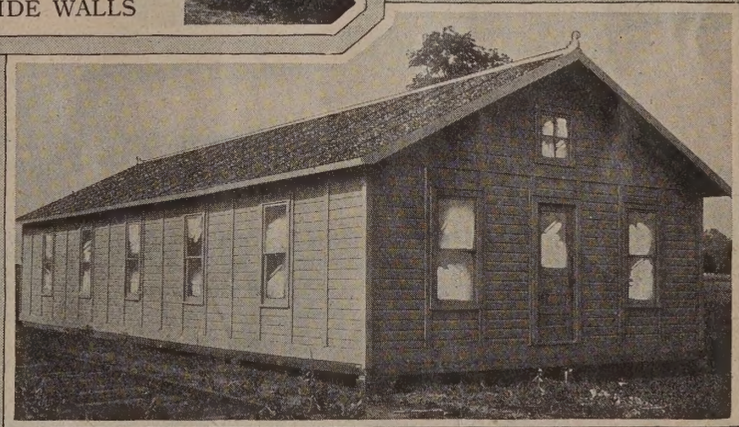

FINISHED

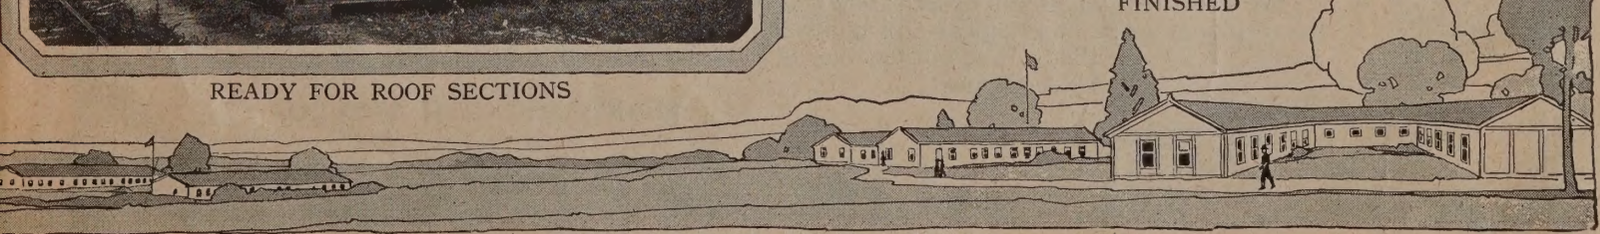

Ready Made Building Facilities

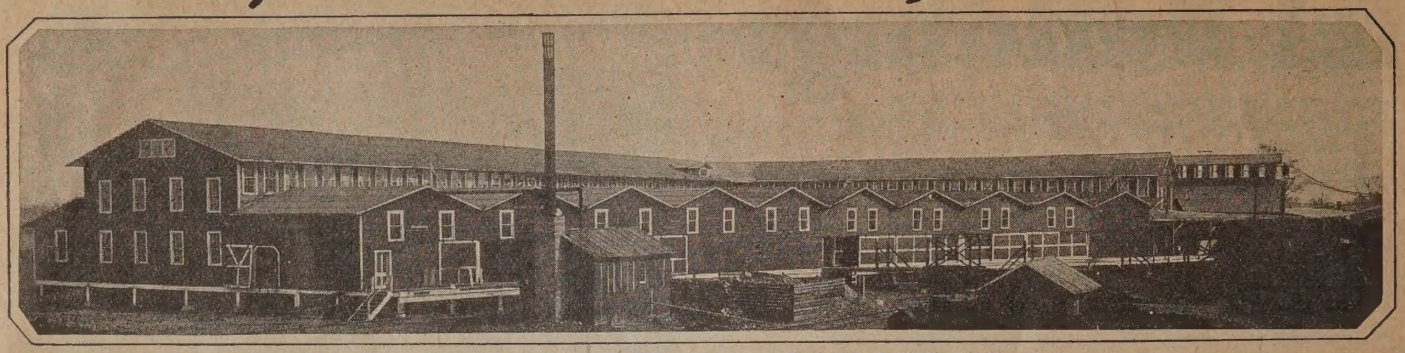

PARTIAL VIEW OF OUR READY MADE BUILDING FACTORY

ALREADY CUT LUMBER FOR YOUR BUILDING

ASSEMBLING SECTIONS

MAKING SECTIONS

POULTRY HOUSE DEPARTMENT

SUPPLY WAREHOUSE

We would like you to know that when you send us an order for a Simplex Ready Made Building of any kind, we are prepared to handle it promptly and to furnish the building perfectly manufactured of high grade material.

Our object in showing you these pictures is to convince you that we are prepared in every way to take care of your interests. In our new Ready Made Building Factory, equipped with the latest machinery, we have skilled workmen who thoroughly understand the construction of Simplex Ready Made Buildings. From the time the material is cut and fitted for the uniform sections until the completed building is ready to leave the factory, the closest inspection is regularly and systematically taking place. We make sure that every section fits perfectly, and we carry in stock quite a number of all sections required in the building of all our Ready Made Houses and Garages, to enable us to assemble the complete order and make shipment without unnecessary delay.

We know that when you order a Simplex Ready Made Building from this book you are getting the results of years of practical and painstaking experience and that we can give you a building that can be put together in the least time, with the least trouble and at the least expense.

SEARS, ROEBUCK AND CO.

Simplex Ready Made Buildings

Easy to Erect

This is our new catalog of Simplex Ready Made Buildings, illustrating our complete line of bungalows, garages, churches, schoolhouses, gun club houses, etc. These buildings are shipped in sections and can easily and quickly be put together by the ordinary handy man. The only tools necessary are a screwdriver, hammer and wrench.

Careful Construction

Simplex Ready Made Buildings are made in our own electrically driven factory, especially designed, equipped and manned for this particular kind of work. Our Ready Made Buildings are constructed by experts in this system. They devote their entire time to this work and you are, therefore, assured of neat, accurate and durable craftsmanship.

Quality Material

The material used in our Simplex Ready Made Buildings is carefully selected for strength, wear and adaptability to paint. In fact, the material from which we make our Ready Made Buildings is good enough for any kind of dwelling.

Uniform Sections

The sections are 3 feet in width and 8 feet high. They are interchangeable and a convenient size to handle, which makes it very easy to erect a Simplex Ready Made Building. No sections are too large for two men to handle. WE FURNISH CLEAR, EASILY UNDERSTOOD INSTRUCTIONS AND WORKING PLANS.

Proof

Turn to pages 26 to 28, in this catalog and see for yourself how two men can erect a three-room house in 8 hours and a garage in 5 hours and 45 minutes. This is no guesswork. The statements made on the pages referred to are backed up by an affidavit regularly sworn to.

Prompt Shipments

We make prompt shipment of all designs shown in this catalog. Each design is inspected before being shipped, to make sure that all parts fit perfectly and that there will be no mistake or confusion when the building gets to destination. Sections are securely crated with steel strapping and we guarantee safe delivery.

Easy Payments

You can buy a Simplex Ready Made House, Garage or other building for cash or easy payments. Read the last two pages of this catalog carefully and see how easily and how quickly you can be the possessor of a Simplex Ready Made Building.

Prices

The prices quoted in the body of this book are F. O. B., our factories, and are subject to market changes, but we will always give our customers the benefit of the lowest quotations at the time the order is received.

Here's How Simplex Buildings Come

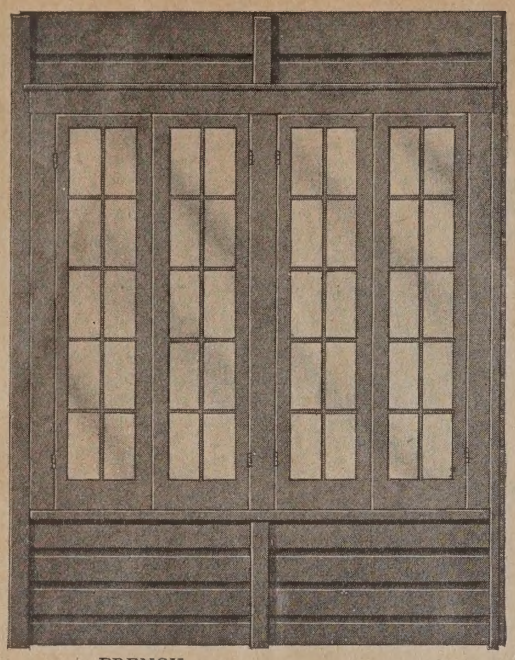

FRENCH MULLION WINDOW SECTION

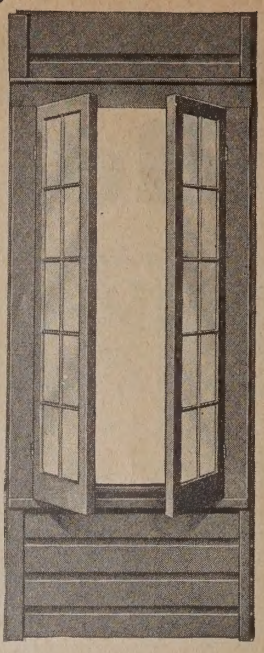

FRENCH WINDOW SECTION

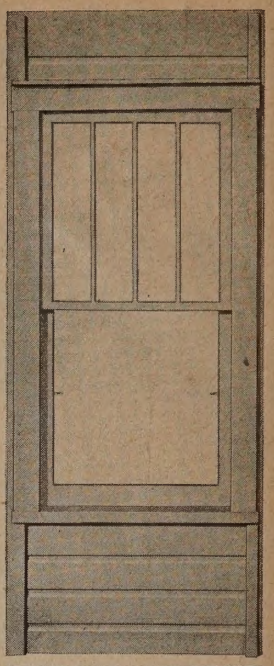

COLONIAL WINDOW SECTION

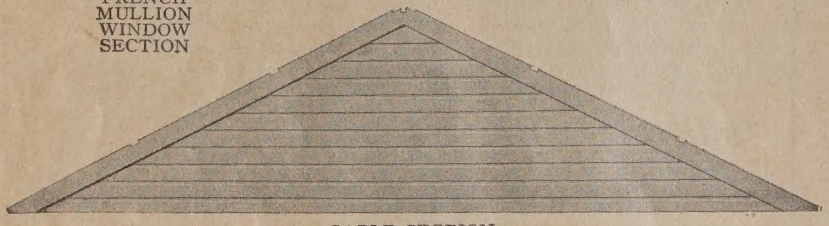

GABLE SECTION

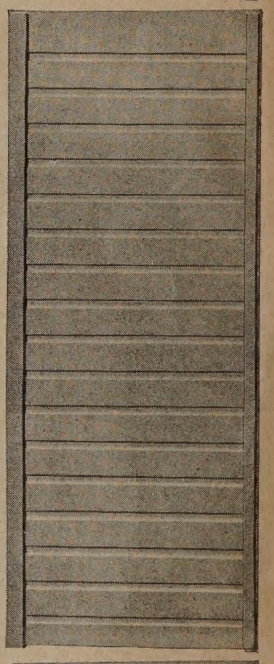

OUTSIDE WALL SECTION

On this and the opposite page we illustrate the different sections for our Simplex Ready Made Buildings as specified throughout this catalog. All sections are uniform in size, being 3 feet wide by 8 feet high, except in the case of such sections as double door sections, which are 6 feet wide by 8 feet high. The dimensions of gable sections are governed by the width of the building.

The picture in the circle below shows how simple and easy is the construction of our Ready Made Buildings when furnished in sections, such as we illustrate on these two pages. They fit together by means of tongued and grooved joints and are bolted solidly together at the sills and plates.

For actual length of time required to put up a three-room house see page 27.

NOTE—While we specify Green Fire-Chief Shingle Roll Roofing for most of our Ready Made Buildings, you can have this roofing dark red in color if you prefer, or you can have Roma-Tile Roofing in either red or green. **Be sure to mention choice.**

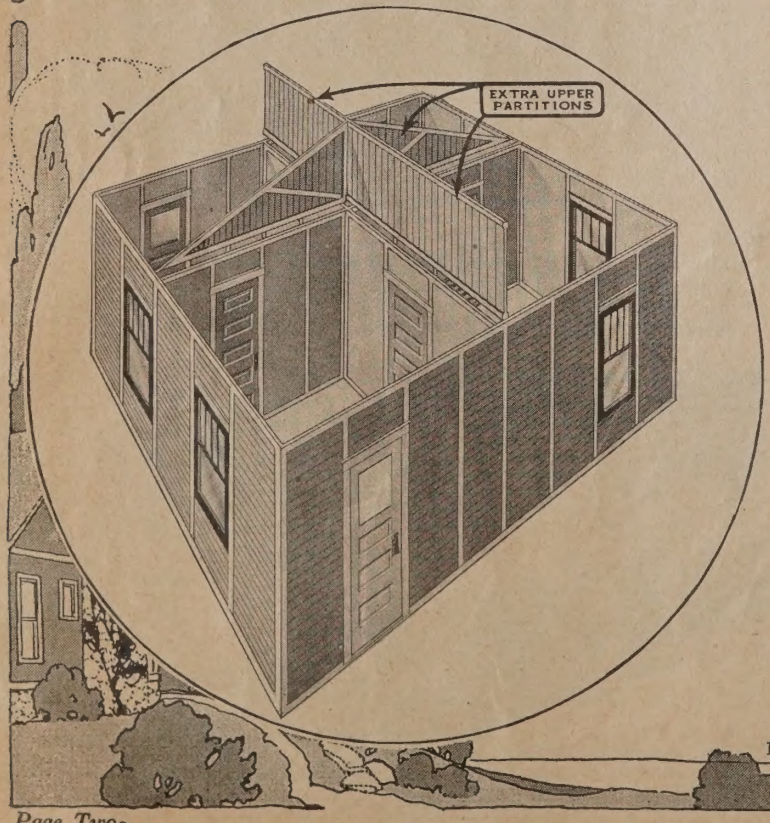

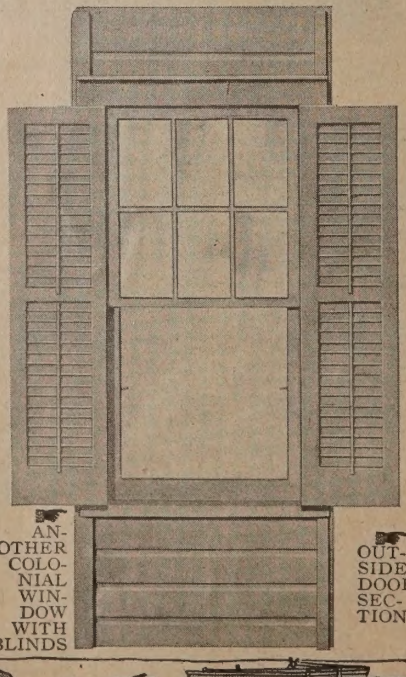

ANOTHER COLONIAL WINDOW WITH BLINDS

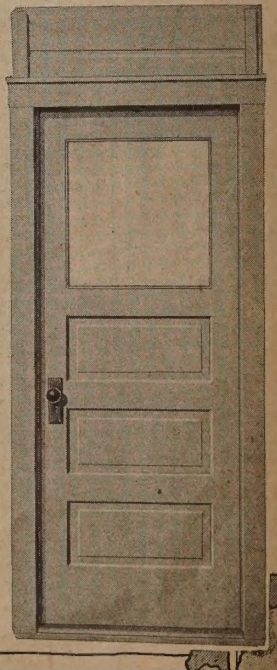

OUTSIDE DOOR SECTION

Ready to be Put Together

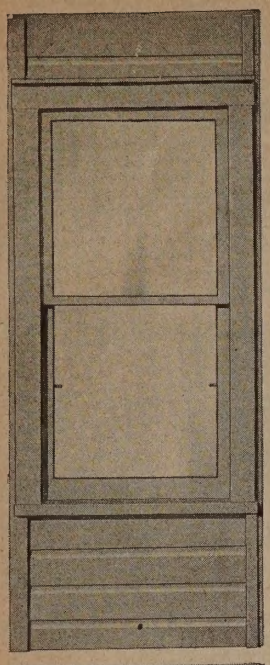

TWO-LIGHT WINDOW SECTION

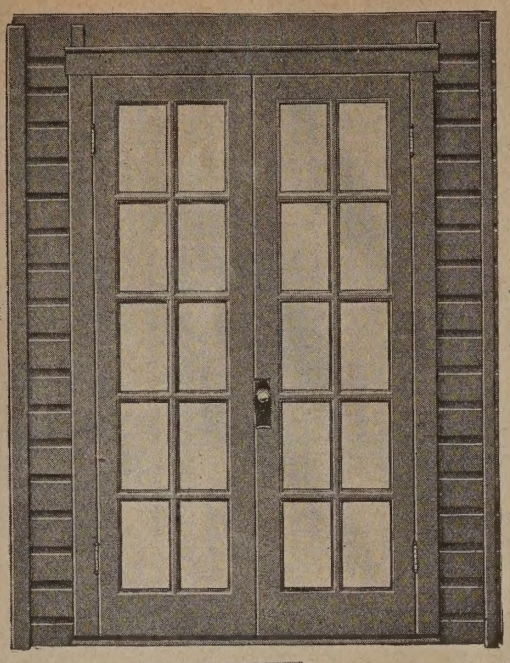

FRENCH DOOR SECTION

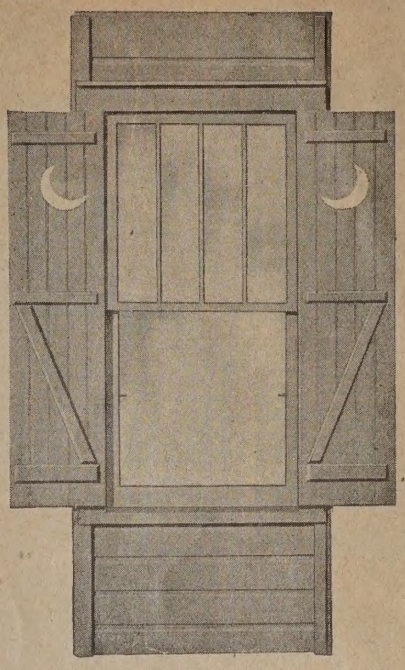

COLONIAL WINDOW SECTION WITH SHUTTERS

INSIDE PARTITION SECTION

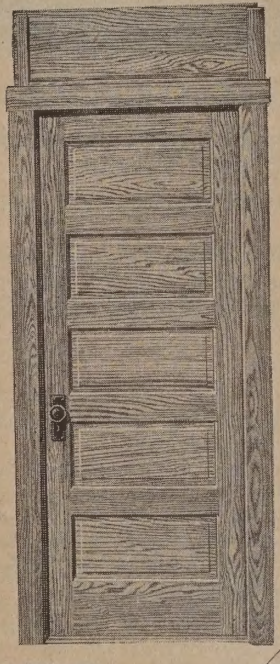

INSIDE DOOR SECTION

The picture in the circle below shows how by applying wall board to the interior of your Ready Made Building you get **double wall construction,** making the building warm enough for almost any climate. This is what many of our customers regularly do. You will find some of their letters throughout this book.

In the small circle we also illustrate the actual thickness of the wall board itself, and in the upper left hand corner we show the construction of the wall board, illustrating how the three sheets of heavy fiber board are firmly cemented together by damp resisting and heat retaining asphalt.

Please bear in mind that all of these sections come to you complete, just as illustrated, the windows and doors being already installed. You have no hinges or locks to put in place. We do all of that for you at our factory.

Also, please remember that when you order wall board for your Ready Made Building you do not need the extra upper partitions illustrated on the opposite page, because when the rooms are ceiled the space above is closed from view. With the wall board we furnish ceiling joists, nailing strips, panel strips, baseboard, quarter round molding and nails.

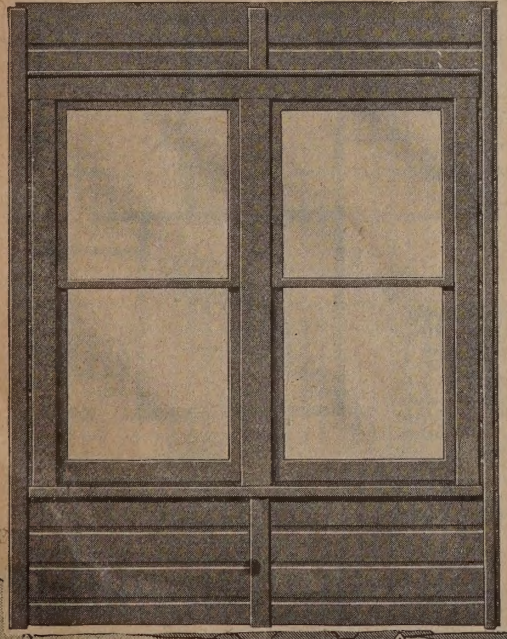

MULLION WINDOW SECTION

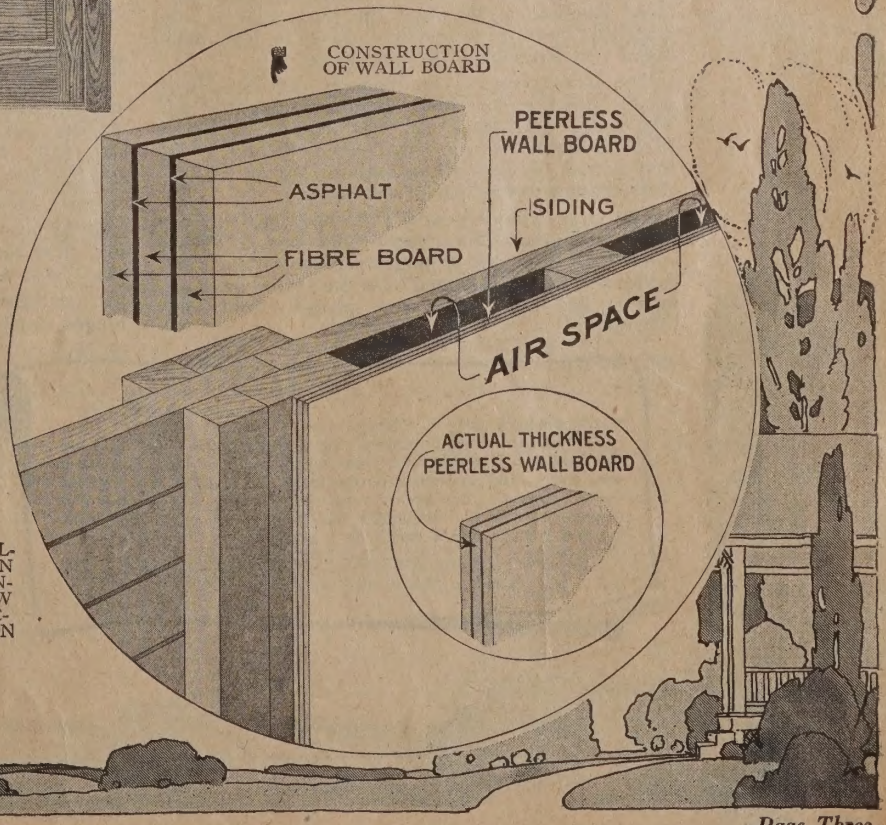

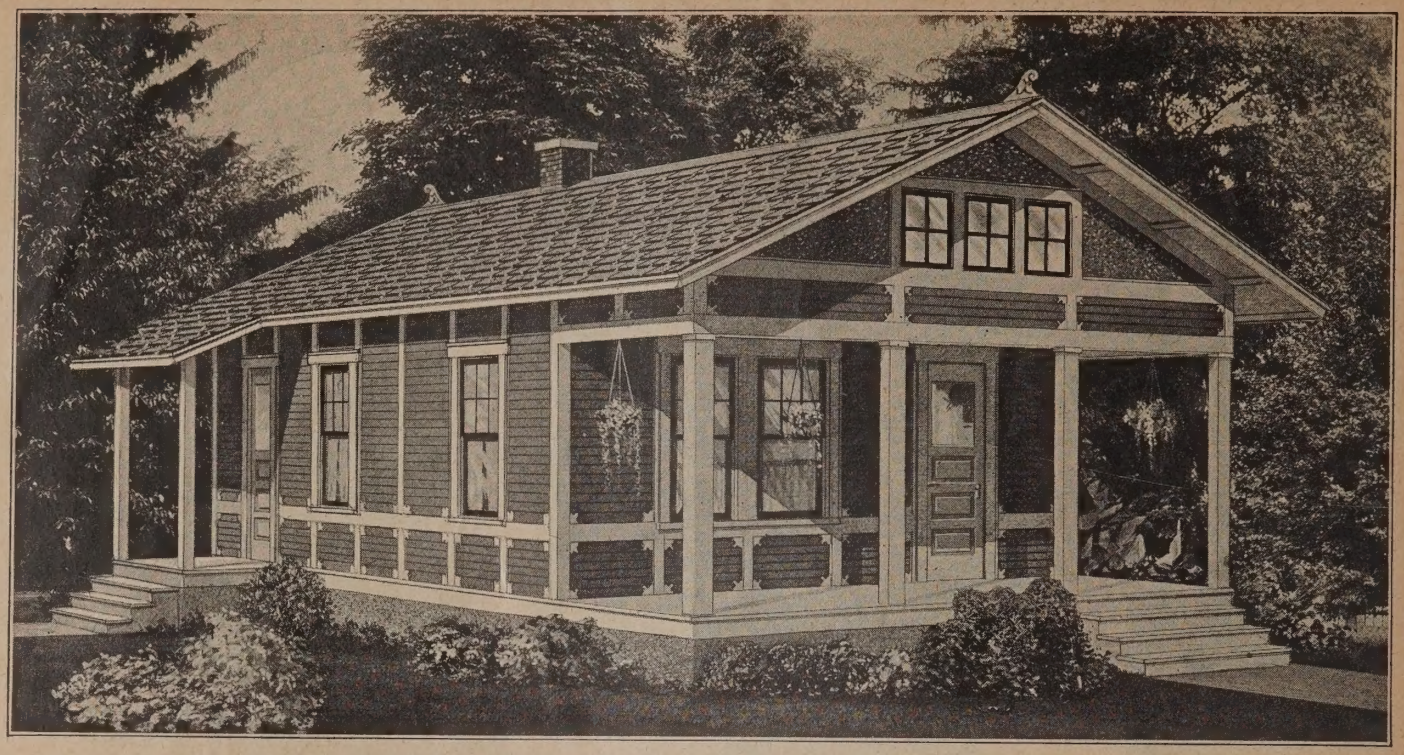

The SILVERHORN

Four-Room Ready Made House With Two Porches. 55C112 Price, $881.00

You'll like the arrangement of the Silverhorn, it is simple, compact, convenient and homelike in every respect. The living room and alcove combined make one room across the front of the house. These can be separated with draperies, making two distinct rooms. A sanitary couch can be placed in the alcove and used as an extra room when company comes to stay over night.

This cottage presents a very fine appearance. The walls are made attractive with panel work and brackets, which may be painted to match the door and window casings, thus forming a pleasing contrast with the body color of the building. The gable is finished with Sea Green Slate Surfaced Roofing and fitted with three four-light windows. (See illustration.)

Our seventeen-year guaranteed Fire-Chief Shingle Roll Slate Surfaced Roofing on the roof, the side walls painted gray, and the corner brackets along the base make this a very handsome dwelling house.

The front porch is handsomely decorated with square posts and a solid spandrel along the top. The small side porch is a new feature in Ready Made Buildings and a very convenient one, giving easy access to the kitchen without having to walk clear around to the rear of the house.

The large windows have the upper half divided into six lights. The living room has a double window in front and a single window on the side. Additional light is obtained from the alcove windows, making the living room very pleasant and comfortable.

A four-room cottage of such neat design and at so low a price is well worth having and represents unusually big value for the money invested.

There are practically four rooms in this house, for in addition to the living room, bedroom and kitchen, there is a good size alcove 6 feet wide and 10 feet deep, large enough for a sanitary couch. (See illustration showing floor plan.)

During Summer the large front porch may be screened and used as an extra sleeping room. The cost of screening porch, 55C112, is only $72.00 extra; and for 55C112E, $81.00 extra. These prices include screen sections covered with 12-mesh wire screening, and ready to fit in place; also the screen door for entrance, including hinges, latch and spring.

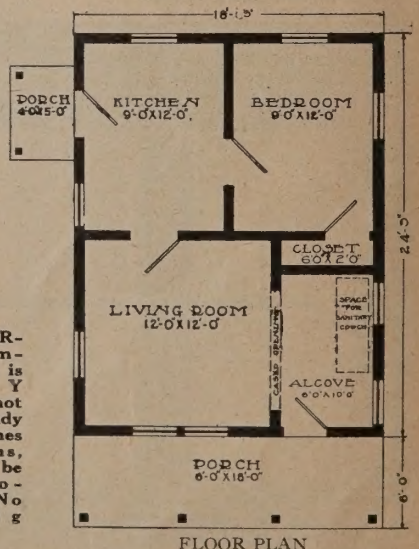

FLOOR PLAN

Austin, Neb.

Sears, Roebuck and Co., Chicago, Ill.

Gentlemen:—When I received your portable house I had it up and the family in it within forty-eight hours and they have lived in it ever since. By papering it on the inside it has done very well for the Winter and it has been a very cold Winter. I have never had occasion to take it down and it has been a very useful house for me and it looks like it would be a useful house for a good many years yet.

Very truly yours,
JOHN VANDERGRIFT.

THE SILVERHORN Simplex House is READY MADE — not merely ready cut. It comes in sections, ready to be bolted together. No nailing necessary.

THE LIVING ROOM AND ALCOVE.

THIS PICTURE SHOWS YOU HOW ATTRACTIVE THE ROOMS CAN BE MADE WHEN LINED WITH OUR PEERLESS WALL BOARD AND PAINTED OR KALSOMINED.

Specifications for Four-Room Cottage 55C112 With Two Porches

See Illustration and Floor Plan on Opposite Page.

SIZE OF HOUSE INSIDE—18 feet wide by 24 feet deep.

PORCH—Front porch, 18 feet wide by 6 feet deep; side porch, 5 feet wide by 4 feet deep.

LIVING ROOM—12 feet wide by 12 feet deep.

ALCOVE—6 feet wide by 10 feet deep.

BEDROOM—9 feet wide by 12 feet deep, with closet 6 feet long and 2 feet deep.

KITCHEN—9 feet wide by 12 feet deep.

WINDOWS AND DOORS—Nine glazed two-light windows, glass size 24x26 inches, upper sash divided; window opening size, 2 feet 4⅛ inches by 4 feet 10 inches. Three glazed sash in gable. Each sash has four lights, glass size 8x10 inches. Two outside doors with upper half glazed. Three inside doors, five-cross panel. Size of doors, 2 feet 6 inches wide by 6 feet 6 inches high by 1⅜ inches thick. No. 1 quality. Cased opening between living room and alcove, size 8 feet wide by 6 feet 6 inches high.

FOUNDATION—We furnish with the house cedar foundation posts 6 inches in diameter, 2 feet 6 inches long. Brick, stone or cement are not furnished.

SILLS—3x6 inches No. 1 yellow pine, which rest on foundation posts.

FLOOR JOISTS—2x6-inch No. 1 yellow pine, hung in patent steel stirrups, 16 inches center to center.

FLOORING—$^{13}/_{16}$ inch thick by 3¼-inch face No. 1 yellow pine, dressed and matched, in sections 3 feet wide.

WALL SECTIONS—Made of No. 1 yellow pine drop siding, ¾ inch thick, dressed smooth on the inside. Height of wall, 8 feet.

PARTITION WALLS—Made of No. 1 yellow pine, ⅝ inch thick, dressed and beaded, in sections 3 feet wide by 7 feet 10 inches high.

WINDOW AND DOOR FRAMES—Good quality window and door frames; doors and windows are hung in their frames and include hardware.

ROOFING BOARDS—Made of No. 1 yellow pine, ⅝ inch thick, dressed and beaded on the under side. In sections 3 feet wide.

ROOFING—Sea Green Fire-Chief Shingle Roll Slate Surfaced Roofing, guaranteed to wear seventeen years without leaking or changing color.

HARDWARE—All necessary hardware is fitted in place and furnished with the house; a galvanized steel chimney is included.

PAINTING—Entire house and porch painted on the outside with one coat of gray paint.

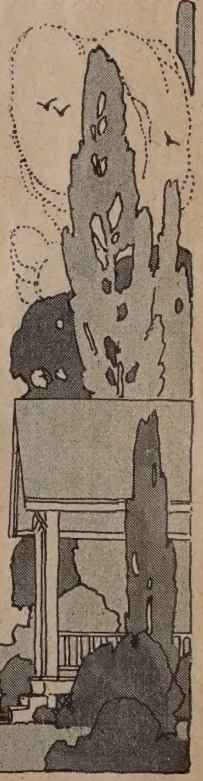

55C112—Simplex Ready Made House. Shipping weight, about 12,500 pounds.
Price **$881.00**

55C112E—Simplex Ready Made House with porch 8 feet deep instead of 6 feet deep. Shipping weight, about 13,000 lbs.
Price **$909.00**

Peerless Wall Board (see page 53), plain brown finish, for lining and ceiling (**double wall construction**), add $159.00.
Upper partitions extending to roof, add $29.00.
Screen sections for 6-foot porch, with door, add $72.00.
Screen sections for 8-foot porch, with door, add $81.00.
Front porch ceiling, add $14.00.
Shutters for doors and windows, add $34.80.
Half screens for windows and screen doors, add $21.65.
If foundation posts are not wanted, deduct $11.00.

Price of wa l board includes 2x4-inch ceiling joists, panel strips, baseboard, quarter round and nails. The wall board sheets are 3 feet wide and cut in proper lengths to fit ceiling, any window, door or plain wall section. Not a piece to cut.

Shipping weight of Wall Board and accessories, about 2,000 pounds.

House shipped from factory in SOUTHERN ILLINOIS.

Wall Board shipped from factory in OHIO.

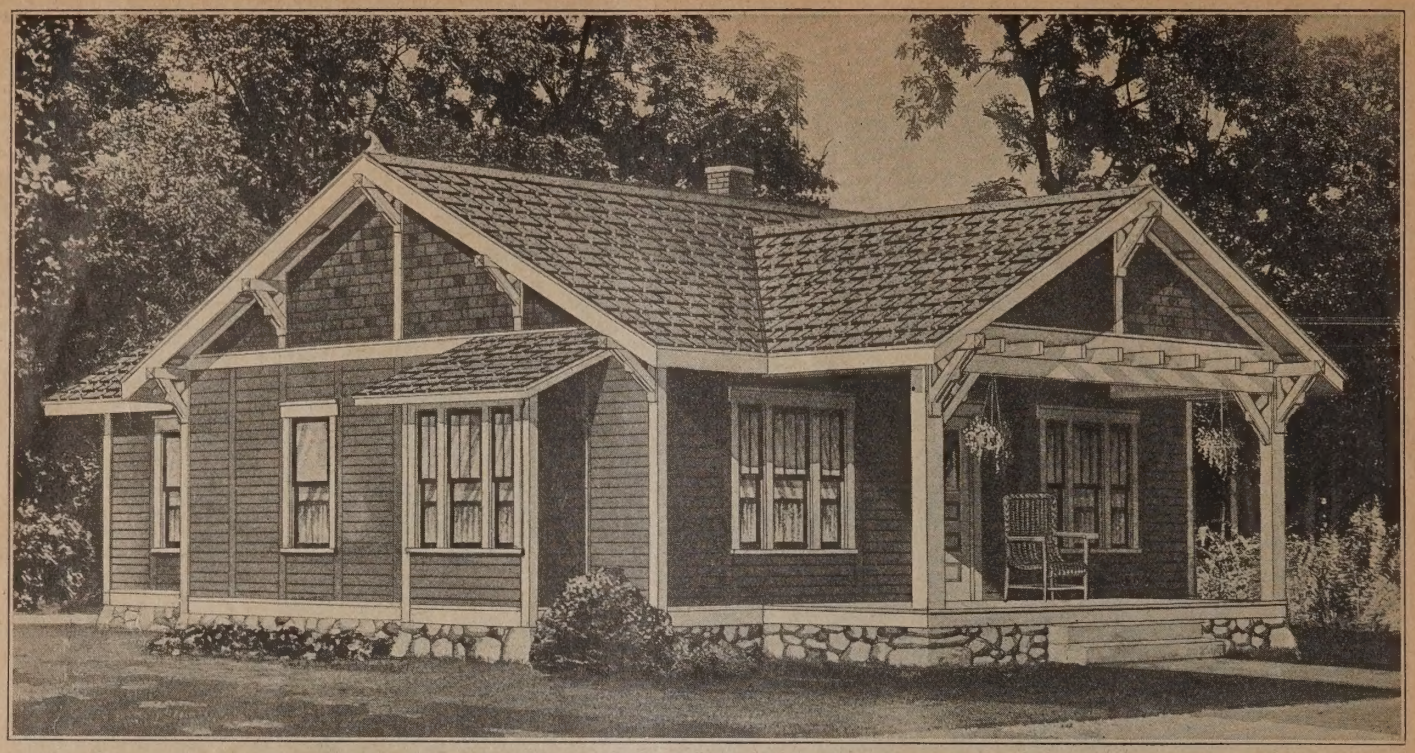

The STRAND

Five-Room Ready Made House With Large Front Porch 55C187 Price, $1,343.00

The Strand is built for solid comfort and is a design that will make a very beautiful Summer cottage, or all year around residence. The living room has a large bay window at one end, then there is a large cased opening between the living room and dining room. With this arrangement these two rooms can be combined, making one long room running clear across the front of the house. Another excellent feature of these rooms is the generous number of windows. You will like this idea. The bedrooms are the convenient size. Each have clothes closets. The kitchen gives easy access to the dining room and has a pantry which is one of the most useful features in connection with this room. You will like the Strand with its large front porch, square columns, pergola rafters and wide overhanging eaves.

We submit this house as a leader in quality, design and price. It takes an expert to tell it from a high priced bungalow at three or four times the cost. Note the extra large Colonial windows. The roof is covered with our Sea Green Fire-Chief Shingle Roll Roofing, guaranteed not to leak or to lose its rich color during seventeen years' service. The gables are shingled with red cedar shingles, which when stained with a suitable contrasting color make the bungalow effect still more pronounced.

Peerless Wall Board, described on page 53, may be used as a substitute for lath and plaster in lining Ready Made House 55C187. The house will then serve as a comfortable dwelling the year around and the cost will be kept low by the big saving in labor expense. A complete house with walls, floor and roof in sections can be bolted together at a surprisingly small outlay.

Chappaqua, N. Y.

Sears, Roebuck and Co., Chicago, Ill.

Dear Sirs:—The ready made buildings you sent me have proved very satisfactory; in fact, I have been so well pleased with them that I have gone to the extra expense of putting cellars underneath.

Yours truly,
MRS. M. H. WITHERYCOMB,
Supt. of Children's Aid Society.

You will see by the floor plan that after the proper space has been allowed for furniture, there is plenty of room in the Strand.

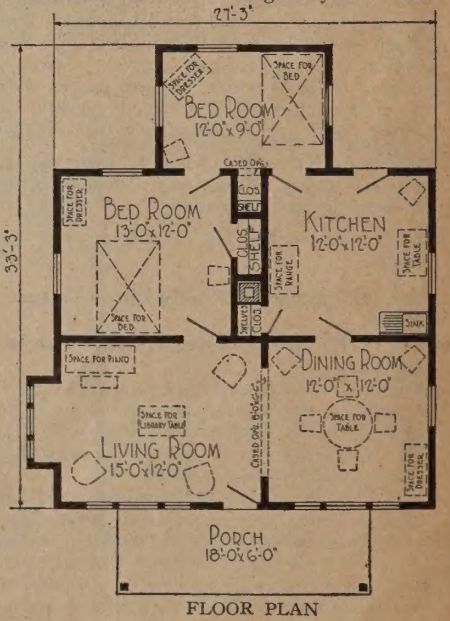

FLOOR PLAN

Remember, our Simplex Houses are READY MADE—not merely ready cut. They come in sections, ready to be bolted together. No nailing necessary.

THE LIVING ROOM
CAN BE MADE WARM ENOUGH
FOR ALL YEAR USE WHEN
LINED WITH OUR PEERLESS
WALL BOARD

THE DINING ROOM
NOTICE HOW THE PLATE RAIL
AND PANELING ADD TO
THE APPEARANCE

Specifications for Our Handsomest Five-Room Ready Made Bungalow With Large Front Porch 55C187

SIZE OF HOUSE (INSIDE)—27 feet wide by 33 feet deep.

PORCH—18 feet wide by 6 feet deep.

LIVING ROOM—15 feet wide by 12 feet deep, with a bay window, 6 feet wide by 2 feet deep.

DINING ROOM—12 feet wide by 12 feet deep. Entered from the living room by a cased opening, 8 feet wide.

BEDROOM—13 feet wide by 12 feet deep.

BACK BEDROOM—12 feet wide by 9 feet deep.

KITCHEN—12 feet wide by 12 feet deep.

CLOSETS—Closet in front bedroom, 2 feet deep by 4 feet 6 inches long. Closet in rear bedroom is 2 feet wide by 3 feet long. Pantry in kitchen, 2 feet deep by 4 feet 6 inches long.

WINDOWS AND DOORS—Three large triple window groups, 6 feet wide and 4 feet 10 inches high, include one large glazed window in the center 20 by 26 inches, upper sash divided three lights, opening size, 2 feet ⅛ inch wide by 4 feet 10 inches high, one small glazed window on each side 12x26 inches, upper sash divided two lights, opening size, 1 foot 4⅛ inches wide by 4 feet 10 inches high; also six glazed two-light windows 24 by 26 inches, opening size, 2 feet 4⅛ inches wide by 4 feet 10 inches high; one high sash, 24x26 inches; one light in right side rear bedroom. Front and rear doors glazed, size 2 feet 6 inches wide by 6 feet 6 inches high, 1⅜ inches thick. Six inside doors, size 2 feet 6 inches wide by 6 feet 6 inches high, 1⅜ inches thick, five cross panels. All No. 1 quality.

FOUNDATION—We furnish with the house cedar foundation posts 6 inches in diameter, 2 feet 6 inches long. Brick, stone or cement are not furnished.

SILLS—3x6-inch No. 1 yellow pine and rest on foundation posts.

FLOOR JOISTS—2x6-inch No. 1 yellow pine, hung in patent steel stirrups, 16 inches on center.

55C187—Simplex Ready Made House. Shipping weight, about 18,700 pounds.
Price.....**$1,343.00**

55C187E—Simplex Ready Made House with porch 8 feet deep instead of 6 feet deep. Shipping weight, about 19,100 pounds.
Price.....**$1,378.00**

Peerless Wall Board (see page 53), plain brown finish, for lining and ceiling, **(double wall construction)**, add $279.00.
Upper partitions extending to roof, add $55.00.
Screen sections for 6-foot porch, with door, add $71.00.
Screen sections for 8-foot porch, with door, add $81.00.
Half screens for windows and screen doors, add $27.45.
Shutters for doors and windows, add $55.80.
If foundation posts are not wanted, deduct $16.00.

Price of wall board includes 2x4-inch ceiling joists, panel strips, baseboard, quarter round and nails. The wall board sheets are 3 feet wide and cut in proper lengths to fit ceiling, any window, door or plain wall section. Not a piece to cut.

House shipped from factory in SOUTHERN ILLINOIS. Wall Board shipped from our factory in OHIO.

FLOORING—$^{13}/_{16}$ inch thick by 3¼-inch face No. 1 dressed and matched yellow pine, in sections 3 feet wide.

WALL SECTIONS—No. 1 yellow pine drop siding, ¾ inch thick, dressed smooth on the inside. Height of wall sections, 8 feet high by 3 feet wide.

PARTITION WALLS—Made of No. 1 yellow pine, ⅝ inch thick, dressed and beaded, in sections 3 feet wide by 7 feet 10 inches high.

WINDOW AND DOOR FRAMES—Good quality window and door frames; doors and windows are hung in their frames and fitted with hardware.

ROOFING BOARDS—Made of No. 1 yellow pine, ⅝ inch thick, dressed and beaded on the under side. In sections 3 feet wide.

ROOFING—Sea Green Fire-Chief Shingle Roll Roofing, guaranteed to wear seventeen years without leaking or changing color.

HARDWARE—All necessary hardware is fitted in place and is furnished with the house; a galvanized steel chimney included.

PAINTING—Entire house and porch painted on the outside with one coat of gray paint, except cedar shingled gables, which are furnished in natural color.

When screened porch is ordered, pergola rafters are not furnished.

Porch ceiling is furnished without extra charge.

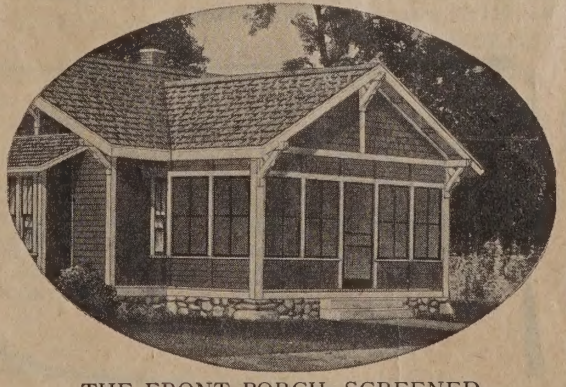

THE FRONT PORCH, SCREENED

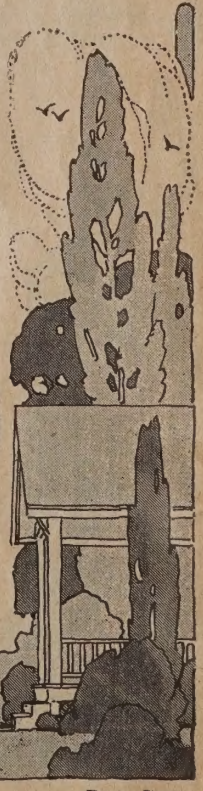

The YELLOWSTONE

Four-Room Ready Made House With Porch and Bathroom 55C205 Price, $1,032.00

In the Yellowstone Ready Made House 55C205 we have provided a design that can be used for many years as a permanent residence. The bathroom is a new feature in ready made buildings, so that living arrangements can be made perfectly modern. Cost of bathroom fixtures not included in price.

With a house of this kind erected in a farming country, among the hills, on the seashore or lakeside, all the pleasures of modern life can be enjoyed. The material is first class in every respect. The design is artistic and, with Fire-Chief Shingle Roll Slate Surfaced Roof, Sea Green Slate Surfaced Roofing for panels, and spacious front porch. The gables are covered with our Oriental Green Slate Surfaced Roofing and paneled, which adds greatly to the appearance. It is hard to tell this from stucco finish. This house will present a striking appearance even when set up in a neighborhood where high class permanent residences are erected. If desired, the rear portion, consisting of kitchen, bathroom and closet, can be omitted and one of the bedrooms used as a kitchen. If wanted in this way, we will furnish Ready Made House 55C207 for $794.00. The partitions in this house are 8 feet high; rear addition slopes from 8 feet to 7 feet 6 inches. Partitions extending to the roof furnished for $11.50 extra. See opposite page.

"Back to the land" is the cry now heard on every side. No one questions the desirability of the movement to relieve the congestion of the cities and utilize the vast areas that still remain unoccupied. Hundreds of thousands of people would like to enjoy the pure country air and to get the benefit of the fruits of the earth. It has been demonstrated that even on one acre of land within riding distance from the centers of trade, a large family can be supplied with vegetables and fruits practically free from expense during the entire season. The chief difficulty that presents itself to the man who is anxious to move his family to the country is the cost of putting up a permanent residence. In this case the ready made house solves the problem. It is low in cost, can be put up by any handy person, and by the use of Peerless Wall Board will be warm enough in any climate.

Reading Center, N. Y.

Sears, Roebuck and Co., Chicago, Ill.

Gentlemen:—The portable house I purchased of you in 1910 has given entire satisfaction. Have made it my home on a farm since that time and have found it very comfortable. Of course, to increase the warmth I sealed it with ⅜-inch ceiling in connection with building paper. As the Winters are quite severe here, found it necessary to do this, although I think in a milder climate it would have been unnecessary.

Very truly yours,
C. H. CONKLIN.

Remember, our Simplex Houses are READY MADE—not merely ready cut. They come in sections, ready to be bolted together. No nailing necessary.

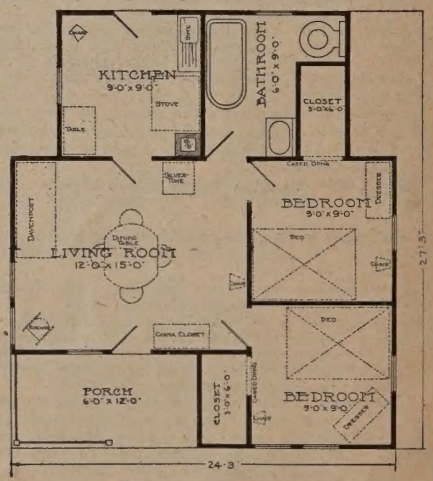

FLOOR PLAN.

THE
LIVING ROOM

Specifications for Our Attractive Seaside Cottage 55C205

SIZE OF HOUSE (INSIDE)—24 feet wide by 27 feet deep.

PORCH—12 feet wide by 6 feet deep.

LIVING ROOM—15 feet wide by 12 feet deep.

BEDROOM—9 feet wide by 9 feet deep.

REAR BEDROOM—9 feet wide by 9 feet deep.

BATHROOM—6 feet wide by 9 feet deep.

KITCHEN—9 feet wide by 9 feet deep.

CLOSETS—Two closets 6 feet long and 3 feet deep.

WINDOWS AND DOORS—Nine glazed windows, sliding sash, glass size 24x26 inches; window opening size 2 feet 4⅛ inches by 4 feet 10 inches. Two glazed doors, size 2 feet 6 inches by 6 feet 6 inches, 1⅜ inches thick. Four five-cross panel doors, size 2 feet 6 inches by 6 feet 6 inches, 1⅜ inches thick. All No. 1 quality.

FOUNDATION—We furnish with the house cedar foundation posts 6 inches in diameter, 2 feet 6 inches long. Brick, stone or cement are not furnished.

SILLS—3x6-inch No. 1 yellow pine which rest on foundation posts.

FLOOR JOISTS—2x6-inch No. 1 yellow pine, hung in patent steel stirrups 16 inches on centers.

FLOORING—$^{13}/_{16}$ inch thick by 3¼-inch face No. 1 yellow pine, dressed and matched, in sections 3 feet wide.

WALL SECTIONS—No. 1 yellow pine drop siding, ¾ inch thick, dressed smooth on the inside. Height of wall sections, 8 feet.

PARTITION WALLS—Made of No. 1 yellow pine, ⅝ inch thick, dressed and beaded, in sections 3 feet wide by 7 feet 10 inches high.

ROOFING BOARDS—Made of No. 1 yellow pine, ⅝ inch thick, dressed and beaded on the under side. In sections 3 feet wide.

WINDOW AND DOOR FRAMES—Good quality window and door frames; doors and windows are hung in their frames and fitted with hardware.

ROOFING—Sea Green Fire-Chief Shingle Roll Slate Surfaced Roofing, guaranteed to wear seventeen years without leaking or changing color.

HARDWARE—All necessary hardware is furnished with house and is fitted in place; a galvanized steel chimney is included.

PAINTING—Entire house and porch painted on the outside with one coat of gray paint.

55C205—Simplex Ready Made House. Shipping weight, about 12,800 pounds.
Price **$1,032.00**

55C206—Simplex Ready Made House, made 3 feet deeper, increasing the front porch to 12x9 feet, the front bedroom to 9x12 feet, and the closet to 3x9 feet. Shipping weight, about 13,800 pounds.
Price **$1,141.00**

55C207—Simplex Ready Made House, including living room, two bedrooms, closet and porch, without rear addition. Shipping weight, about 9,700 pounds.
Price **$794.00**

Peerless Wall Board (see page 53), plain brown finish, for lining and ceiling (**double wall construction**), 55C205, add $188.00; 55C206, add $204.00; 55C207, add $121.00
Upper partitions extending to roof for 55C205 or 55C207, add 11.50
Upper partitions extending to roof for 55C206, add 12.50
Screen sections for 6-foot porch, with door, add 42.00
Screen sections for 9-foot porch, with door, add 50.00
Porch Ceiling for 55C205 or 55C207, add $9.00; 55C206, add 11.00
Half screens for windows and screen doors, for 55C205, 55C206 or 55C207, add 21.65
Shutters for Doors and Windows, 55C205, 55C206 or 55C207, add 34.80
If foundation posts are not wanted, deduct 11.50

Price of wall board includes 2x4-inch ceiling joists, panel strips, baseboard, quarter round and nails. The wall board sheets are 3 feet wide and cut in proper lengths to fit ceiling, any window, door or plain wall section. Not a piece to cut.
House shipped from factory in SOUTHERN ILLINOIS. Wall Board shipped from factory in OHIO.

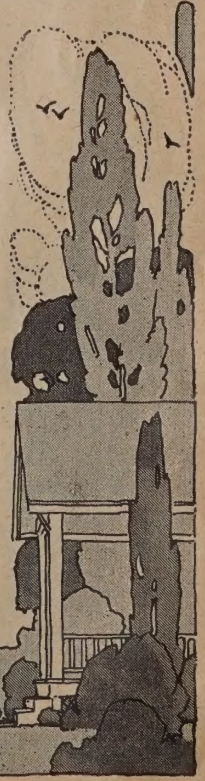

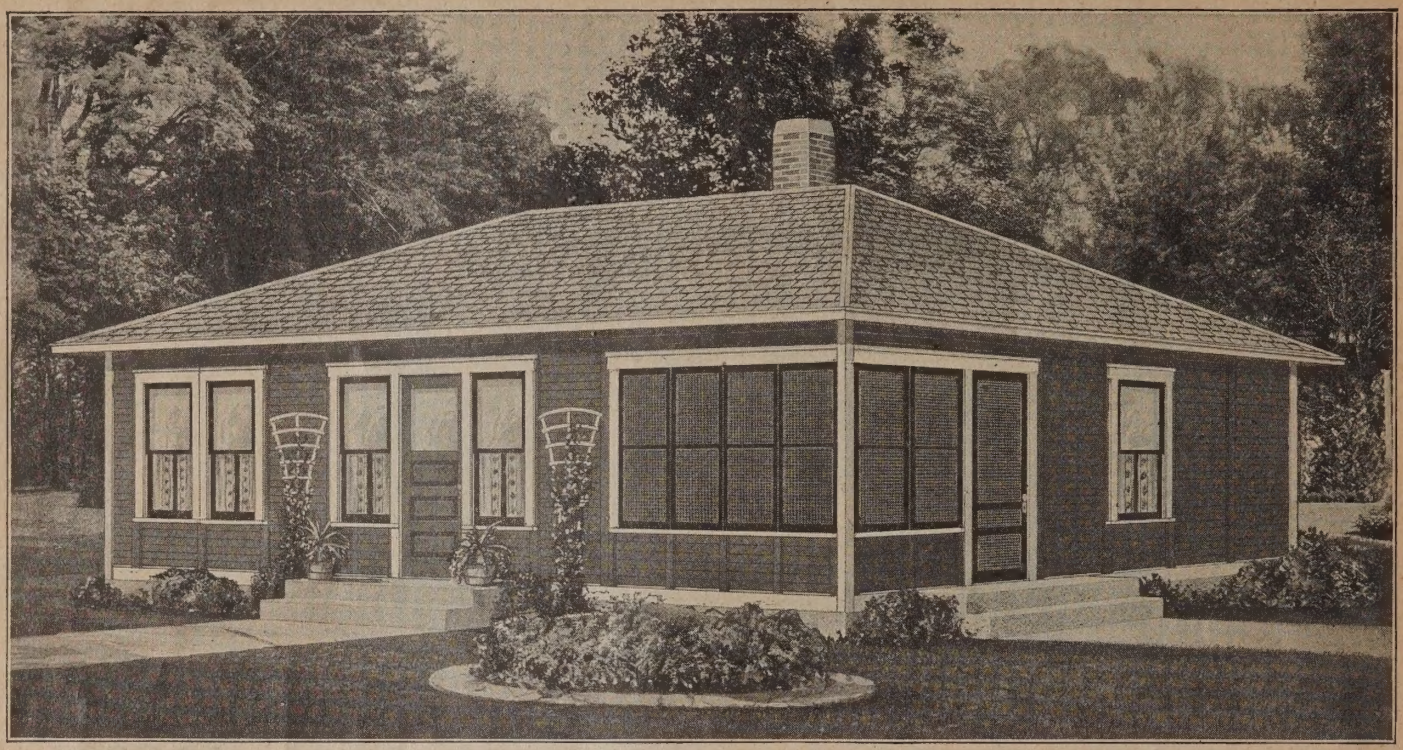

The WASHINGTON

Five-Room Ready Made House With Screened Porch. 55C136 Price, $1,090.00

The U. S. Department of Agriculture has prepared a scientific design of house of a size consistent with the needs and convenience of the average family. Realizing the importance of this proposition and knowing that it will be of interest to thousands of builders everywhere, Sears, Roebuck and Co. have decided to furnish the material for this model farm house at their usual money saving prices. As the cost of labor is practically cut out, our price for the materials for this model farm house represents about the total cost for the house complete.

Our Ready Made Farm House 55C136, modified so as to be better adapted to the Ready Made type of construction, is arranged for the greatest economy of floor space. Not a square foot of area is wasted. Allowance is made for every necessary article of furniture, so situated in relation to door and window openings as to take up the least amount of room possible. The cost has been kept remarkably low by omitting such projections as bay windows, gables and dormers, and by choosing a four-cornered practical looking structure, which is made neat and tasteful in appearance by a careful grouping of the doors and windows, instead of by adding expensive and useless decorations.

This is really a five-room house, as the screened porch can be used as a play room, sleeping porch or work room. This size dwelling house at $1,090.00 represents unusually high value for the money.

There is an entrance by way of the screened porch, from which one door leads directly into the living room and dining room; the other door leads into the kitchen. This arrangement permits the men to wash and leave their raincoats, boots, etc., within the porch, from which they can pass into the dining room and living room without disturbing the women in the kitchen.

In the Summer the screened porch is one of the most pleasant and livable nooks in the house. Much of the kitchen work, such as washing or ironing, can be done there. It is practically out of doors, but well sheltered from the sun. There is room enough for an ice box, churn, brooms, mops and pails.

The kitchen is pleasantly located at one corner of the building and commands a view of the road, garden, barns and lawn. It is so ventilated that the fumes and heat from the cook stove will blow directly out of doors and not pass through the rest of the house. The stove is within 6 feet of the most distant fixture in the kitchen and but little farther from the dining table. Close to the kitchen door is a good location for a dust trap for kitchen sweepings. This could lead under the floor through a chute and could be emptied from the outside. A work table may be placed directly in front of the window, with a fuel box underneath. The sink and cupboard are within easy reach of one another, being separated only by a good size window.

The living room and dining room are combined as one large room. The windows at both ends of the living and dining room may be opened wide, giving a cool breeze through the house in the Summertime.

The alcove bedroom is entered from the living room side by a large cased opening, in which portieres may be hung. The other bedroom is entered from the dining room side. Being situated at the corners of the house, these bedrooms command a view in two directions. Two closets are provided, one for each bedroom.

The various articles have been shown on the floor plan as a guide in furnishing the house and are not included in the price.

160 Greenwich St., New York, N. Y.

Sears, Roebuck and Co., Chicago, Ill.

Gentlemen:—I have found your portable house which I bought two years ago of great service to me and I have had it in several places within that time. I would be very much interested in a new catalog of what you now offer. Yours very truly,

F. MITCHELL.

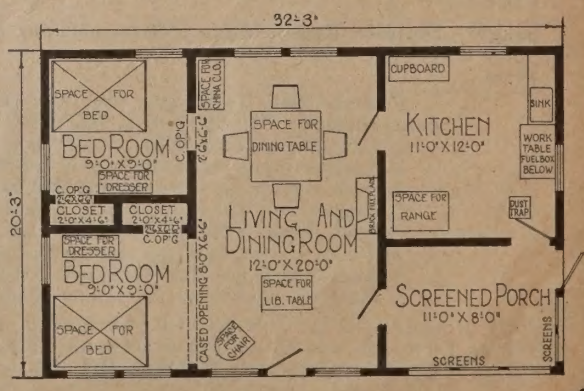

THE SCREENED PORCH
IS A FINE PLACE TO ENTERTAIN YOUR COMPANY
ON WARM SUMMER EVENINGS.

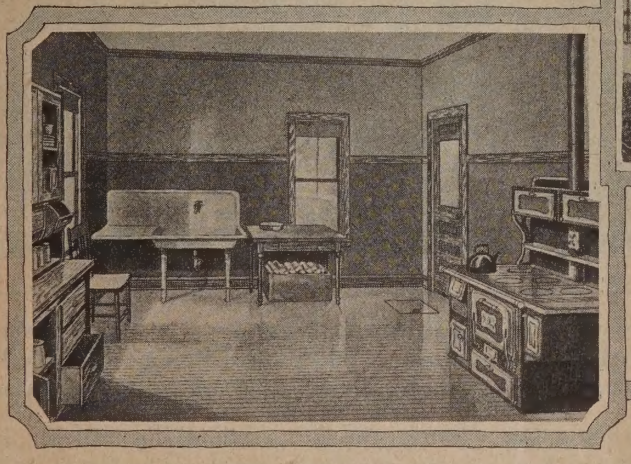

THE COMBINED LIVING AND DINING ROOM
IS AN EXCELLENT FEATURE

THE KITCHEN IS CONVENIENTLY ARRANGED.

Interior Views of Ready Made House 55C136

These interior views of the kitchen, at the left, and of the combined living and dining room on the right, show how attractively these rooms can be decorated by the use of Peerless Wall Board.

Specifications for Ready Made Farm House 55C136

SIZE OF HOUSE (INSIDE)—20 feet wide by 32 feet deep.

PORCH—8 feet wide by 11 feet deep. Wire screens fitted in frames furnished for sides of porch, together with a screen door 2 feet 6 inches wide by 6 feet 6 inches high.

LIVING ROOM—Living room and dining room are combined in one large room 20 feet deep by 12 feet wide.

ALCOVE BEDROOM—9 feet wide by 9 feet deep with a closet 4 feet 6 inches wide by 2 feet deep. The cased opening between bedroom and living room is 8 feet wide by 6 feet 6 inches high.

SECOND BEDROOM—9 feet wide by 9 feet deep with a closet 4 feet 6 inches wide by 2 feet deep. The cased opening between bedroom and dining room is 2 feet 6 inches wide by 6 feet 6 inches high.

KITCHEN—12 feet wide by 11 feet deep.

DOORS AND WINDOWS—Three outside doors, upper half glazed with clear select glass, leading to kitchen and living room. One inside five-cross panel door leading from living room to kitchen. All doors made of No. 1 quality lumber, size 2 feet 6 inches wide by 6 feet 6 inches high by 1⅜ inches thick. Eleven glazed two-light windows, glass size 24x26 inches. Window opening size, 2 feet 4½ inches by 4 feet 10 inches.

FOUNDATION—We furnish with the house cedar foundation posts 6 inches in diameter, 2 feet 6 inches long. Brick, stone or cement are not furnished.

SILLS—Made of No. 1 yellow pine, size 3 inches by 6 inches and rest on foundation posts.

FLOOR JOISTS—Made of No. 1 yellow pine, size 2 inches by 6 inches; hung in patent steel stirrups, 16 inches on centers.

FLOORING—No. 1 yellow pine dressed and matched flooring $^{13}/_{16}$ inch thick by 3¼-inch face, in sections 3 feet wide.

WALL SECTIONS—No. 1 yellow pine drop siding, ¾ inch thick, dressed smooth on the inside. Height of wall section, 8 feet.

PARTITION WALLS—Made of No. 1 yellow pine, ⅝ inch thick, dressed and beaded, in sections 3 feet wide by 7 feet 10 inches high.

DOOR AND WINDOW FRAMES—Good quality door and window frames; doors and windows hung in their frames and fitted with hardware.

ROOFING BOARDS—Made of No. 1 yellow pine, ⅝ inch thick, dressed and beaded on the under side, in sections 3 feet wide.

ROOFING—Sea Green Fire-Chief Shingle Roll Slate Surfaced Roofing, guaranteed to wear and retain its color for seventeen years.

HARDWARE—All necessary hardware furnished with the house and fitted in place; a galvanized steel chimney is included.

PAINTING—Outside of building, including porch floor, is painted one coat of gray paint.

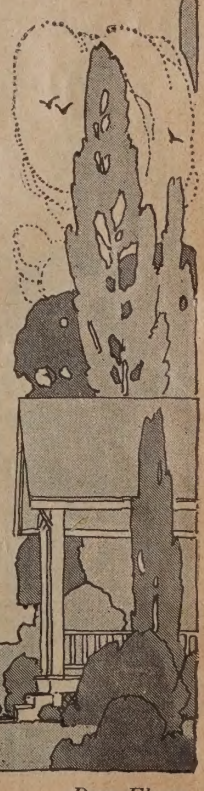

55C136—Simplex Ready Made House. Shipping weight, about 14,000 pounds.
Price..... **$1,090.00**

Peerless Wall Board (see page 53), plain brown finish, for lining and ceiling (**double wall construction**), add $199.00.
Upper partitions extending to roof, around kitchen only, add $14.50.
If foundation posts are not wanted, deduct $9.00.
Porch ceiling is furnished without extra charge.
Half screens for windows and screen doors, add $20.25.
Shutters for windows and doors, add $44.70.

Price of wall board includes 2x4-inch ceiling joists, panel strips, baseboard, quarter round and nails. The wall board sheets are 3 feet wide and cut in proper lengths to fit ceiling, any window, door or plain wall section. Not a piece to cut.

House shipped from factory in SOUTHERN ILLINOIS. Wall Board shipped from factory in OHIO.

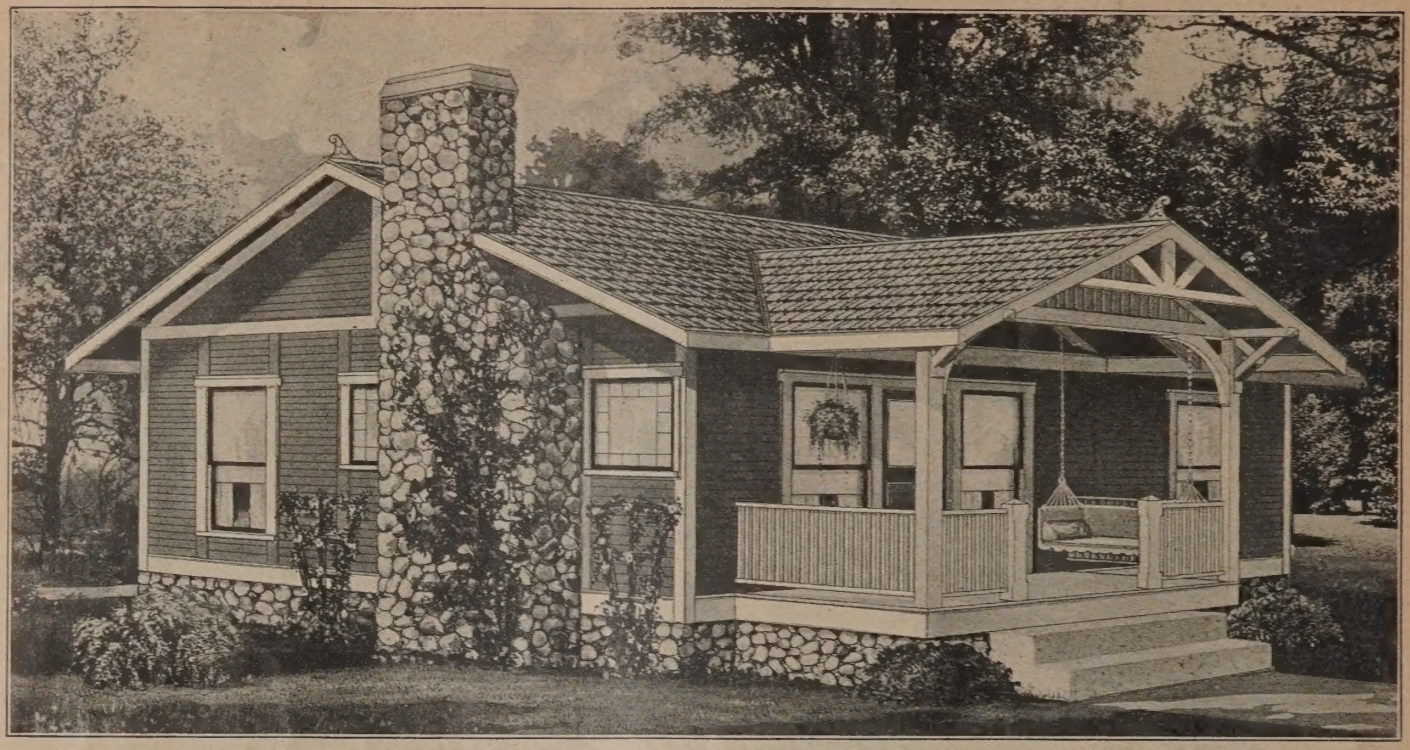

The ALPS

Five-Room Ready Made House With Two Porches **55C188** **Price, $943.00**

The Alps is a cozy, substantial, conveniently arranged bungalow. Notice the low overhanging roof, the large square columns, the plain Colonial porch brackets, and the railing around the front porch. Can't you picture to yourself the happiness of living in a bungalow like the Alps? When you step inside the front door into the living room you will notice a large cased opening 8 feet by 6 feet 6 inches high connecting living and dining room. Then, as you look around through the other rooms in the Alps you will see they are all well lighted and ventilated. In fact, every nook and corner gives one a feeling of comfort and cheer. The entrances to the two bedrooms are cased openings, 2 feet 6 inches wide by 6 feet 6 inches high, and look very attractive when closed with portieres. If doors are wanted for these openings, the extra charge will be only $6.00 each, including hardware fitted in place.

This well arranged, attractive bungalow is a bargain at $943.00. It is shipped in sections and, with the simple instructions and blue prints which we furnish, two inexperienced men can erect the entire house in about two days. We do not furnish a stone chimney and mantel. A space is shown at the end of the living room where they can be built in by your mason. The wall can have openings cut to the desired size or can be furnished solid. If the fireplace is to be built in immediately, be sure to give us instructions regarding this when you order. If not mentioned, the wall will be furnished solid.

In the quality of material, the fitting of the sections and the construction of the frame this building is guaranteed equal to any other in the catalog. For the roof we furnish our beautiful Sea Green Fire-Chief Shingle Roll Slate Surfaced Roofing. A very handsome effect is produced by this Shingle Roll Roofing. For the walls, floor and roof good material is used throughout, as described in the specifications on the opposite page.

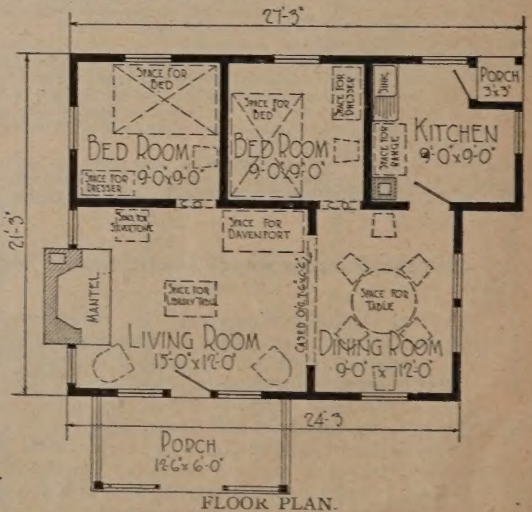

FLOOR PLAN.

504 W. 112th St., New York, N. Y.

Sears, Roebuck and Co., Chicago, Ill.

Dear Sirs:—Please send us one of your booklets on Ready Made Buildings. We have one of your houses now and it is satisfactory in every way. We have lost your book and would like to have you send us a new copy, as we are going to set up another one of your buildings.

Yours, T. F. HALLER, Jr.

Remember, our Simplex Houses are READY MADE—not merely ready cut. They come in sections ready to be bolted together. No nailing necessary.

THE LIVING ROOM HAS A CHEERY HOMELIKE APPEARANCE.

Specifications for This Five-Room Ready Made Cottage 55C188

SIZE OF HOUSE (INSIDE)—27 feet wide by 21 feet deep.

PORCH—12 feet long by 6 feet deep.

LIVING ROOM—15 feet wide by 12 feet deep.

DINING ROOM—9 feet wide by 12 feet deep.

TWO BEDROOMS—9 feet wide by 9 feet deep.

KITCHEN—9 feet wide by 9 feet deep.

REAR PORCH—3 feet by 3 feet.

DOORS AND WINDOWS—Ten glazed two-light windows, glass size 24x26 inches; opening size 2 feet 4⅛ inches by 4 feet 10 inches. Two single sash windows, one each side of fireplace, opening size 2 feet wide by 2 feet 5 inches high, glazed with clear glass with square marginal lights. Two glazed doors, size 2 feet 6 inches by 6 feet 6 inches, 1⅜ inches thick, for front and rear doors. One five-panel inside door to kitchen, size 2 feet 6 inches by 6 feet 6 inches, 1⅜ inches thick. Two cased openings, 2 feet 6 inches wide by 6 feet 6 inches high, for entrances to bedrooms. One large cased opening, 7 feet 6 inches wide by 6 feet 6 inches high, between living and dining rooms.

FOUNDATION—We furnish with the house cedar foundation posts 6 inches in diameter, 2 feet 6 inches long. Brick, stone or cement not furnished.

SILLS—3x6-inch No. 1 yellow pine and rest on foundation posts.

FLOOR JOISTS—2x6-inch No. 1 yellow pine, hung in patent steel stirrups, 16 inches on center.

FLOORING—$^{13}/_{16}$ inch thick by 3¼-inch face dressed and matched No. 1 yellow pine, in sections 3 feet wide.

WALL SECTIONS—No. 1 yellow pine drop siding, ¾ inch thick, dressed smooth on the inside. Height of wall sections, 8 feet.

PARTITION WALLS—Made of No. 1 yellow pine, ⅝ inch thick, dressed and beaded, in sections 3 feet wide by 7 feet 10 inches high.

ROOFING BOARDS—Made of No. 1 yellow pine, ⅝ inch thick, dressed and beaded on the under side, in sections 3 feet wide.

WINDOW AND DOOR FRAMES—Good quality window and door frames; doors and windows are hung in their frames and fitted with hardware.

ROOFING—Sea Green Fire-Chief Shingle Roll Slate Surfaced Roofing, guaranteed to wear seventeen years without leaking or changing color.

HARDWARE—All necessary hardware is furnished with the house and is fitted in place; a galvanized steel chimney is included.

FIREPLACE—The mantel and fireplace are not included and should be set in place by your mason. The small windows at the end of the living room are far enough apart to allow for a mantel 5 feet 6 inches wide.

PAINTING—Entire house and porch painted on the outside with one coat of gray paint.

55C188—Simplex Ready Made House. Shipping weight, about 14,000 pounds.
Price..... **$943.00**

55C188E—Simplex Ready Made House, with porch 8 feet deep instead of 6 feet deep. Shipping weight, about 14,500 pounds.
Price..... **$998.00**

Peerless Wall Board (see page 53), plain brown finish, for lining and ceiling (**double wall construction**), add $181.00.
Upper partitions extending to roof, add $26.00.
Screen sections for 6-foot porch, with door, add $54.00.
Screen sections for 8-foot porch, with door, add $66.00.
Porch ceiling, add $9.50.
Half screens for windows and screen doors, add $26.00.
Shutters for windows and doors, add $43.80.
If foundation posts are not wanted, deduct $11.00.

Price of wall board includes 2x4-inch ceiling joists, panel strips, baseboard, quarter round and nails. The wall board sheets are 3 feet wide and cut in proper lengths to fit ceiling, any window, door or plain wall section. Not a piece to cut.

House shipped from factory in SOUTHERN ILLINOIS. Wall Board shipped from factory in OHIO.

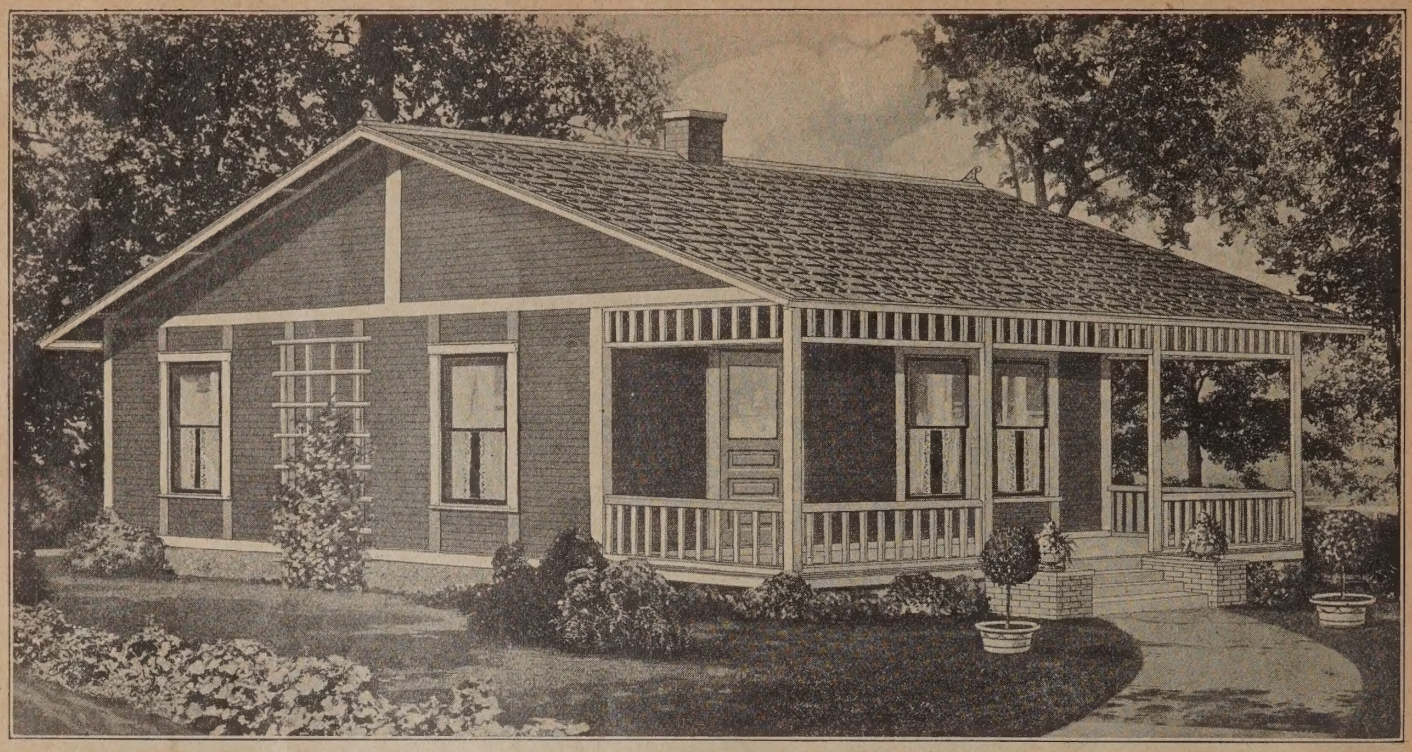

The SUNBURST

Three-Room Ready Made House With Large Porch **55C106** **Price, $776.00**

The Sunburst, with the broad sweeping lines, the full width porch covered by the extended main roof, at once impresses you with its strength and durability. The porch railing around the bottom and the spindles around the top of the porch add greatly to the appearance. It is neat, simple and arranged to give the greatest amount of floor area for the least money. The large dining room and living room are features preferred by many. If desired, a wooden partition, with door, may be placed across the middle of this room, making a four-room cottage, for only $20.00 extra.

People who own undeveloped property in villages or suburban districts often find difficulty in securing carpenters to undertake the building of small cottages except at almost prohibitive cost. Consequently their lots remain unimproved from year to year, bringing no returns on the money invested. It is in just such cases as this that a Ready Made House proves its worth. No expert carpenters are required for its erection. The purchaser can, if he chooses, put up a house himself and will find the task easy and interesting. The low prices asked for these dwelling houses place them within reach of a man of moderate means, enabling him to increase the value of his property at a small outlay.

Our Simplex Ready Made Houses are constructed along scientific lines and combine economy, durability and attractiveness. They can be used as all the year around dwellings by lining them with our Peerless Wall Board. See page 53.

Rahway, N. J., Box 20, R. R. 2.

Sears, Roebuck and Co., Chicago, Ill.

Gentlemen:—The portable house was occupied by us from May to November 9, 1910, while we were having our present residence erected. I had the assistance of two of my neighbors in putting up the portable house. Sold it last Fall to a party named Delamire, Pompton Lake, New Jersey. Send him a catalog. He was pleased with the house. I told him you had more like it. He said he would like to get hold of two or three more.

Yours respectfully,
A. NELSON POOLE.

Remember, our Simplex Houses are READY MADE—not merely ready cut. They come in sections, ready to be bolted together. No nailing necessary.

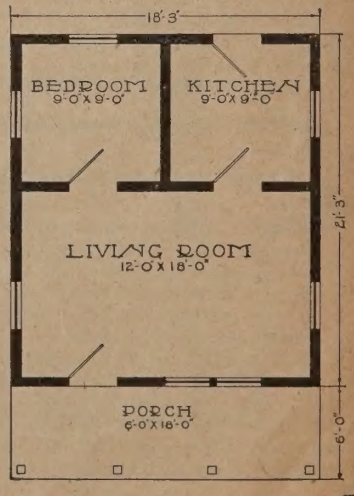

THE PORCH SCREENED IN MAKES A GOOD RESTING SPOT. CAN BE USED AS A LIVING ROOM IN THE SUMMER MONTHS.

Specifications for This Well Arranged Three-Room House With Large Porch 55C106—Suitable for All the Year Around Use

SIZE OF HOUSE (INSIDE)—18 feet wide by 21 feet deep.

PORCH—18 feet wide by 6 feet deep.

LIVING ROOM—18 feet wide by 12 feet deep.

BEDROOM—9 feet wide by 9 feet deep.

KITCHEN—9 feet wide by 9 feet deep.

WINDOWS AND DOORS—Seven glazed windows, two-light, glass size 24x26 inches; window opening size, 2 feet 4⅛ inches by 4 feet 10 inches. Two outside doors, upper half glazed with clear select glass; two inside five-cross panel doors. All No. 1 quality. Size of doors, 2 feet 6 inches wide by 6 feet 6 inches high by 1⅜ inches thick.

FOUNDATION—We furnish with the house cedar foundation posts 6 inches in diameter, 2 feet 6 inches long. Brick, stone or cement are not furnished.

SILLS—3x6-inch No. 1 yellow pine, which rest on foundation posts.

FLOOR JOISTS—2x6-inch No. 1 yellow pine, hung in patent steel stirrups 16 inches on centers.

FLOORING—13/16 inch thick by 3¼-inch face No. 1 yellow pine, dressed and matched in sections 3 feet wide.

WALL SECTIONS—Made of No. 1 yellow pine drop siding ¾ inch thick, dressed smooth on the inside. Height of wall sections, 8 feet.

ROOFING BOARDS—Made of No. 1 yellow pine, ⅝ inch thick, dressed and beaded on the under side, in sections 3 feet wide.

WINDOW AND DOOR FRAMES—Good quality yellow pine window and door frames; doors and windows hung in their frames and fitted with hardware.

PARTITION WALLS—Made of No. 1 yellow pine, ⅝ inch thick, dressed and beaded, in sections 3 feet wide by 7 feet 10 inches high.

ROOFING—Sea Green Fire-Chief Shingle Roll Slate Surfaced Roofing, guaranteed to wear and hold its color seventeen years.

HARDWARE—All necessary hardware furnished and fitted in place; a galvanized steel chimney included.

PAINTING—Entire outside of house, including porch floor, is painted one coat of gray paint.

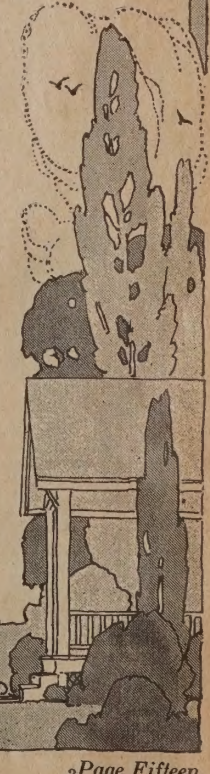

55C106—Simplex Ready Made House. Shipping weight, about 10,000 pounds.
Price **$776.00**

55C106E—Simplex Ready Made House, with porch 8 feet deep instead of 6 feet deep. Shipping weight, about 10,200 pounds.
Price **$820.00**

Peerless Wall Board (see page 53), plain brown finish, for lining and ceiling (**double wall construction**), add $125.00.

Upper partitions extending to roof, add $26.00.

Screen sections for 6-foot porch, with door, add $72.00.

Screen sections for 8-foot porch, with door, add $80.00.

If foundation posts are not wanted, deduct $10.00.

Porch ceiling is furnished without extra charge.

Half screens for windows and screen doors, add $18.75.

Shutters for windows and doors, add $28.80.

Price of wall board includes 2x4-inch ceiling joists, panel strips, baseboard, quarter round and nails. The wall board sheets are 3 feet wide and cut in proper lengths to fit ceiling, any window, door or plain wall section. Not a piece to cut.

House shipped from factory in SOUTHERN ILLINOIS. Wall board shipped from factory in OHIO.

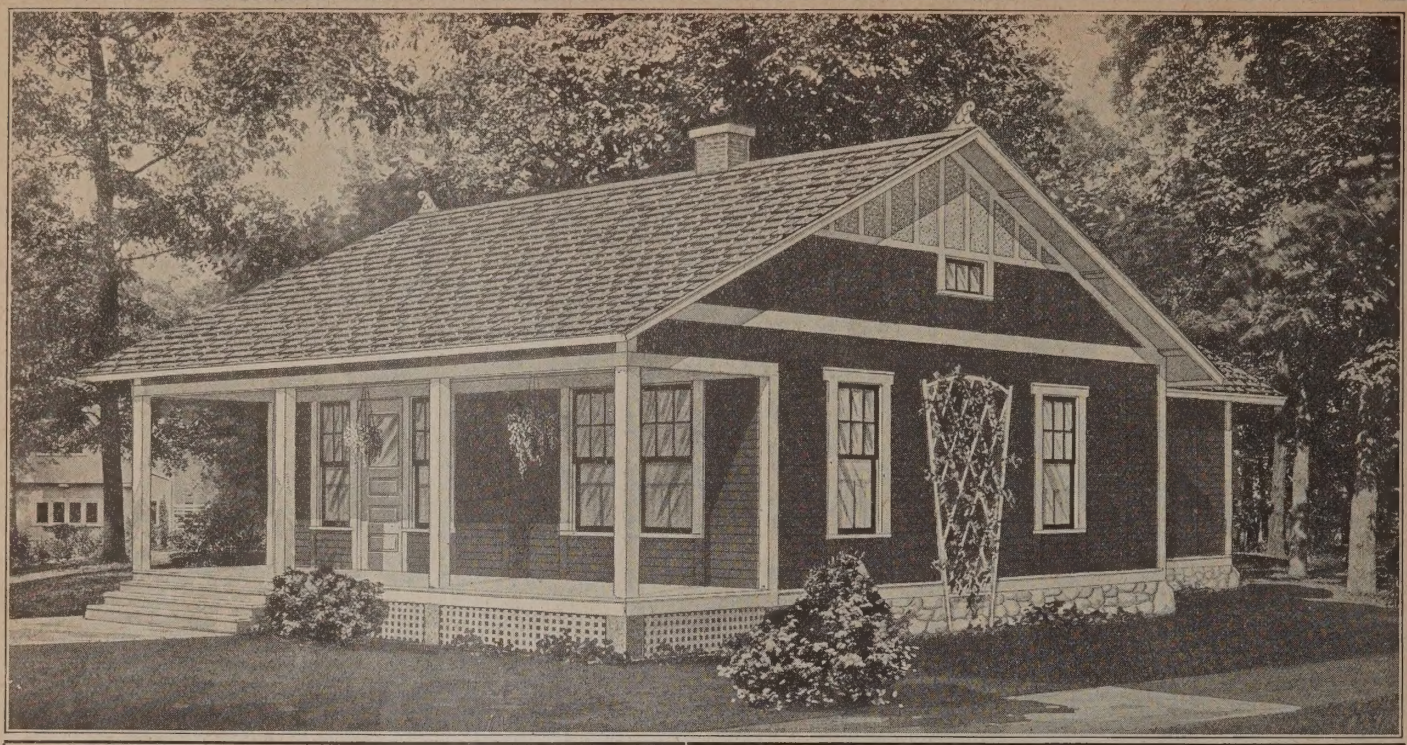

The ORIOLE

Four-Room Ready Made House With Bathroom and Large Porch. 55C132 Price, $1,279.00

The Oriole is a handsome four-room dwelling, arranged for all the year around use. It has a good size living room, well lighted by four windows and a glazed door. Conveniently located within easy reach of the living room are two bedrooms, each provided with a separate clothes closet. The kitchen is of large size, so that it may be used for a dining room also. The two roomy closets afford plenty of space for clothes and trunks. The pantry, big enough to allow for an ice box, and a good size bathroom in which a complete outfit of fixtures can be installed without crowding, are two more very desirable features.

This cottage can be made into an ideal Summer home by screening the large porch. The additional cost for this is only $91.00 for 55C132 or 55C132B, including screen frames covered with wire screen ready to fit into place and a screen entrance door complete with hinges, latch and spring.

When the house is used as an all the year around dwelling, the walls should be covered with our Peerless Wall Board, as this retains the heat in the Winter and excludes it in the Summer quite as effectively as lath and plaster.

Specifications for Four-Room Ready Made House 55C132

SIZE OF HOUSE (INSIDE)—27 feet wide by 24 feet deep.
PORCH—27 feet wide by 6 feet deep.
LIVING ROOM—15 feet wide by 12 feet deep.
BEDROOMS—Two bedrooms 9 feet wide by 12 feet deep.
BATHROOM—6 feet wide by 9 feet deep.
CLOSETS—Two closets 6 ft. wide by 3 ft. deep. Pantry, 6 ft. deep and 3 ft. wide.
KITCHEN—12 feet wide by 12 feet deep.
WINDOWS AND DOORS—Thirteen two-light windows, glazed; glass size, 24x26 inches, upper sash divided lights; window opening size, 2 feet 4⅛ inches by 4 feet 10 inches. Two outside doors with upper half glazed. Seven inside five-cross panel doors. Size of doors, 2 feet 6 inches wide by 6 feet 6 inches high by 1⅜ inches thick. All No. 1 quality. Gable sash, three lights wide, each light, 10x12 inches.
FOUNDATION—We furnish with the house cedar foundation posts 6 inches in diameter, 2 feet 6 inches long. Brick, stone or cement are not furnished.
SILLS—3x6-inch No. 1 yellow pine.
FLOOR JOISTS—2x6-inch No. 1 yellow pine, hung in patent steel stirrups. 16 inches on centers.
FLOORING—No. 1 yellow pine dressed and matched flooring 13/16 inch thick by 3¼-inch face, in sections 3 feet wide.
WALL SECTIONS—No. 1 yellow pine drop siding ¾ inch thick, dressed smooth on the inside. Height of wall sections, 8 feet.
ROOFING BOARDS—Made in sections of No. 1 yellow pine ⅝ inch thick, dressed and beaded on the under side.
WINDOW AND DOOR FRAMES—Good quality window and door frames. Windows and doors are hung in their frames and fitted with hardware.
PARTITION WALLS—Made of No. 1 yellow pine, ⅝-inch thick, dressed and beaded, in sections 3 feet wide by 7 feet. 10 inches high.
ROOFING—Sea Green Fire-Chief Shingle Roll Slate Surfaced Roofing, guaranteed to wear and retain its color seventeen years.
HARDWARE—All necessary hardware is fitted in place; a galvanized steel chimney is included.
PAINTING—Entire house and porch painted on the outside with one coat of gray paint.

55C132—Simplex Ready Made House. Shpg. wt., abt. 16,200 lbs. Price.**$1,279.00**
55C132B—Simplex Ready Made House, with detachable kitchen as shown by dotted lines, two windows and rear door. Shipping weight, about 21,700 lbs. Price....**$1,550.00**
Peerless Wall Board (see page 53), plain brown finish; for lining and ceiling (**double wall construction**), 55C132, add $254.00; 55C132B, add $288.00.
Upper partitions extending to roof, add $97.00.
Screen sections for porch with door, add $91.00.
If foundation posts are not wanted, deduct $17.00.
Porch ceiling is furnished without extra charge.
Half screens for windows and screen doors, 55C132, add $27.45; 55C132B, add $30.35.
Shutters for windows and doors, 55C132, add $46.80; 55C132B, add $52.80.
Price of Peerless Wall Board includes 2x4-inch ceiling joists, panel strips, baseboard quarter round and nails. The wall board sheets are 3 feet wide and cut in proper lengths to fit ceiling, any window, door or plain wall section. Not a piece to cut.
House shipped from factory in SOUTHERN ILLINOIS. Wall Board shipped from factory in OHIO.

THE ORIOLE Simplex House is READY MADE—not merely ready cut. It comes in sections ready to be bolted together. No nailing necessary.

Williamsburg, Penn.

Sears, Roebuck and Co., Chicago, Ill.

Gentlemen:—I had the portable house shipped to Florida and after putting it up had it lined and made a permanent house of it and have made my Winter home in it for the past three seasons.

Very truly yours,
A. J. PATTERSON.

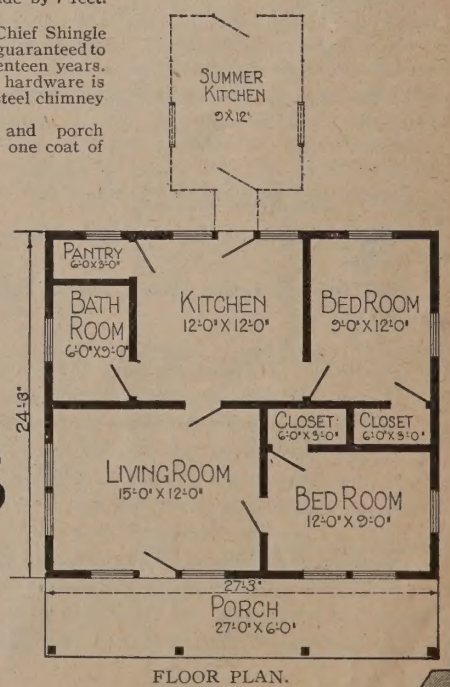

FLOOR PLAN.

The BOWER

Five-Room Ready Made House With Large Porch. 55C189 Price, $1,479.00

The Bower is built on the square plan. For economy, attractive and convenient arrangement of rooms the square type affords less waste space than any other design. This is only one of the many good features in favor of this attractive bungalow. There is a large front porch extending the entire width of the house, supported with large Colonial columns. Then see how the dormer puts artistic taste into the Bower. You will like the arrangement of this house. The rooms are all well lighted and ventilated. You can see when you enter through the front door the interior is practical and home-like. Not a single thing has been forgotten. The bedrooms are provided with clothes closets. The Bower Simplex Ready Made House can be made a cozy and comfortable home the year around by lining it with our Peerless Wall Board.

Specifications for Ready Made Suburban Home 55C189, Constructed of High Grade Materials.

SIZE OF HOUSE (INSIDE)—24 feet wide by 30 feet deep.
PORCH—Front porch, 24 feet wide by 6 feet deep.
LIVING ROOM—15 feet wide by 12 feet deep.
DINING ROOM—15 feet wide by 11 feet deep.
BEDROOMS—Front bedroom, 9 feet wide by 12 feet deep, with closet 4 feet wide and 2 feet deep; back bedroom, 9 feet wide by 12 feet deep, with closet 4 feet wide and 2 feet deep.
BATHROOM—6 feet by 9 feet.
KITCHEN—13 feet wide by 7 feet deep, with pantry 2 feet by 3 feet. The pantry and all closets are furnished with one 12-inch shelf.
WINDOWS AND DOORS—Eleven two-light windows glazed, glass size 24x26 inches; window opening, size 2 feet 4⅛ inches by 4 feet 10 inches. Front windows have upper sash divided. The bathroom has one 24x26-inch, one-light sash. Two outside doors, upper half glazed with clear select glass; eight inside doors, five-cross panel 1⅜ inches thick. All inside and outside doors are 2 feet 6 inches wide by 6 feet 6 inches high.
GABLE SASH—Three lights wide, each light, 10x12 inches.
FOUNDATION—We furnish with the house cedar foundation posts 6 inches in diameter, 2 feet 6 inches long. Brick, stone or cement are not furnished.
SILLS—3x6-inch No. 1 yellow pine, which rest on foundation posts.
FLOOR JOISTS—2x6-inch No. 1 yellow pine, hung in patent steel stirrups, 16 inches center to center.
FLOORING—13/16 inch thick by 3¼-inch face dressed and matched No. 1 yellow pine.
WALL SECTIONS—Made of No. 1 yellow pine drop siding, ¾ inch thick, dressed smooth on the inside. Height of wall sections, 8 feet.
PARTITION WALLS—Made of No. 1 yellow pine, ⅝ inch thick, dressed and beaded, in sections 3 feet wide by 7 feet 10 inches high.
WINDOW AND DOOR FRAMES—Good quality window and door frames; doors and windows are hung in their frames and fitted with hardware.
ROOFING BOARDS—Made of No. 1 yellow pine, ⅝ inch thick, dressed and beaded on the under side. In sections 3 feet wide.
ROOFING—Sea Green Fire-Chief Shingle Roll Roofing, guaranteed to wear seventeen years without even changing color.
HARDWARE—All necessary hardware fitted in place and furnished with house; a galvanized steel chimney is included.
PAINTING—Entire outside, including porch floors is painted one coat of gray paint.

55C189—Simplex Ready Made House. Shipping weight, about 18,000 pounds.
Price..... **$1,479.00**

Peerless Wall Board (see page 53), plain brown finish, for lining and ceiling (**double wall construction**), add $258.00.
Upper partitions extending to roof, add $35.00.
Screen sections for front porch, with door, add $86.00.
If foundation posts are not wanted, deduct $14.00.
Half screens for windows and screen doors, add $26.00.
Shutters for windows and doors, add $43.80.
Porch ceiling is furnished without extra charge.

Price of Peerless Wall Board includes 2x4-inch ceiling joists, panel strips, baseboard quarter round and nails. The wall board sheets are 3 feet wide and cut in proper lengths to fit ceiling, any window, door or plain wall section. Not a piece to cut.

House shipped from factory in SOUTHERN ILLINOIS. Wall Board shipped from factory in OHIO.

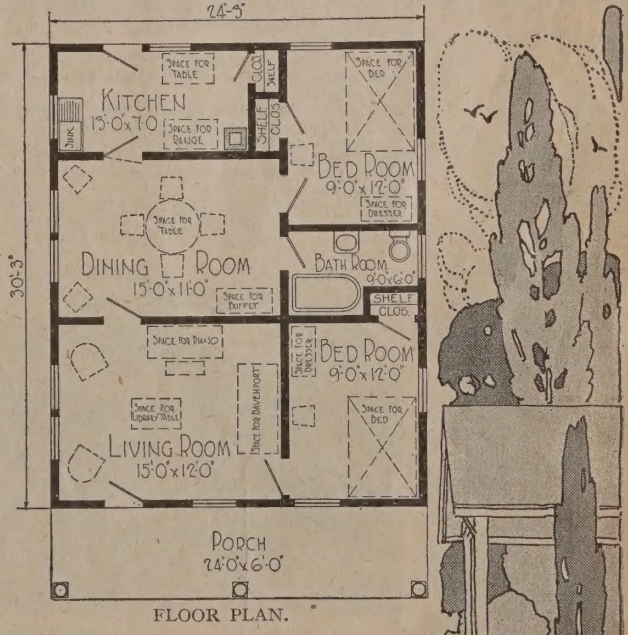

FLOOR PLAN.

North Bessemer, Penn.

Sears, Roebuck and Co., Chicago, Ill.

Gentlemen:—Your new Portable House Catalog would interest us. Had we room for another house we should only be too glad to place an order with you for a house.

We bought a portable house from you last April, set it up in eight hours and people moved into it May 1st.

The house has never been vacant. It will pay for itself in two years.

Yours very truly,
JONES BROS.

THE BOWER Simplex House is READY MADE—not merely ready cut. It comes in sections, ready to be bolted together. No nailing necessary.

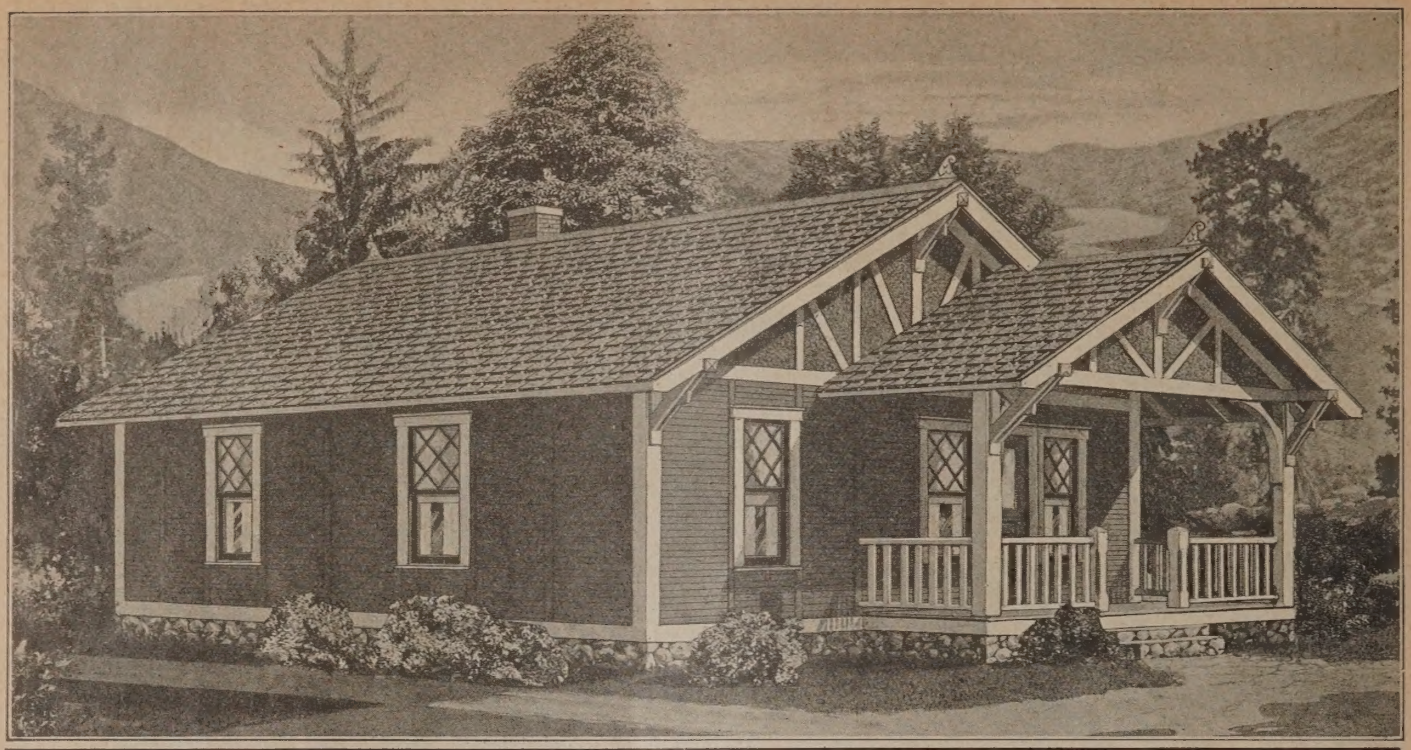

The CLOVER

Four-Room Ready Made House With Porch 55C190 Price, $1,109.00

Isn't the Clover a beauty with its wide overhanging eaves and artistic paneled gables? Covered with gray Oriental Slate Surfaced Roofing which has a close resemblance to stucco. Can't you imagine the Clover on the shore of a beautiful lake with the water stretching out before it? Notice the floor plan. There is a living room, kitchen, two bedrooms and a front porch, which is made very attractive by the brackets and porch railing. Just the right size Summer cottage for the average family. The Clover is a typical design of Simplex Ready Made construction and quality. Erect your own Summer cottage. The sections are shipped to you plainly numbered. All you have to do is to assemble them according to the simple instructions and plans which we furnish.

Specifications for Four-Room Ready Made Bungalow 55C190

SIZE OF HOUSE (INSIDE)—24 feet wide by 24 feet deep.
LIVING AND DINING ROOM—15 feet wide by 15 feet deep.
FRONT BEDROOM—9 feet wide by 13 feet deep.
REAR BEDROOM—9 feet wide by 12 feet deep.
KITCHEN—9 feet wide by 12 feet deep.
CLOSETS—Two closets 4 feet 6 inches long and 2 feet deep.
PORCH—15 feet wide by 6 feet deep.
WINDOWS AND DOORS—Eight glazed Queen Anne style windows, glass size, 24x26 inches; opening size 2 feet 4½ inches by 4 feet 10 inches. Front door, size 2 feet 6 inches by 6 feet 6 inches, 1⅜ inches thick, glazed diamond lights. One rear door, size 2 feet 6 inches by 6 feet 6 inches, 1⅜ inches thick, glazed plain double strength glass. Five five-cross panel inside doors, size 2 feet 6 inches by 6 feet 6 inches, 1⅜ inches thick. All No. 1 quality.
FOUNDATION—We furnish with the house cedar foundation posts 6 inches in diameter, 2 feet 6 inches long. Brick, stone or cement are not furnished.
SILLS—3x6-in. No. 1 yellow pine which rest on foundation posts.
FLOOR JOISTS—2x6-inch No. 1 yellow pine, hung in patent steel stirrups 16 inches on centers.
FLOORING—13/16 in. thick by 3¼-in. face dressed and matched No. 1 yellow pine.
WALL SECTIONS—No. 1 yellow pine drop siding, ¾ inch thick, dressed smooth on the inside. Height of wall sections, 8 feet.
PARTITION WALLS—Made of No. 1 yellow pine, ⅝ inch thick, dressed and beaded, in sections 3 feet wide by 7 feet 10 inches high.
ROOFING BOARDS—Made of No. 1 yellow pine, ⅝ inch thick, dressed and beaded on the under side. In sections 3 feet wide.
WINDOW AND DOOR FRAMES—Good quality window and door frames; doors and windows are hung in their frames and fitted with hardware.
ROOFING—Sea Green Fire-Chief Shingle Roll Slate Surfaced Roofing, guaranteed to wear seventeen years without leaking or changing color. Gable ends covered with Oriental Greenish Gray Slate Surfaced Roofing.
HARDWARE—All necessary hardware is furnished with house and is fitted in place; a galvanized steel chimney is included.
PAINTING—Entire house and porch painted on the outside with one coat of gray paint.

55C190—Simplex Ready Made House. Shipping weight, about 13,800 pounds. Price..... **$1,109.00**

55C190E—Simplex Ready Made House, with porch 8 feet deep instead of 6 feet deep. Shpg. wt., about 14,100 lbs. Price.. **$1,152.00**

Peerless Wall Board (see page 53), plain brown finish, for lining and ceiling **(double wall construction)**, add $189.00.
Upper partitions extending to roof, add $31.00.
Screen sections for 6-foot porch, with door, add $63.00.
Screen sections for 8-foot porch, with door, add $73.00.
Half screens for windows and screen doors, add $20.20.
Shutters for windows and doors, add $31.80.
Porch ceiling, add $12.00.
If foundation posts are not wanted, deduct $10.00.

Price of wall board includes 2x4-inch ceiling joists, panel strips, baseboard, quarter round and nails. The wall board sheets are 3 feet wide and cut in proper lengths to fit ceiling, any window, door or plain wall section. Not a piece to cut.

House shipped from factory in SOUTHERN ILLINOIS. Wall board shipped from factory in OHIO.

The Clover was built at Iowa City, Iowa (see picture below), by Walter J. Coppock. He says:

Gentlemen:—We have now lived in our home (your 55C190) for more than a year and are thoroughly satisfied with it. Last Winter was very cold and stormy, with thermometer indicating at times as low as 28 degrees below zero, but we burned less than $30.00 worth of coal. I paid out less than $20.00 for work on my house, and except that for a day and a half's work for two of us I built and finished it myself.

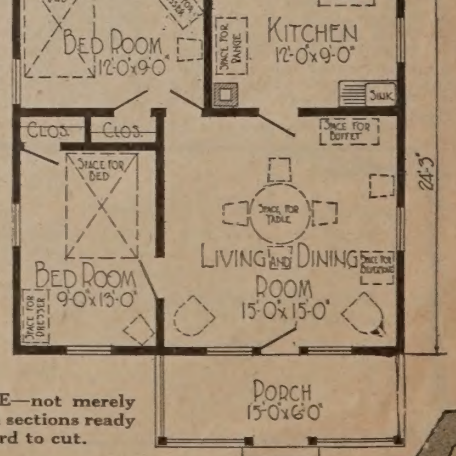

THE CLOVER Simplex Bungalow is READY MADE—not merely ready cut. The floors, walls, roof and partitions come in sections ready to be bolted together. No nailing necessary—not a board to cut.

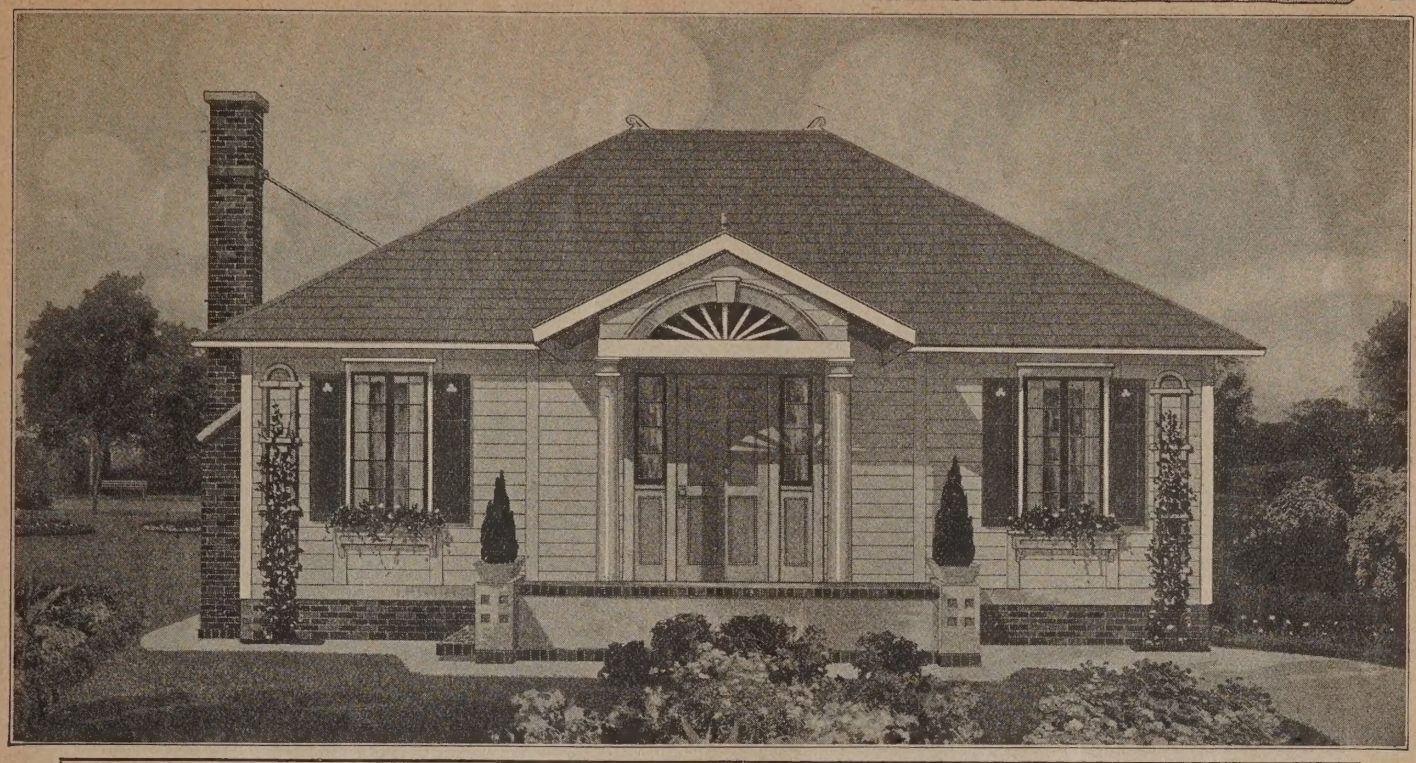

The MT. VERNON

Four-Room Ready Made House With Bathroom 55C191 Price, $1,319.00

This beautiful Colonial home is particularly convenient, and presents a pleasing exterior appearance. The large living room is entered through the inviting Colonial entrance. You will notice that the bedrooms are of convenient size and provided with clothes closets. The bathroom is entered from the hall and is easily accessible from any part of the house. The large kitchen and pantry are big features when you consider buying a home. You will find the breakfast alcove convenient and admired by all.

Specifications for Ready Made Colonial Home 55C191, Constructed of High Grade Materials

SIZE OF HOUSE (INSIDE)—30 feet wide by 24 feet deep.

LIVING ROOM—18 feet wide by 13 feet deep. There is a closet that can be entered from the living room, 2 feet wide by 3 feet deep, with five shelves 12 inches wide.

FRONT BEDROOM—12 feet wide by 11 feet deep.

REAR BEDROOM—10 feet wide by 11 feet deep. Each bedroom has a clothes closet, 4 feet 6 inches wide by 2 feet deep, equipped with five 12-inch shelves.

BATHROOM—6 feet wide by 7 feet 6 inches deep.

HALL—6 feet wide by 3 feet 6 inches deep, between bathroom and living room.

KITCHEN—9 feet wide by 11 feet deep.

PANTRY—5 feet wide by 5 feet deep, equipped with five shelves, 12 inches wide.

BREAKFAST ALCOVE—5 feet wide by 6 feet deep. The fixtures for the alcove are not included in the price of the house.

WINDOWS AND DOORS—Nine pairs of French windows, glazed; window opening size 2 feet 4⅛ inches by 4 feet 10 inches. Two French windows, glazed; window opening size 2 feet 4⅛ inches by 3 feet 4 inches. These windows are made of white pine, 1⅜ inches thick, and have divided lights, as illustrated. The French windows can be rabbeted and hinged to swing either in or out without extra charge. Colonial front entrance door, 3 feet by 6 feet 8 inches high. Side lights, 1 foot ⅝ inch wide by 6 feet 8 inches high. Rear entrance door, 2 feet 6 inches by 6 feet 6 inches, 1⅜ inches thick, upper half glazed. Seven inside doors, five-cross panel, 2 feet 6 inches wide by 6 feet 6 inches high; 1⅜ inches thick. Cased opening entering hall, 2 feet 6 inches by 6 feet 6 inches. Cased opening entering closet from living room, 1 foot 6 inches by 6 feet 6 inches.

PRICE INCLUDES—Colonial flower boxes under front windows, shutters for front windows and trellis, as illustrated.

FOUNDATION—We furnish with the house cedar foundation posts 6 inches in diameter, 2 feet 6 inches long. Brick, stone or cement are not furnished.

SILLS—3x6-inch No. 1 yellow pine.

FLOOR JOISTS—2x6-inch No. 1 yellow pine, hung in patent steel stirrups. 16 inches on centers.

FLOORING—No. 1 yellow pine dressed and matched flooring 13/16 inch thick by 3¼-inch face, in sections 3 feet wide.

WALL SECTIONS—No. 1 yellow pine drop siding ¾ inch thick, dressed smooth on the inside. Height of wall sections, 8 feet.

ROOFING BOARDS—Made in sections of No. 1 yellow pine ⅝ inch thick, dressed and beaded on the under side.

WINDOW AND DOOR FRAMES—Good quality window and door frames. Windows and doors are hung in their frames and fitted with hardware.

PARTITION WALLS—The partition walls are made of No. 1 yellow pine, ⅝ inch thick, dressed and beaded and are 7 feet 10 inches high.

ROOFING—Sea Green Fire-Chief Shingle Roll Slate Surfaced Roofing, guaranteed to wear and retain its color seventeen years.

HARDWARE—All necessary hardware is fitted in place; a galvanized steel chimney is included.

PAINTING—Entire house painted on the outside with one coat of gray paint.

55C191—Simplex Ready Made House. Shipping weight, about 21,000 pounds.
Price.....**$1,319.00**

Peerless Wall Board (see page 53), plain brown finish, for lining and ceiling (DOUBLE WALL CONSTRUCTION), add $235.00. If foundation posts are not wanted, deduct $13.00.

Shutters for nine windows and two doors, like shown on the house, add $70.00.

Full length screens for all windows, also exterior door screens, add $37.50.

Price of Peerless Wall Board includes 2x4-inch ceiling joists, panel strips, baseboard quarter round and nails. The wall board sheets are 3 feet wide and cut in proper lengths to fit ceiling, any window, door or plain wall section. Not a piece to cut.

House shipped from factory in SOUTHERN ILLINOIS. Wall Board shipped from factory in OHIO.

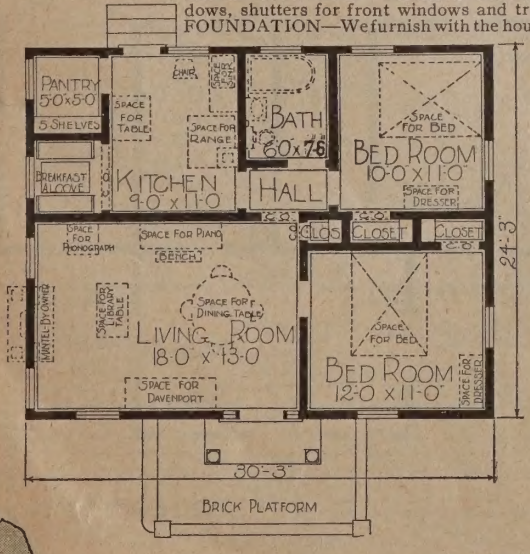

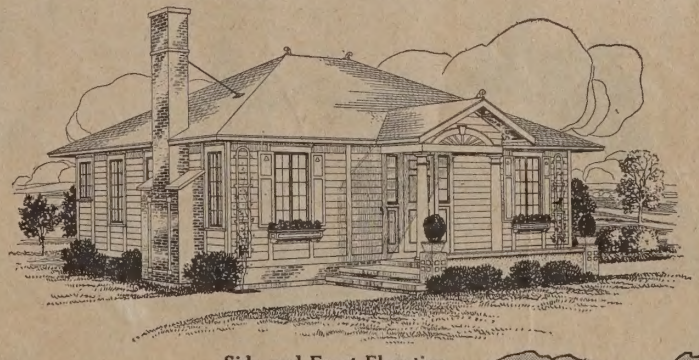

Side and Front Elevation of the Mt. Vernon.

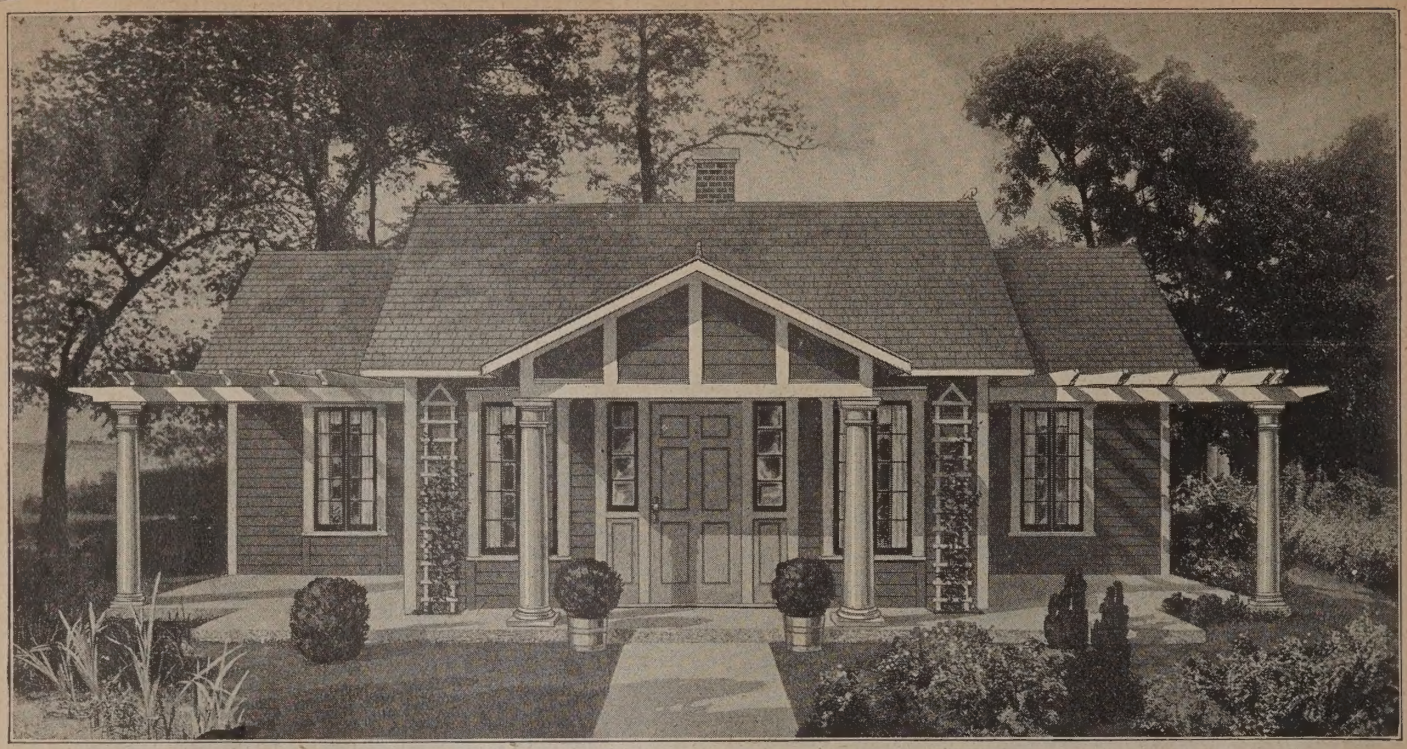

The ADIRONDACKS

Three-Room Ready Made House With Bathroom and Garage Attached 55C192 Price, $1,439.00

The Adirondacks will appeal to those who prefer the distinct bungalow type. As you enter the spacious living room through the artistic front entrance, you cannot help but admire the French doors at either side which open on the pergola. The bathroom, bedroom and kitchen are well proportioned. Think of the convenience and satisfaction of having the garage connected with the house. The artistic exterior appearance of this bungalow will be appreciated by all.

Specifications for Three-Room Bungalow With Bathroom and Garage 55C192

SIZE OF HOUSE (INSIDE)—36 feet wide by 27 feet deep.
LIVING ROOM—18 feet wide by 12 feet deep.
BEDROOM—12 feet wide by 15 feet deep.
BATHROOM—6 feet wide by 9 feet deep.
CLOSET—3 feet wide by 6 feet deep, with five shelves 12 inches wide.
KITCHEN—9 feet wide by 15 feet deep.
GARAGE—9 feet wide by 15 feet deep, with wood floor. If you wish to use the garage as a bedroom, simply notify us when you order and we will furnish a door connecting this room with the kitchen and plain wall sections in place of the double garage doors. These will be furnished without extra charge.
PORCH—10 feet wide by 5 feet deep. The concrete terrace on three sides of the living room is not included in the price, but is to be furnished by the owner.
WINDOWS AND DOORS—Nine pairs of French windows, glazed; window opening size, 2 feet 4⅛ inches by 4 feet 10 inches. These windows are made of white pine, 1⅜ inches thick, and have divided lights, as illustrated. The French windows can be rabbeted and hinged to swing either in or out, without extra charge. Colonial front entrance door, 3 feet wide by 6 feet 8 inches high. Side lights, 1 foot ⅝ inch wide by 6 feet 8 inches high. Rear entrance door, 2 feet 6 inches by 6 feet 6 inches; 1⅜ inches thick; upper half glazed. Five inside doors, five-cross panel, 2 feet 6 inches wide by 6 feet 6 inches high; 1⅜ inches thick. Two pairs of French doors; opening size, 4 feet by 6 feet 6 inches; 1⅜ inches thick; white pine; glazed and divided into small lights, as illustrated.
PRICE INCLUDES—Pergola, each side of living room and trellises, as illustrated.
FOUNDATION—We furnish with the house cedar foundation posts 6 inches in diameter, 2 feet 6 inches long. Brick, stone or cement are not furnished.
SILLS—3x6-inch No. 1 yellow pine, which rest on foundation posts.
FLOOR JOISTS—2x6-inch No. 1 yellow pine, hung in patent steel stirrups, 16 inches center to center.
FLOORING—13/16-inch thick by 3¼-inch face dressed and matched No. 1 yellow pine.
WALL SECTIONS—Made of No. 1 yellow pine drop siding, ¾ inch thick, dressed smooth on the inside. Height of wall sections, 8 feet.
ROOFING BOARDS—No. 1 yellow pine, dressed and beaded on the under side.
WINDOW AND DOOR FRAMES—Good quality window and door frames; doors and windows are hung in their frames and fitted with hardware.
PARTITION WALLS—Partition walls 7 feet 10 inches high, ⅝ inch thick, made of No. 1 beaded yellow pine, dressed and matched.
ROOFING—Sea Green Fire-Chief Shingle Roll Roofing, guaranteed to wear seventeen years without even changing color.
HARDWARE—All necessary hardware fitted in place and furnished with house; a galvanized steel chimney is included.
PAINTING—Entire outside, including porch, is painted one coat of gray paint.

55C192—Simplex Ready Made House. Shipping weight, about 23,000 pounds. Price.....**$1,439.00**

Peerless Wall Board (see page 53), plain brown finish, for lining and ceiling (DOUBLE WALL CONSTRUCTION), add $243.00.

If foundation posts are not wanted, deduct $14.50.

Shutters for all windows and doors, add $86.00.

Full length screens for all windows, also exterior door screens, add $44.10.

Price of Peerless Wall Board includes 2x4-inch ceiling joists, panel strips, baseboard quarter round and nails. The wall board sheets are 3 feet wide and cut in proper lengths to fit ceiling, any window, door or plain wall section. Not a piece to cut.

House shipped from factory in SOUTHERN ILLINOIS. Wall Board shipped from factory in OHIO.

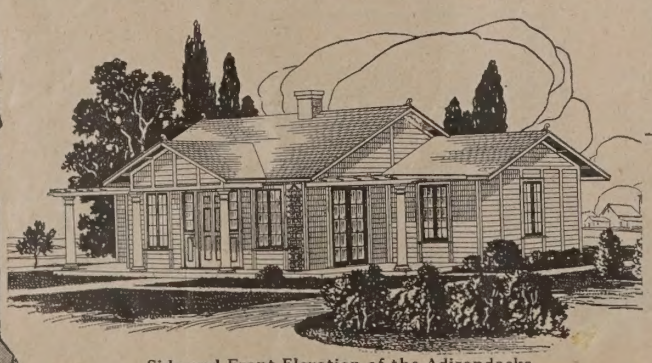

Side and Front Elevation of the Adirondacks.

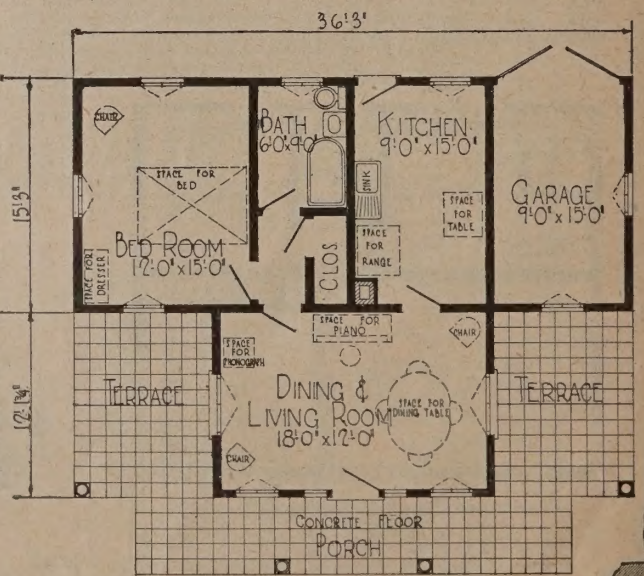

FLOOR PLAN.

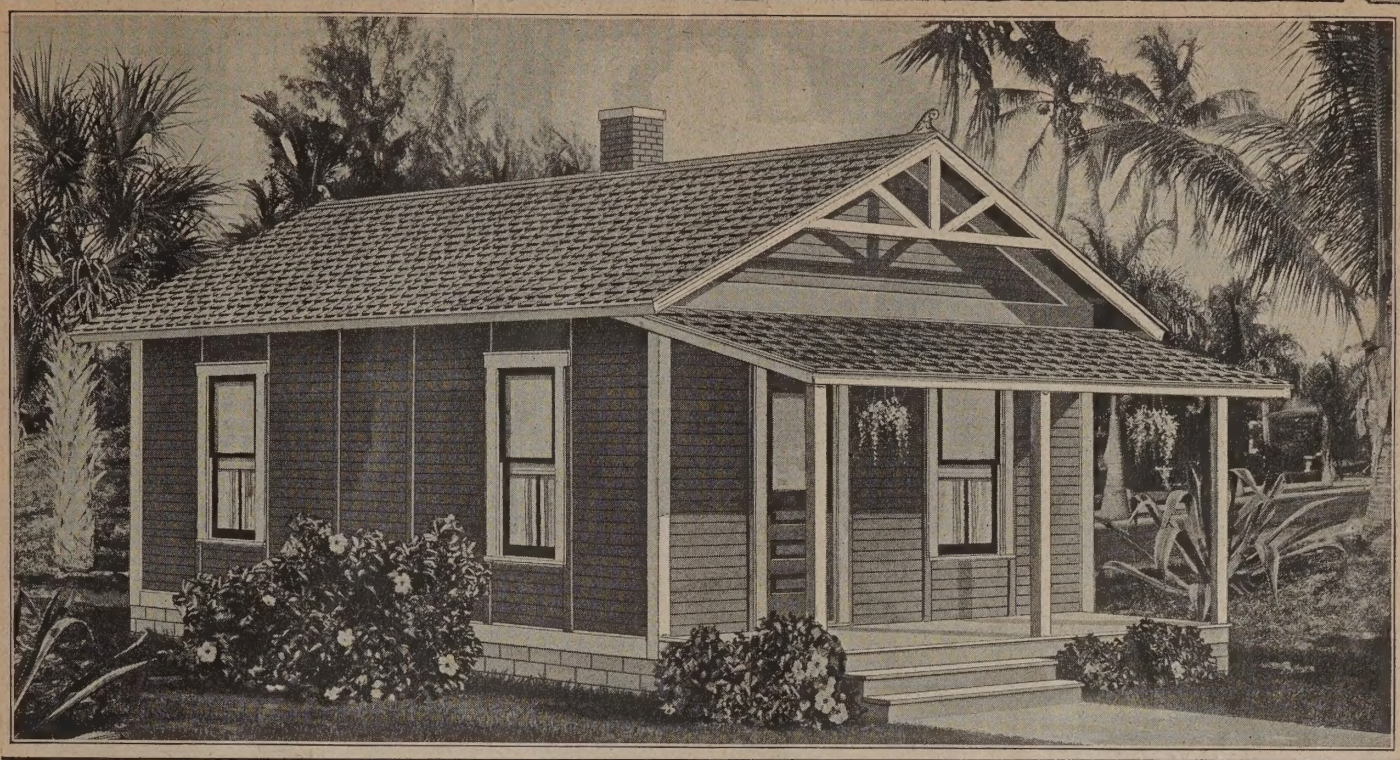

The GOLDENROD

Three-Room Ready Made House With Porch. 55C122 Price, $592.00

The Goldenrod is one of our most popular cottages. It will make a delightful Summer cottage for a small family. This design house is also preferred for use in coal mining districts and industrial centers in general. Turn to pages 26 to 28 and you will see how quick and easy it is to erect a Simplex Ready Made Building like the Goldenrod. Simplex houses are carefully made, their quality is guaranteed and always an exceptional value for the money.

Specifications for Three-Room Ready Made Cottage 55C122

SIZE OF HOUSE (INSIDE)—15 feet wide by 21 feet deep.
PORCH—15 feet wide by 5 feet deep.
LIVING ROOM—15 feet wide by 9 feet deep.
BEDROOM—7 feet 6 inches wide by 12 feet deep.
KITCHEN—7 feet 6 inches wide by 12 feet deep.
DOORS AND WINDOWS—Six glazed two-light windows, glass size 24x26 inches; opening size, 2 feet 4⅛ inches by 4 feet 10 inches. Two glazed doors, 2 feet 6 inches by 6 feet 6 inches, 1⅜ inches thick, for front and rear doors. Two inside five-cross panel doors, size 2 feet 6 in. by 6 feet 6 inches, 1⅜ in. thick. All No. 1 quality.
FOUNDATION—We furnish with the house cedar foundation posts 6 inches in diameter, 2 feet 6 inches long. Brick, stone or cement are not furnished.
SILLS—3x6-inch No. 1 yellow pine and rest on foundation posts.
FLOOR JOISTS—2x6-inch No. 1 yellow pine, hung in patent steel stirrups, 16 inches on centers.
FLOORING—$^{13}/_{16}$x3¼-inch No. 1 yellow pine, dressed and matched, in sections 3 feet wide.
WALL SECTIONS—No. 1 yellow pine drop siding, ¾ inch thick, dressed smooth on inside. Height of wall sections, 8 feet.
PARTITION WALLS—Made of No. 1 yellow pine, $^{5}/_{8}$ inch thick, dressed and beaded, in sections 3 feet wide by 7 feet 10 inches high.
ROOFING BOARDS—Made of No. 1 yellow pine, $^{5}/_{8}$ inch thick, dressed and beaded on the under side, in sections 3 feet wide.
WINDOW AND DOOR FRAMES—Good grade of window and door frames; doors and windows are fitted and hung.
ROOFING—Sea Green Fire-Chief Shingle Roll Roofing, guaranteed for seventeen years.
HARDWARE—All necessary hardware furnished with house and is fitted in place; a galvanized steel chimney is included.
PAINT—Entire house and porch painted on the outside with one coat of gray paint.

55C122—Simplex Ready Made House. Shipping weight, about 7,800 pounds.
Price.....**$592.00**

55C122E—Simplex Ready Made House, with porch 8 feet deep instead of 5 feet deep. Shipping weight, about 8,200 pounds.
Price.....**$612.00**

Peerless Wall Board (see page 53), plain brown finish, for lining and ceiling (**double wall construction**), add $121.00.
Upper partitions extending to roof, add $13.00.
Screen sections for 5-foot porch, with door, add $60.00.
Screen sections for 8-foot porch, with door, add $73.00.
If foundation posts are not wanted, deduct $8.00.
Half Screens for windows and Screen Doors, add $17.30.
Shutters for windows and doors, add $25.80.

Price of wall board includes 2x4-inch ceiling joists, panel strips, baseboard, quarter round and nails. The wall board sheets are 3 feet wide and cut in proper lengths to fit ceiling, any window, door or plain wall section. Not a piece to cut.

House shipped from factory in SOUTHERN ILLINOIS. Wall board shipped from factory in OHIO.

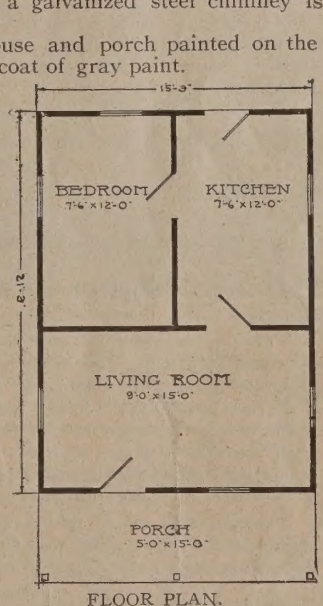

FLOOR PLAN.

No. 8 Lincoln Avenue, Salem, Ohio.
Sears, Roebuck and Co., Chicago, Ill.

Gentlemen:—I am very much pleased with my cottage I bought of you. I put it up in one day on receipt of same. It has never been down and is standing nicely and only on field stone, no prepared foundation.

Very truly yours,
DR. W. D. SIGLER.

Remember, our Simplex Houses are READY MADE—not merely ready cut. They come in sections, ready to be bolted together. No nailing necessary.

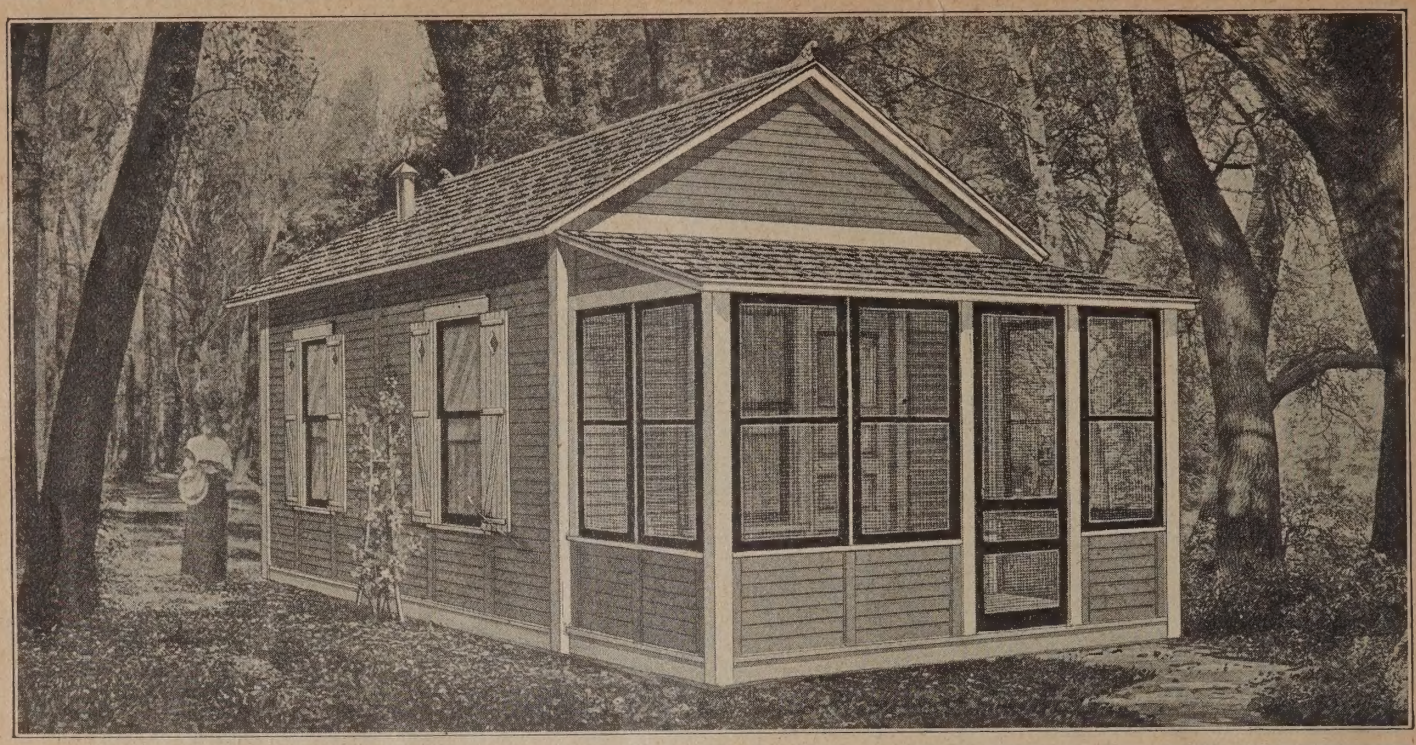

The DELLS

Two-Room Ready Made House With Porch **55C121 Price.** **$461.00**

The Dells, with a screened porch, a living room and kitchen, is a very desirable investment. The shutters add to the appearance and insure privacy. You will like the Dells. With the porch screened you will have additional and comfortable sleeping quarters. Yourself and friend can erect this Simplex House, ready for occupancy, in less than a day.

Specifications for Simplex Ready Made House 55C121

SIZE OF HOUSE (INSIDE)—12 feet wide by 18 feet deep.
FRONT ROOM—12 feet wide by 9 feet deep.
BACK ROOM—12 feet wide by 9 feet deep.
PORCH—12 feet wide by 5 feet deep.
DOORS AND WINDOWS—Six glazed two-light windows, glass size 24x26 inches, opening size 2 feet 4⅛ inches by 4 feet 10 inches. One five-cross panel well made rear door, 2 feet 6 inches by 6 feet 6 inches, 1⅜ inches thick. One five-cross panel yellow pine inside door, size 2 feet 6 inches by 6 feet 6 inches, 1⅜ in. thick. One glazed front door, 2 feet 6 inches by 6 feet 6 inches, 1⅜ inches thick.
FOUNDATION—We furnish with the house cedar foundation posts 6 inches in diameter, 2 feet 6 inches long. Brick, stone or cement are not furnished.
SILLS—3x6-inch No. 1 yellow pine and rest on foundation posts.
JOISTS—2x6-inch No. 1 yellow pine, hung in steel stirrups.
FLOORING—13/16 inch thick by 3¼-inch face No. 1 yellow pine, in sections 3 feet wide.
WALL SECTIONS—No. 1 yellow pine drop siding, ¾-inch thick, dressed and matched. Height of wall sections, 8 feet.

55C121—Simplex Ready Made House. Shipping weight, about 5,500 pounds. Price..... **$461.00**

55C121E—Simplex Ready Made House, with porch 8 feet deep instead of 5 feet deep. Shipping weight, about 5,800 pounds. Price..... **$472.00**

Peerless Wall Board (see page 53), plain brown finish, for lining and ceiling (**double wall construction**), add $74.00.
Upper partitions extending to roof, add $6.00.
Screen sections for 5-foot porch, with door, add $52.00.
Screen sections for 8-foot porch, with door, add $66.00.
If foundation posts are not wanted, deduct $8.00.
Half screens for windows and screen doors, add $17.30.
Shutters for all windows, add $18.00.

Price of wall board includes 2x4-inch ceiling joists, panel strips, baseboard, quarter-round and nails. The wall board sheets are 3 feet wide and cut in proper lengths to fit ceiling, any window, door or plain wall section. Not a piece to cut.

PARTITION WALLS—Made of No. 1 yellow pine, ⅝-inch thick, dressed and beaded, in sections 3 feet wide by 7 feet 10 inches high.
ROOFING BOARDS—Made of No. 1 yellow pine, ⅝ inch thick, dressed and beaded on the under side, in sections 3 feet wide.
WINDOW AND DOOR FRAMES—Good grade of window and door frames. Doors and windows are hung in their frames.
ROOFING—Sea Green Fire-Chief Shingle Roll Slate Surfaced Roofing, guaranteed to wear seventeen years.
HARDWARE—All necessary hardware is furnished with house and is fitted in place, galvanized steel chimney included.
PAINTING—Entire house and porch painted with one coat of gray paint.

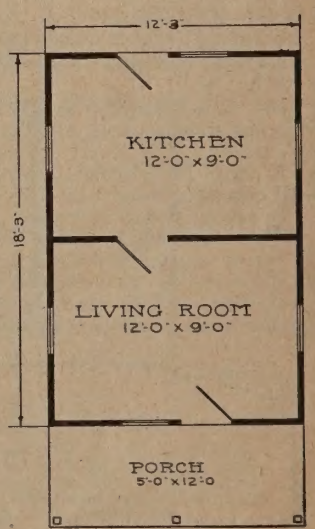

House shipped from factory in SOUTHERN ILLINOIS. Wall Board shipped from factory in OHIO.

Ready Made Miscellaneous Buildings

55C35—Ready Made Refreshment Stand. Size, 12 feet by 12 feet. Shipping weight, about 3,500 pounds.
Price.....**$270.00**

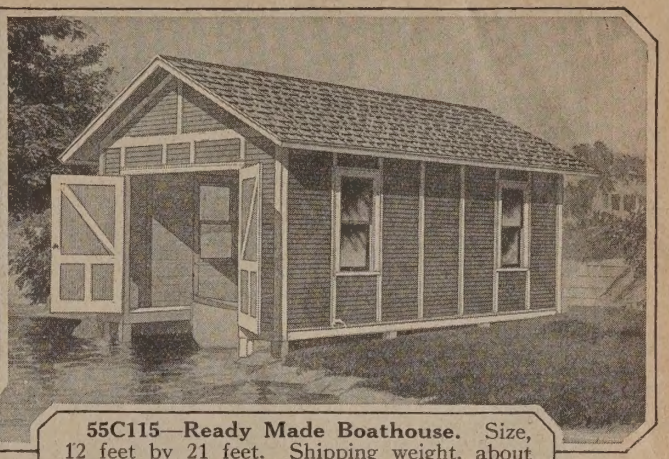

55C115—Ready Made Boathouse. Size, 12 feet by 21 feet. Shipping weight, about 4,900 pounds.
Price.....**$366.00**

55C129—Ready Made Playhouse. Size, 9 feet by 9 feet. Shipping weight, about 2,500 pounds.
Price.....**$240.00**

55C134—Ready Made Stable. Size, 18 feet by 15 feet. Shipping weight, about 7,000 pounds.
Price.....**$407.00**

55C126—Ready Made Photograph Studio. Size, 18 feet by 12 feet. Shipping weight, about 5,600 pounds.
Price.....**$441.00**

55C120—Ready Made Hunters' Cabin. Size, 15 feet by 12 feet. Shipping weight, about 2,900 pounds.
Price.....**$308.00**

The buildings illlustrated on this page are made of the same high grade materials as our larger and more expensive houses. If Peerless Wall Board is desired, we will be glad to quote prices for lining any of these buildings. We can ship promptly and guarantee safe delivery.

Ready Made Playhouse 55C129, Ready Made Hunters' Cabin 55C120 and Ready Made Photograph Studio 55C126 are furnished with floors at the prices quoted. For floors for other buildings write for prices.

NOTE—Ready Made Boathouse 55C115 has a platform 3 feet wide extending along the sides and rear. Ready Made Photograph Studio 55C126 has a darkroom 3 feet by 6 feet with shelf. Ready Made Stable 55C134 has two stalls, each 5 feet by 8 feet, and a feed room 5 feet by 6 feet.

Ready Made Trap Shooting Houses

Can also be used for Hunters' Cabins, Club Houses and Real Estate Offices.

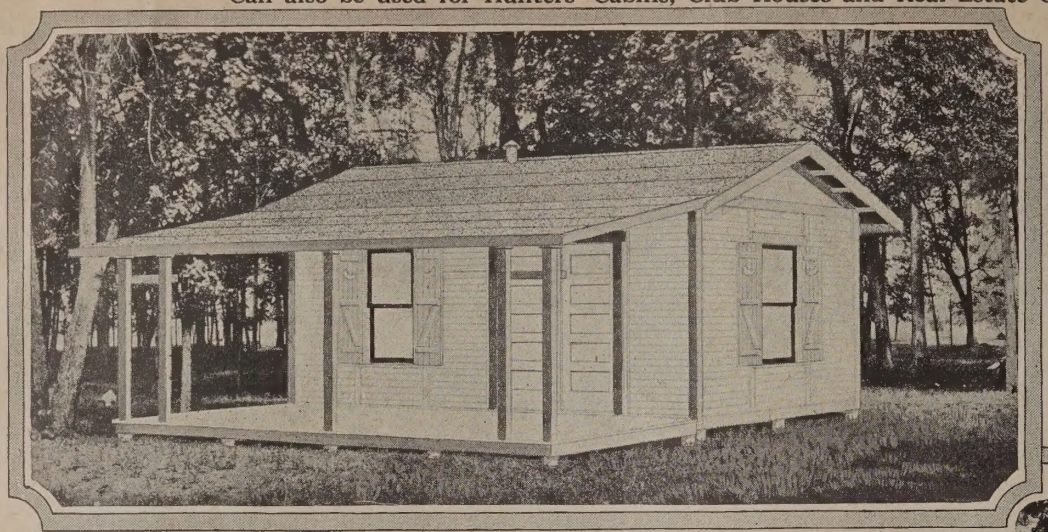

55C3
Trap Shooting
House, 18x9 Feet
$455.00



Floor Plan 55C3.

55C2
Trap Shooting
House, 15x12 Feet
$535.00



Floor Plan 55C2.

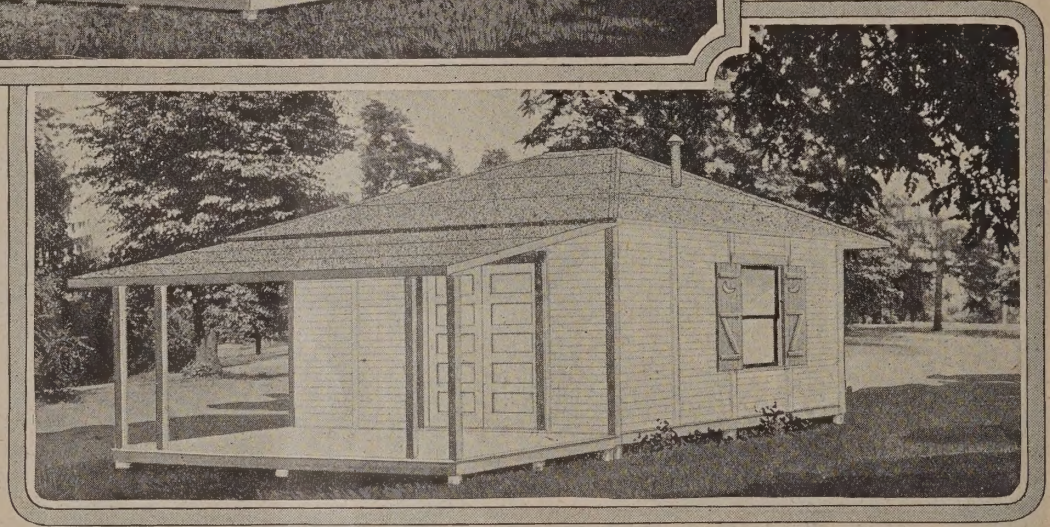

Trap shooting continues to be a very popular sport. Gun clubs are being organized in almost every section of the country. 55C3 and 55C2 illustrated on this page will give you an idea of the neat and attractive Trap Shooting Houses which we furnish at a moderate cost. The same high grade of material and workmanship used in these buildings as in our regular Simplex Ready Made Bungalows.

Specifications for Ready Made Trap Shooting Houses 55C3 and 55C2

55C3—Size (inside), 18 feet wide by 9 feet deep. Porch, 18 feet wide by 8 feet deep.

55C2—Size (inside), 15 feet wide by 12 feet deep. Porch, 15 feet wide by 8 feet deep. Storage room, 3 feet deep by 12 feet wide.

DOORS AND WINDOWS — Glazed two-light windows, glass size 24x26 inches. Double doors in front, each 2 feet 6 inches by 6 feet 6 inches high by 1⅜ inches thick, five-cross panel.

FOUNDATION—We furnish with the house cedar foundation posts 6 inches in diameter, 2 feet 6 inches long. Brick, stone or cement are not furnished.

SILLS—3x6-inch No. 1 yellow pine and rest on foundation posts.

FLOOR JOISTS—2x6-inch No. 1 yellow pine, hung in patent steel stirrups, 16 inches on centers.

FLOORING — $^{13}/_{16}$x3¼-inch No. 1 yellow pine, dressed and matched.

WALL SECTIONS—No. 1 yellow pine drop siding, ¾ inch thick, dressed smooth on inside. Height of walls, 8 feet.

ROOFING—Best-of-all, 2½-ply.

HARDWARE—All necessary hardware furnished with the house and is fitted in place; a galvanized steel chimney is included.

PAINT—Entire house and porch painted on the outside with one coat of gray paint.

55C3—Simplex Ready Made Trap Shooting House. Shipping weight, about 6,000 pounds.

Price.....**$455.00**

Peerless Wall Board (see page 53), plain brown finish, for lining and ceiling (**double wall construction**), add $71.00.

Screen sections for porch, with door, add $94.00.

Shutters for doors and windows, add $17.00.

If foundation posts are not wanted, deduct $7.00.

55C2—Simplex Ready Made Trap Shooting House. Shipping weight, about 7,500 pounds.

Price.....**$535.00**

Peerless Wall Board (see page 53), plain brown finish, for lining and ceiling (**double wall construction**), add $78.00.

Screen sections for porch, with door, add $79.00.

Shutters for doors and windows, add $17.00.

If foundation posts are not wanted, deduct $6.00.

House shipped from factory in SOUTHERN ILLINOIS. Wall board shipped from factory in OHIO.

Ready Made Trap Shooting Houses

Can also be used for Hunters' Cabins, Club Houses and Real Estate Offices.

55C1
Trap Shooting House,
12x9 Feet

$298.00



FLOOR PLAN.

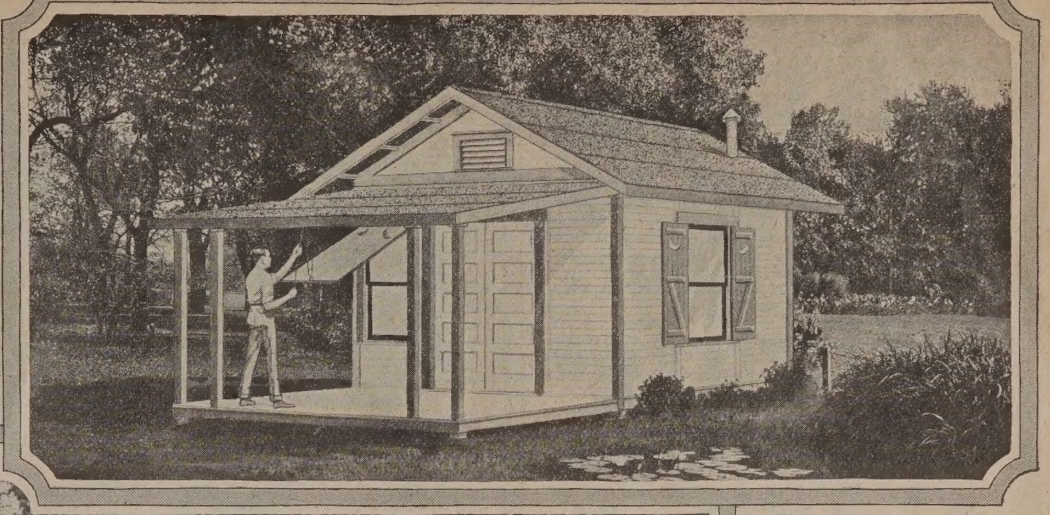

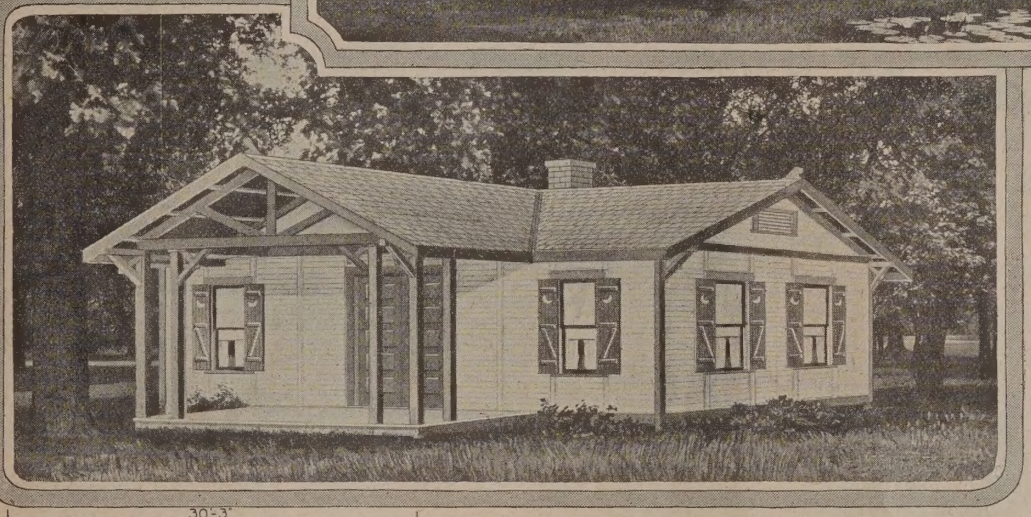

55C5
Trap Shooting House,
30x15 Feet

$876.00

55C175
Gun Rack
For 22 Guns

$17.00

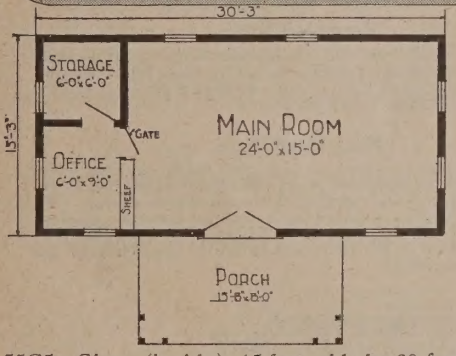

We have spent considerable time investigating the kind of club house trap shooters require and we believe the designs illustrated on this page to be in line with their requirements. Note how attractive these buildings can be made when shutters are used for the windows. There is a ventilator in each gable section. This is a feature that is generally preferred by most purchasers of Trap Shooting Club Houses.

Specifications for Ready Made Trap Shooting Houses 55C5 and 55C1

55C5—Size (inside), 15 feet wide by 30 feet deep. Storage room, 6 feet wide by 6 feet deep. Office, 6 feet wide by 9 feet deep. Porch, 15 feet 8 inches wide by 8 feet deep.

55C1—Size (inside), 12 feet wide by 9 feet deep. Porch, 12 feet wide by 8 feet deep. Storage room, 3 feet deep by 9 feet wide.

DOORS AND WINDOWS—Glazed two-light windows, glass size 24 by 26 inches. Inside door, 2 feet 6 inches by 6 feet 6 inches, 1⅜ inches thick, five-cross panel. Double doors in front, each door 2 feet 6 inches by 6 feet 6 inches high, 1⅜ inches thick, five-cross panel.

FOUNDATION—We furnish with the house cedar foundation posts 6 inches in diameter, 2 feet 6 inches long. Brick, stone or cement are not furnished.

SILLS—3x6-inch No. 1 yellow pine and rest on foundation posts.

FLOOR JOISTS—2x6-inch No. 1 yellow pine, hung in patent steel stirrups, 16 in. on centers.

FLOORING—$^{13}/_{16}$x3¼-inch No. 1 yellow pine, dressed and matched.

WALL SECTIONS—No. 1 yellow pine drop siding, ¾ inch thick, dressed smooth on inside. Height of walls, 8 feet.

ROOFING—For 55C5 Sea Green Fire-Chief Shingle Roll Roofing, guaranteed for seventeen years. Roofing for 55C1 Best-of-all, 2½-ply.

HARDWARE—All necessary hardware furnished with house and is fitted in place; a galvanized steel chimney is included.

PAINT—Entire house and porch painted on the outside with one coat of gray paint.

55C1—Simplex Ready Made Trap Shooting Club House. Shipping weight, about 4,800 pounds.
Price.....**$298.00**
Peerless Wall Board (see page 53), plain brown finish, for lining and ceiling (**double wall construction**), add $64.00.
Screen sections for porch, with door, add $64.00.
Shutters for doors and windows, add $17.00.
If foundation posts are not wanted, deduct $5.00.
House shipped from Southern Illinois. Wall board shipped from factory in Ohio.

55C5—Simplex Ready Made Trap Shooting Club House. Shpg. wt., about 15,000 lbs. Price...**$876.00**
Peerless Wall Board (see page 53), plain brown finish, for lining and ceiling (**double wall construction**), add $202.00.
Screen sections for porch, with door, add $73.00.
If foundation posts are not wanted, deduct $10.00.
Shutters for doors and windows, add $31.80.

55C175—Collapsible Gun Rack for twenty-two guns.
Price.....**$17.00**

This Garage Was Put up in Five Hours and Forty-Five Minutes

See Affidavit on Page 28

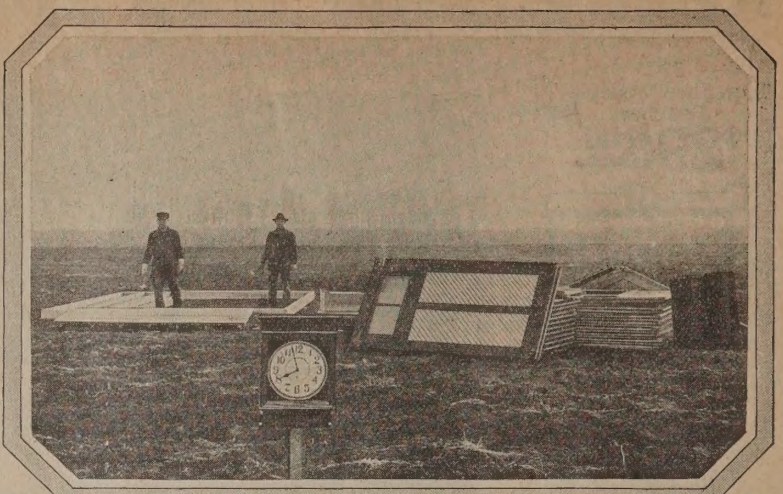

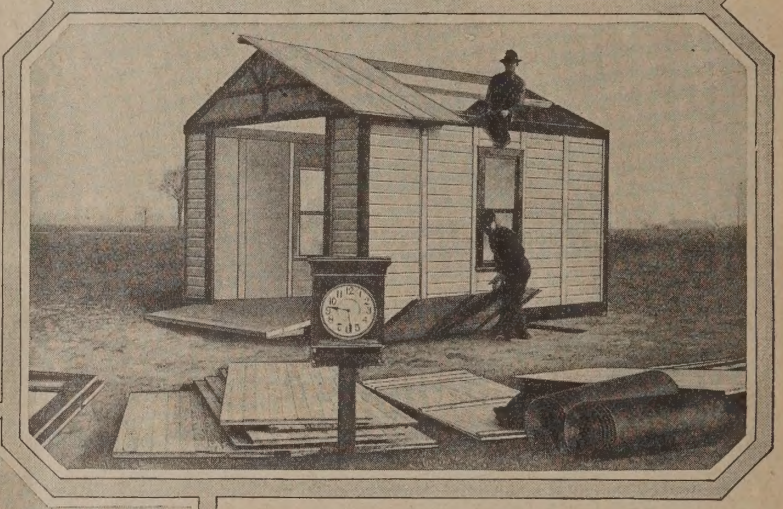

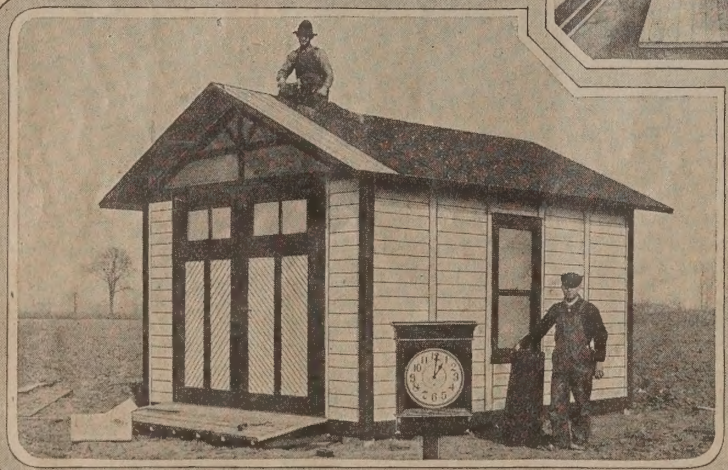

Eight o'Clock.

The first picture, taken a few minutes before eight o'clock, shows the sections of Ready Made Garage 55C17 on the ground ready for erection. For a complete description of this Ready Made Garage 55C17 see page 35.

Half Past Nine.

The next picture, taken an hour and thirty minutes later, shows the garage well under way. Sills have been bolted at the corners and the joists hung in the steel joist hangers. The floor and wall sections have been assembled and the triangular gable pieces of the roof connected by ridge pole and roof supports. Two of the roof sections are in position and the third is being raised.

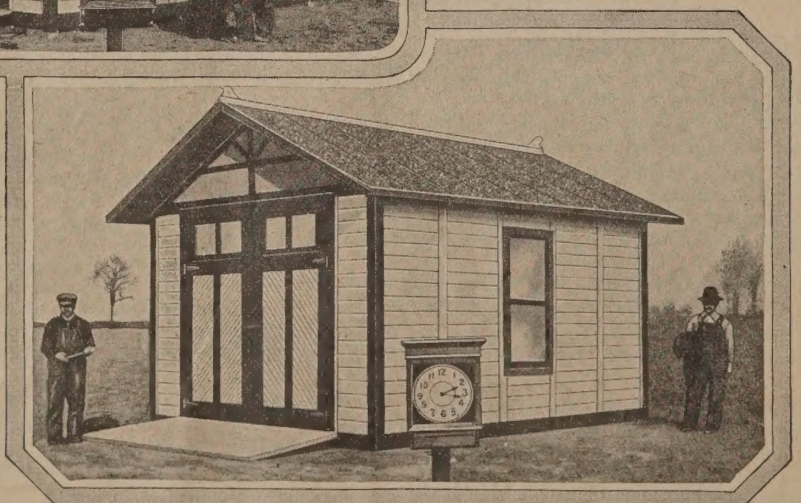

One o'Clock.

By one o'clock the main part of the building has been completed. The doors have been put on their hinges, all of the roof sections in place and part of the roofing tacked on.

Read the Affidavit on Page 28.

Quarter Past Two.

The last picture, taken after five hours and forty-five minutes of work, shows the garage completed ready for use. The roofing has been applied, the ridge roll has been fastened along peak and finished at ends with fancy ridge finials.

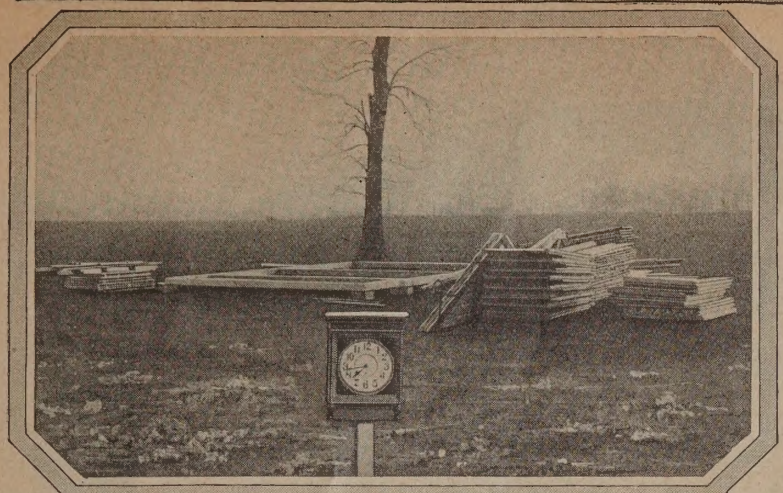

This House Was Put up in Eight Hours only Two Men Required

See Affidavit on Page 28

If you want a house in a hurry, at small cost, here's your chance.

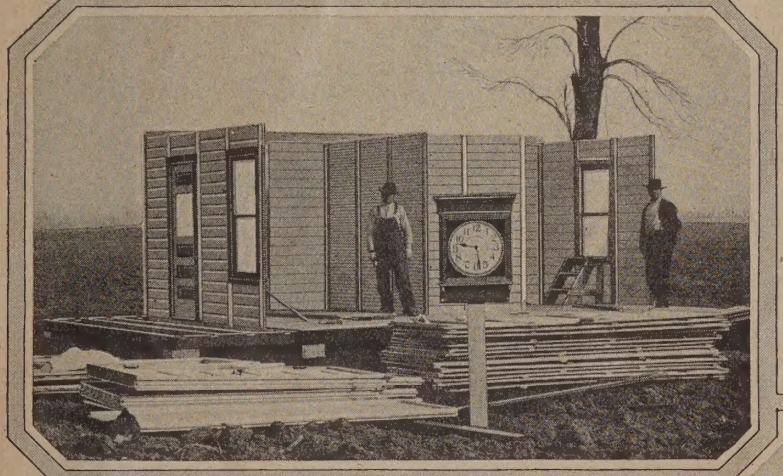

Eight o'Clock.

The first picture shows all the sections on the ground ready for erection. They include the floor, walls and roof sections of our three-room Ready Made House 55MH122 shown on page 101.

Half Past Nine.

The next picture, taken an hour and a half after work was started, shows three sides of the building in position, part of the interior partitions and most of the floor sections set in place.

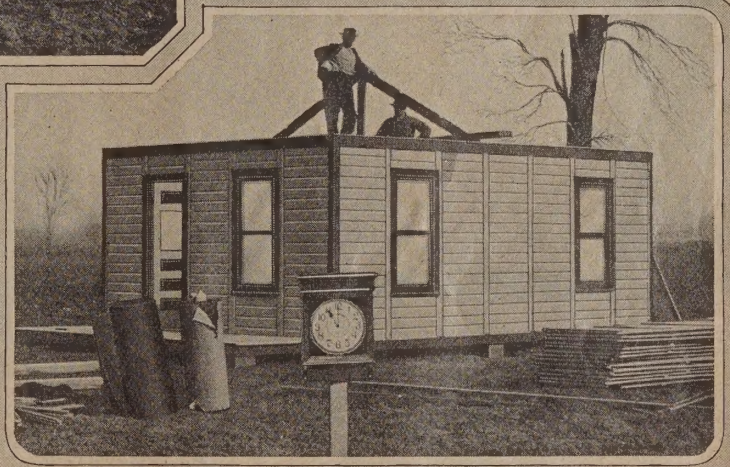

You Can Do This and Reduce the High Cost of Living

Four Thirty.

This picture shows the house completed and the men ready to go home, having completed the job in about eight hours. This proves the great economy of our Simplex Ready Made Buildings and illustrates how easily the parts are assembled.

Eleven o'Clock

By 11 o'clock the entire wall and interior partition sections have been put in position and all the doors and windows hung in their frames.

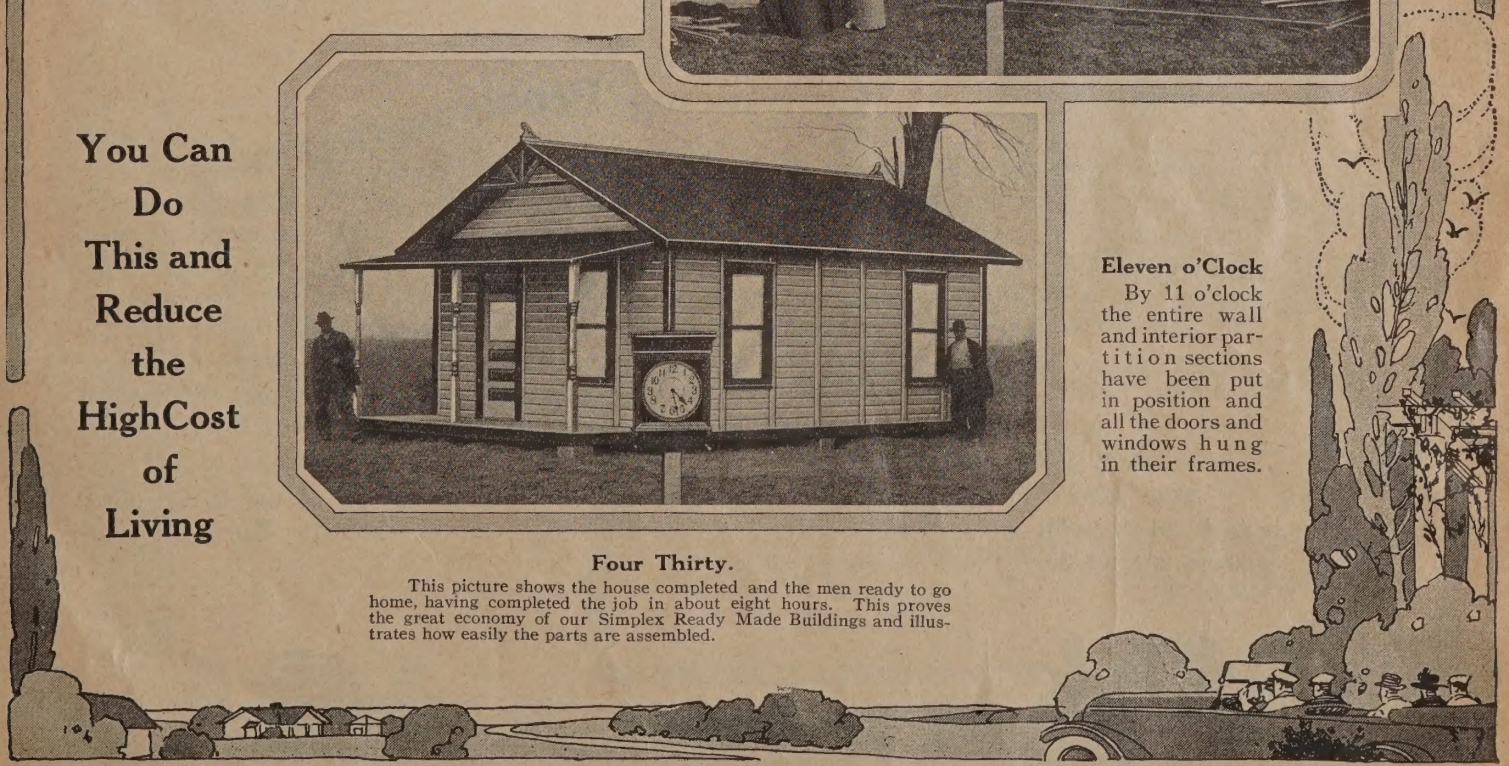

AFFIDAVIT of Kennedy

SHORT GENERAL AFFIDAVIT Form 155 8 E. Y. Horler, Printer, Chicago

State of ILLINOIS }
County of ALEXANDER } ss.

E. A. KENNEDY

of the City of CAIRO County of ALEXANDER

and State of ILLINOIS. being duly sworn, doth depose and say that

On the 22nd day of January, 1914 the Ready-Made House shown in the accompanying photographs was erected by two men in 8 hours and 33 minutes, during which time the men quit work 30 minutes for lunch. Deponent further says, that the Ready-Made Garage also shown in the photographs was erected by two men on the same day in 6 hours and 15 minutes, 30 minutes of this time being devoted to lunch. The clock placed opposite the buildings faithfully records the exact progress.

And further this deponent says not.

(1) E A Kennedy

Subscribed and sworn to before me this 31st day of January A. D. 1914

(2) E. E. Comings
Notary Public

(1) This line is for signature of affiant.
(2) These two lines are for signatures and title of officer administering oath.

Convincing Proof

In order to prove beyond the shadow of a doubt that our Ready Made Buildings are easy to erect and that the work can be done quickly, we show on the preceding pages reproductions of actual photographs taken while one of our Ready Made Garages and one of our Ready Made Houses were being put up. The clock, shown in the foreground, records the exact time occupied in putting up these two buildings ready for occupancy. Not satisfied with this, we supplement the pictures showing the time in which these buildings were erected with a photographed reproduction of an affidavit signed and sworn to before a notary public, thus legally establishing the absolute truth of our claim that the Ready Made Garage was put together in five hours and forty-five minutes and the Ready Made Three-Room House in eight hours and three minutes.

This series of photographs and affidavit furnish absolute proof of the EASE and RAPIDITY with which Simplex Ready Made Buildings can be erected. Turn back to pages 26 and 27.

CABLE ADDRESS "DELCO DAYTON"
TELEGRAPHIC CODES, WESTERN UNION, A.B.C. 5TH EDITION, LIEBER'S STANDARD

The Dayton Engineering Laboratories Co.

LABORATORY AND EXECUTIVE OFFICES, DAYTON, OHIO, U.S.A.

FACTORIES AT DAYTON & CHICAGO

Sept. 8, 1913.

Sears, Roebuck & Co.,
Chicago, Ill.

Gentlemen:

This is to certify that we have purchased some twenty of your portable houses during the past three months and we are pleased to report that they have come to us as represented in every particular.

We are handing your representative some photographs showing the cottages after having been erected, which we trust may be satisfactory.

Yours very truly,

THE DAYTON ENGINEERING LABORATORIES CO.

G. B. McCann,

Secretary & Treasurer.

GBM/B.

Testimony Worth Having

Throughout this book you will find letters from people who have purchased our Ready Made Houses and who speak with experience after having lived in them for a considerable length of time. We take particular pleasure, however, in reproducing the letter to the left and in submitting to you on the following pages pictures reproduced from actual photographs. Here we show you our Ready Made Houses as actual Summer residences, occupied by people whose judgment in selecting our Ready Made Buildings in preference to others is about the best endorsement you could ask for. The Dayton Engineering Laboratories Co. is a firm well and favorably known to all manufacturers of automobiles and automobile supplies as well as to all owners of automobiles. We ask this question: If the Dayton Engineering Laboratories Co. have found our Ready Made Buildings satisfactory in design, quality and price, is it not reasonable to suppose that Simplex Houses and Garages represent the biggest value anyone could desire? Look over our line. We have a house suitable for every requirement. We have a garage that will provide protection for any style or design of machine.

Read What This Man Says About Our Ready Made Garages.

115 Washington Ave., Cambridge, Mass.

Sears, Roebuck and Co., Chicago, Ill.

Gentlemen:—We are all pleased with the portable garage you recently shipped to Mr. Richard H. Parry, Woodbridge St., Cambridge. Friends who see it admire it very much and when we tell them the price, they hardly believe it. I sincerely hope you will sell many more in this locality and believe you have made many good friends hereabouts.

Yours respectfully,
W. ALLEN PARRY.

This Man Put Up His Garage in Five Hours.

908 Elizabeth Street, Utica, N. Y.

Sears, Roebuck and Co., Chicago, Ill.

Sirs:—The garage I bought of you is up and I am well satisfied with it. I had one man help me and neither of us is a carpenter. We commenced at 1:00 p. m. and had the building up, except hanging the doors, at 6.00 p. m. Everything worked fine and the garage is O. K.

Yours truly,
THOMAS PLATT.

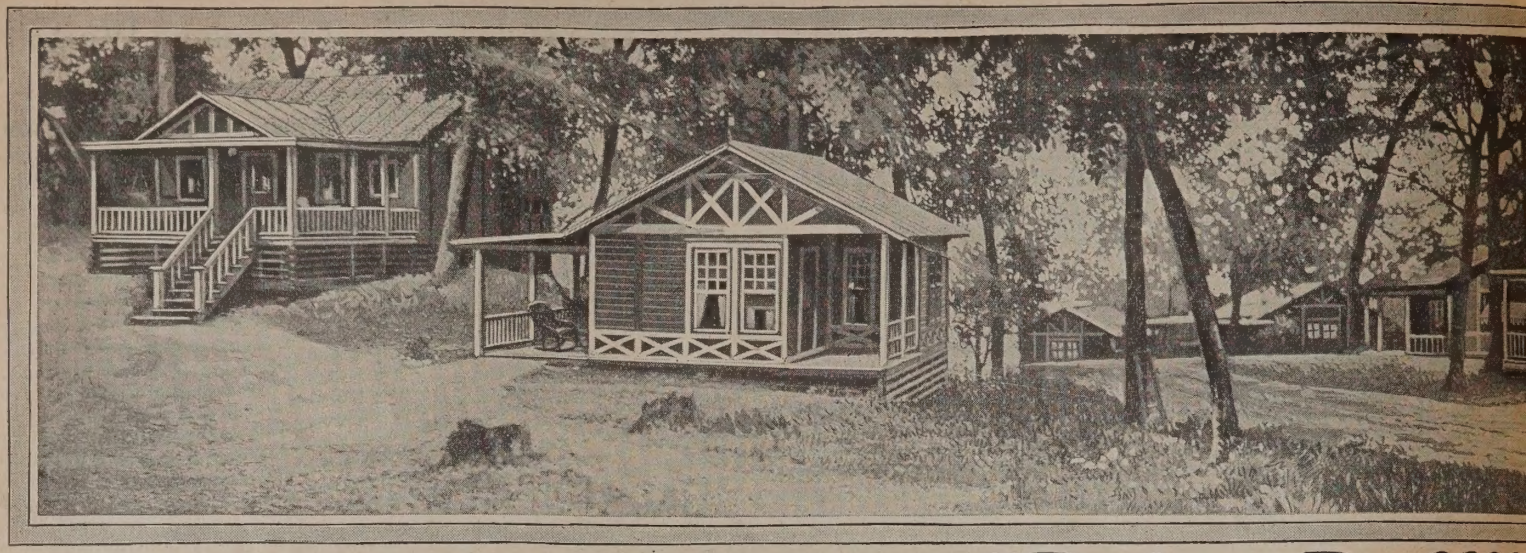

"Delco Dell,"

Close to Nature Under Leafy Shade

Sears, Roebuck and Co.'s Ready Made Houses Occupied as Summer

Twenty-two Ready Made Houses, including every house shown in these pictures, were purchased from us during 1913 and have been used as summer cottages by officials of The Dayton Engineering Laboratories Company, Dayton, Ohio. Read the letter written us by the secretary and treasurer of this company stating that these houses came to them "as represented in every particular." This means that you can depend absolutely upon the

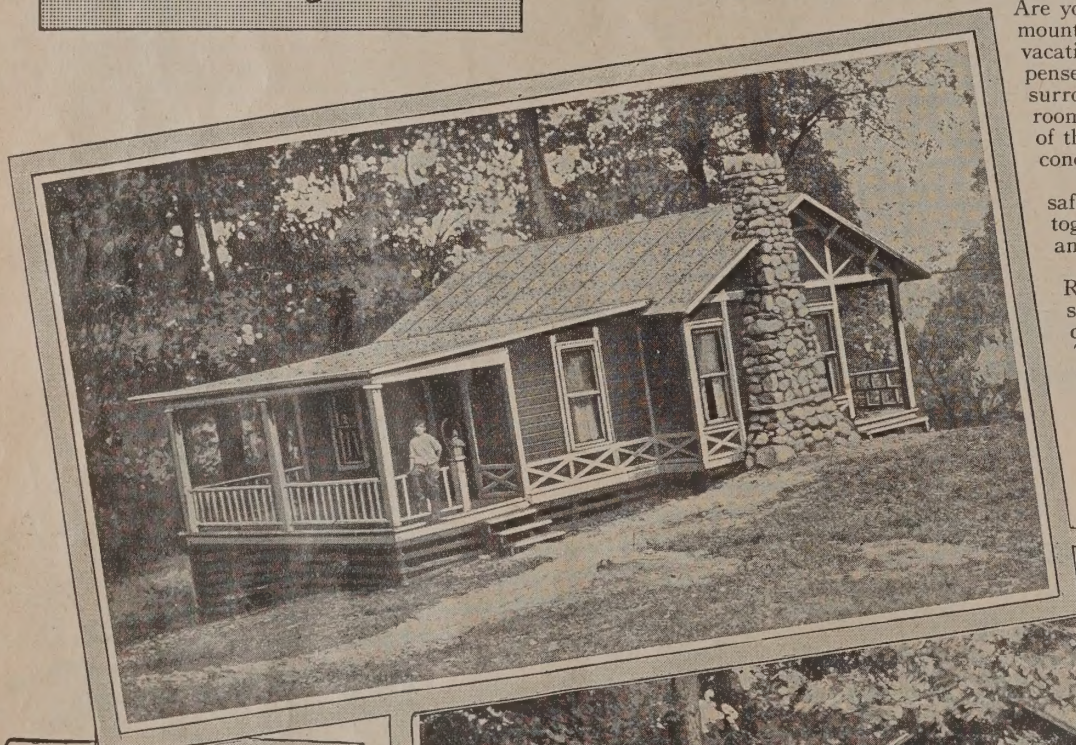

Are you planning a summer vacation for yourself mountains? If so, why not take your Ready Made vacation period? If you wish you can take it hom pense, or possibly sell it for more than you paid f surroundings affords a real opportunity for enjoy room for children to play. Plenty of sunshine, ai of the city, the entire family can recuperate and g conditions.

Let us quote you a price delivered to your sta safe delivery. All sections, doors and windows together without driving a nail. Any building i and we guarantee it to give the best of service a

Are your neighbors planning a summer co Ready Made Houses to establish a little village self to your heart's content, under your own r or intruders. In a week you can have your mo Thousands of people in different sections of thusiastic about the enjoyment it affords an avoiding hotel expenses or rent for cottage exclusiveness and comfort it places within t or one hundred Ready Made Buildings, all them, and guaranteed to last many years. in this book which you think best suited fo the road to the real enjoyment of life out o

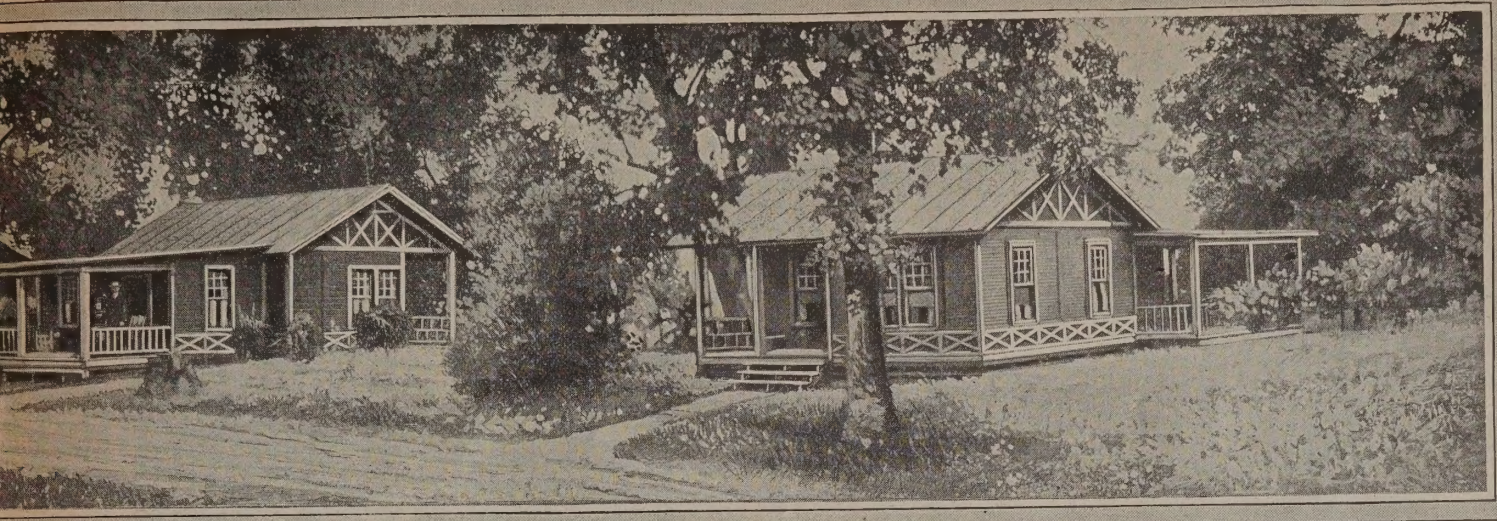

Dayton, Ohio

Cottages by Executives of the Dayton Engineering Laboratories Co.

Summer Comfort at Small Cost

claims which we make in this catalog about the ease and rapidity in construction, the good quality of the materials and the general adaptability of our Ready Made Houses. The house shown on the front cover is another building purchased by The Dayton Engineering Laboratories Company and it tells its own story of summer convenience, economy and comfort. Read the letter on page 29.

nd family in the woods, by the seashore or in the House along with you and save rent for the entire e again and store it until next season, at small ex- r it. A Ready Made House erected in the proper ng the beauties of nature at her best. Plenty of and shade. Away from the noise, dust and dirt row strong and healthy under the most favorable

tion for any Ready Made House. We guarantee vill come to you perfectly protected, ready to put this catalog can be put up by two handy men, d satisfaction for years to come.

ony? You can club together for a number of or summer town of your own, and enjoy your- egulations, without interference from strangers lel summer town built up, ready for occupancy. he country follow this plan and they are en- l the big saving it enables them to make by leased for the season, to say nothing of the eir reach. We can sell you a dozen, twenty itted, ready to put together when you receive Drop us a line about any design or designs your requirements and let us start you on doors.

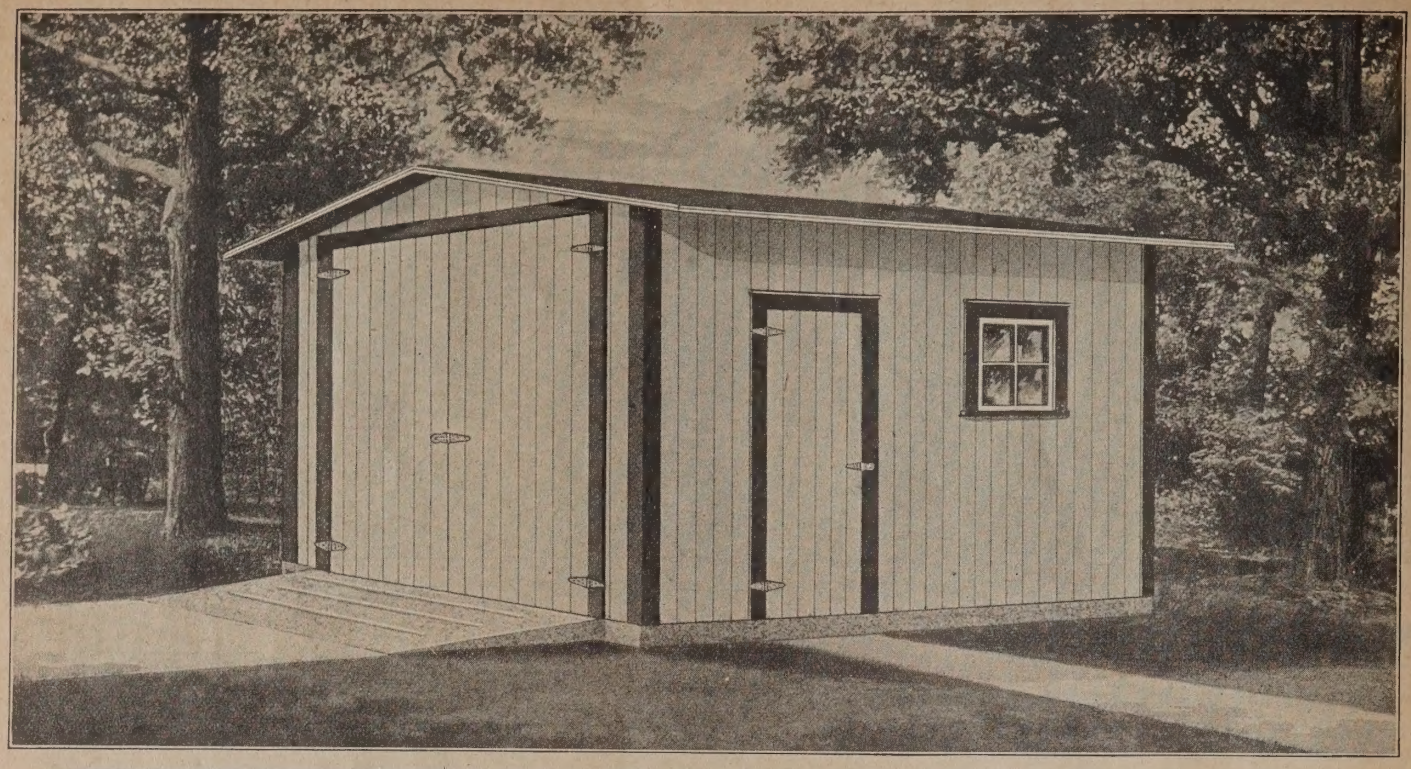

The UTILITY

Ready Made Frame Garage 55C168 Price, $163.00

This low priced, substantial garage will pay for itself in a few months. Nothing has been sacrificed in workmanship or grade of material, and you can depend on this garage providing a substantial shelter for your automobile at a minimum cost.

This 10x14-foot size is suitable for many of the small and medium size cars.

Specifications for Ready Made Frame Garage 55C168

SIZES—10 feet wide by 14 and 16 feet deep; walls, 8 feet to eaves.

WALL SECTIONS—Vertical yellow pine, No. 1 grade, dressed and matched siding ¾ inch thick.

ROOF SECTIONS—No. 1 yellow pine, dressed and matched and beaded on under side, ⅝x4 inches.

DOUBLE DOORS—Made of No. 1 yellow pine ¾-inch matched siding; opening size, 8 feet wide by 7 feet 8 inches high. Doors already fitted and hung in front section with two pairs large steel strap hinges; lock, hasp and staple furnished.

SIDE DOOR—Made of ¾-inch No. 1 yellow pine matched siding, 2 feet wide by 6 feet high, hung in frame with steel strap hinges; hasp with staple furnished.

WINDOW—One 4-light glazed window, hinged at top to swing out, 24 inches wide by 26 inches high.

ROOFING—Best-of-all Two-Ply Roofing with nails and roofing cement. Guaranteed seven years.

PAINT—Entire garage has one heavy coat of gray paint outside.

CONSTRUCTION—Each side made in two sections; front and rear, one section each. Roof sections and supports cut to exact size, ready for easy assembling. Framework consists of 2x4's and 2x2's which form a part of the wall sections, so that the whole building can be fastened together with bolts and screws.

Catalog No.	Price	Shipping Weight, About	Foundation Dimensions	If Foundation Posts Are Omitted, Deduct
55C168	**$163.00**	2,600 pounds	10 feet x 14 feet	$4.00
55C168C	**177.00**	3,200 pounds	10 feet x 16 feet	4.50

Note that the door and window may be placed on either side, as desired, without extra charge.

Garage shipped from our own factory in SOUTHERN ILLINOIS.

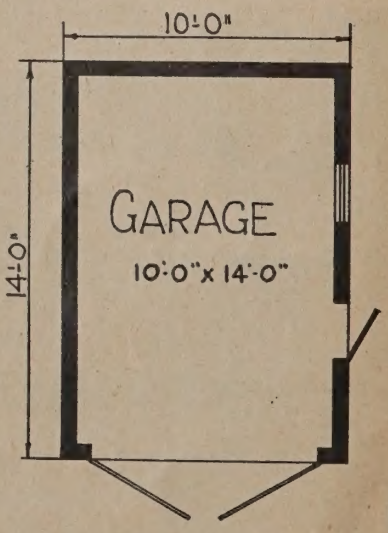

Read What This Man Says About Our Ready Made Garages.

115 Washington Ave.,
Cambridge, Mass.

Sears, Roebuck and Co., Chicago, Ill.

Gentlemen:—We are all pleased with the portable garage you recently shipped to Mr. Richard H. Parry, Woodbridge St., Cambridge. Friends who see it admire it very much and when we tell them the price, they hardly believe it. I sincerely hope you will sell many more in this locality and believe you have made many good friends hereabouts.

Yours respectfully,
W. ALLEN PARRY.

This Man Put Up His Garage in Five Hours.

908 Elizabeth St.,
Utica, N. Y.

Sears, Roebuck and Co., Chicago, Ill.

Sirs:—The garage I bought of you is up and I am well satisfied with it. I had one man help me and neither of us is a carpenter. We commenced at 1:00 p. m. and had the building up, except hanging the doors, at 6:00 p. m. Everything worked fine and the garage is O. K.

Yours truly,
THOMAS PLATT.

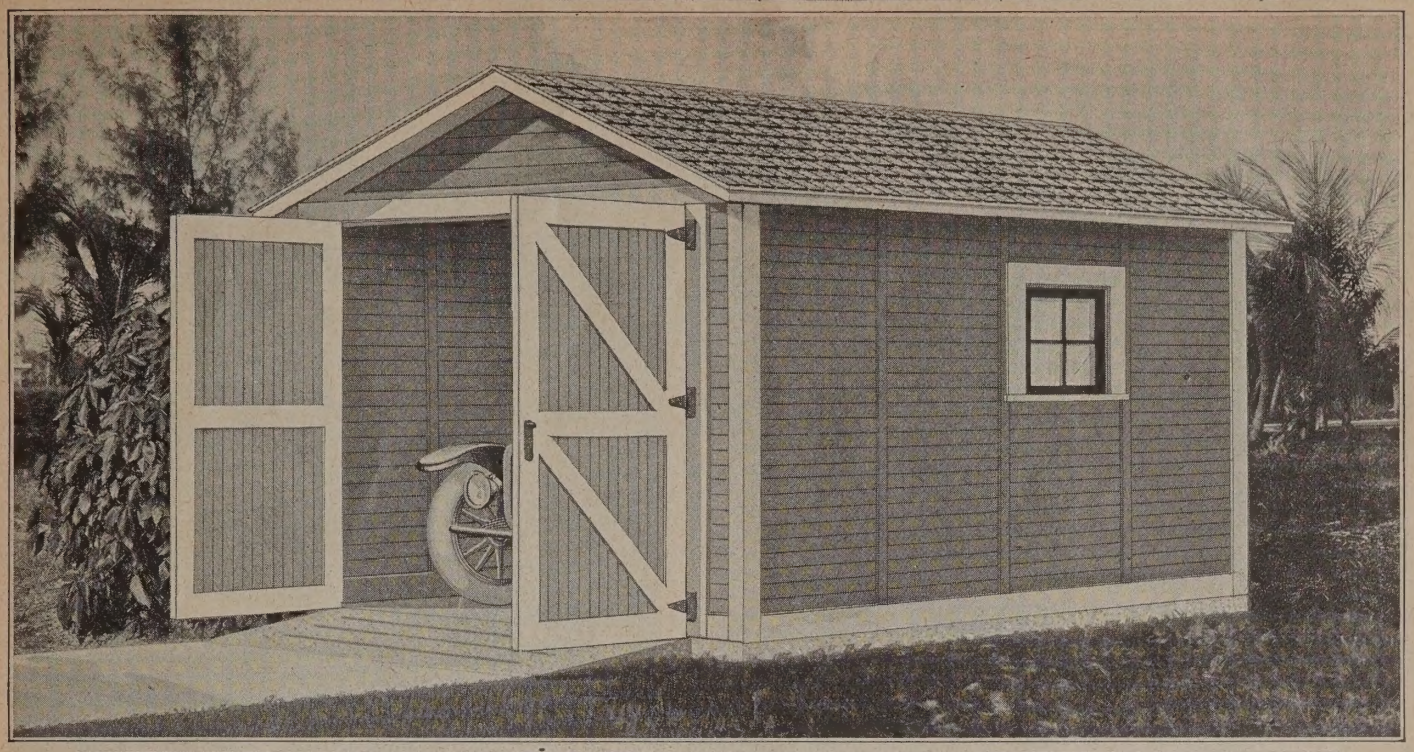

The SECURITY

Ready Made Frame Garage 55C171 Price, $185.00

For high grade workmanship, careful selection of material and low price, garage 55C171 is an unequaled bargain as a frame building. People who have limited space in which to put up a garage will find this 9-foot wide building just what they want. It has a standard 8x8-foot door entrance, large enough for a standard size automobile to enter with top raised.

This inexpensive, neat appearing garage is substantially constructed of well seasoned lumber, guaranteed to give good satisfaction.

Save money by taking prompt advantage of these special low prices.

Specifications for Ready Made Frame Garage 55C171

SIZE—Width, 9 feet; length, 12, 15 or 18 feet, according to price. Height of walls, 8 feet.

DOUBLE DOORS—Hinged double doors, plain panels with cross braces; standard opening, 8x8 feet.

WINDOW—Hinged sash, glazed, 4 lights 10x12 inches; window opening size 2 feet 1 inch by 2 feet 6 inches.

SILLS—Size, 3x6 inches, grooved to receive wall sections.

WALL SECTIONS—No. 1 yellow pine drop siding, ¾ inch thick.

ROOF SECTIONS—No. 1 yellow pine roof boards, ⅝ inch thick, beaded on the under side.

ROOFING—Sea Green Fire-Chief Shingle Roll Roofing, with nails and cement.

HARDWARE—Hinges, hasp, bolts, screws and metal clips furnished.

PAINTING—Outside of garage painted one coat of gray paint.

FLOOR—When floor is ordered we furnish No. 1 yellow pine flooring in sections 13/16 inch thick, 2x6-inch joists, steel joist hangers, foundation posts and wood incline for entrance.

Catalog Number	Price	Shipping Weight, About Pounds	Foundation Dimensions Ft. In. Ft. In.	If Foundation Posts Are Omitted Deduct	Wood Floor	Weight, Floor, Pounds
55C171	**$185.00**	2,000	9 3x12 3	$4.50	**$45.00**	500
55C172	**207.00**	2,300	9 3x15 3	4.50	**53.00**	670
55C173	**232.00**	2,600	9 3x18 3	4.50	**60.00**	800

The large double doors when thrown open give plenty of light, so that for ordinary purposes only one window is necessary. If extra light is desired we can furnish a single sash window with four lights, glass size 10x12 inches, at $4.00 extra. A side door 2 feet 6 inches wide by 6 feet 6 inches high complete with hardware and glazed will cost $6.00 extra.

Garage shipped from factory in SOUTHERN ILLINOIS.

100 15th Ave., Astoria, L. I., N. Y.
Sears, Roebuck and Co.,
Chicago, Ill.
Dear Sirs:—

I beg to advise that I have received the garage I bought from you. It gives me pleasure to state that the garage not only fulfilled my expectations but even exceeded them. It is well designed and a handsome structure, and has already aroused favorable attention in my neighborhood.

Assuring you of my complete satisfaction of your garage, I remain,

Yours truly,
LOUIS WEICKUM.

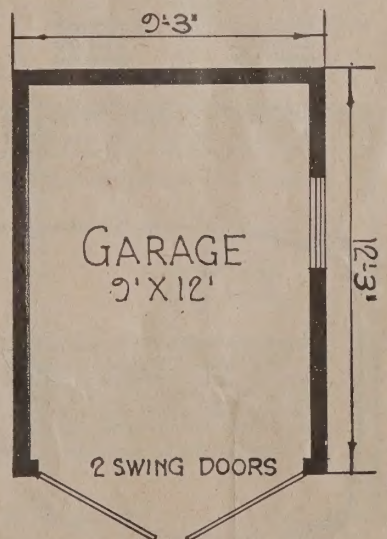

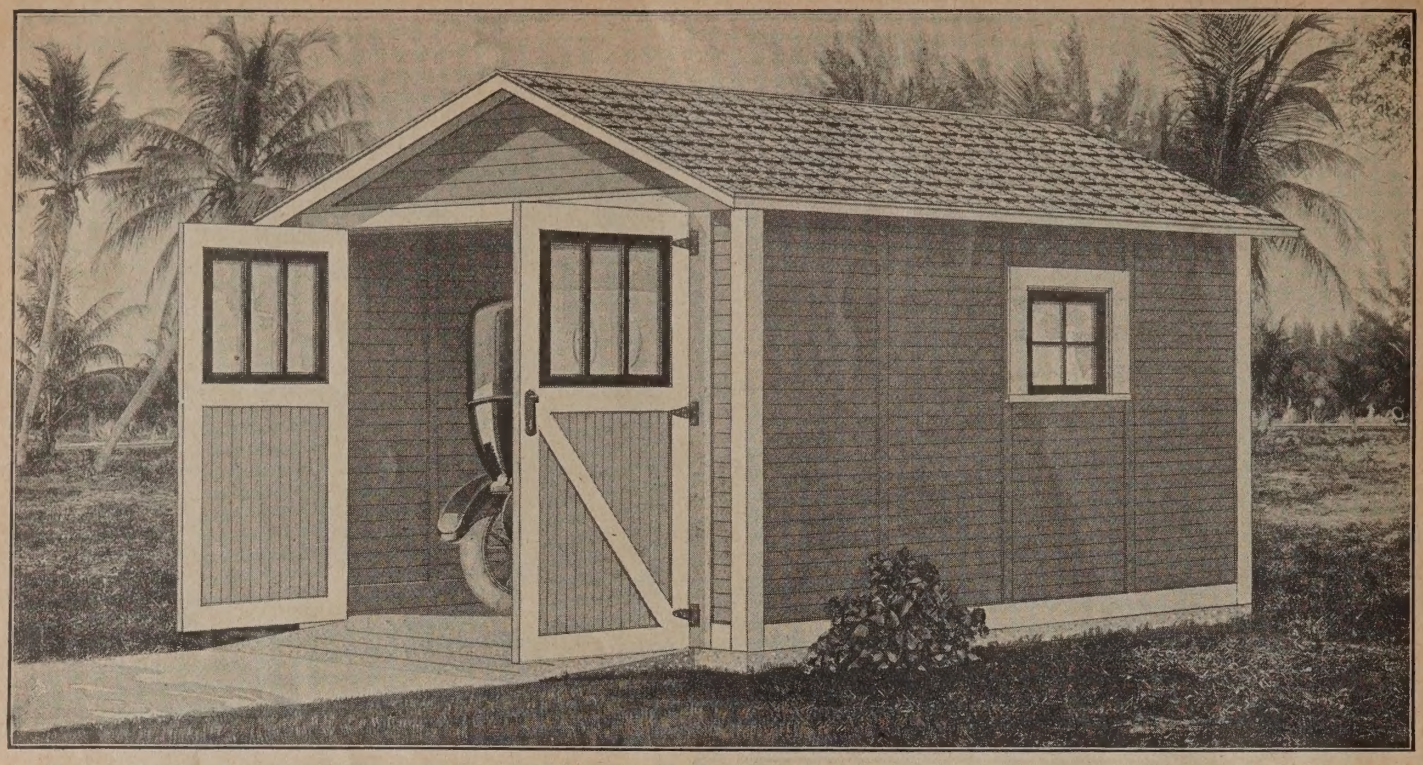

The HOMESTEAD

Ready Made Frame Garage 55C181 Price, $202.00

This pleasing design, 55C181, is like 55C171 on page 33, but has glazed double doors instead of plain. It is furnished with our high grade Sea Green Fire-Chief Shingle Roll Roofing, guaranteed to wear without change of color for seventeen years. A garage exposed to view from the public highway needs to have an artistic appearance and this design, 55C181, with Fire-Chief Sea Green Shingle Roll Roofing, gray painted side walls and fancy glazed double doors, will make a very attractive garage.

Specifications for Ready Made Garage 55C181

SIZE—Width, 9 feet; length, 12, 15 or 18 feet, according to price. Height of walls, 8 feet.
DOUBLE DOORS—Hinged double doors, upper panels glazed with clear glass; standard opening, 8x8 feet.
WINDOW—Hinged sash glazed, 4 lights 10x12 inches; window opening size 2 feet 1 inch by 2 feet 6 inches.
SILLS—Size, 3x6 inches, grooved to receive wall sections.
ROOF SECTIONS—No. 1 yellow pine boards, 5/8 inch thick, beaded on the under side.
WALL SECTIONS—No. 1 yellow pine drop siding 3/4 inch thick.
ROOFING—Sea Green Fire-Chief Shingle Roll Roofing, with nails and cement.
HARDWARE—Hinges, hasp, bolts, screws and metal clips furnished.
PAINTING—Outside of garage painted one coat of gray paint.
FLOOR—When floor is ordered we furnish No. 1 yellow pine floor sections 13/16 inch thick, 2x6-inch joists, steel joist hangers and foundation posts.

Catalog No.	Price	Shipping Weight, About	Foundation Dimensions	If Foundation Posts are Omitted, Deduct	Wood Floor	Weight, Floor
55C181	**$202.00**	2,100 lbs.	9 ft. 3 in.x12 ft. 3 in.	**$4.00**	**$45.00**	500 lbs.
55C182	**222.00**	2,400 lbs.	9 ft. 3 in.x15 ft. 3 in.	**4.00**	**53.00**	670 lbs.
55C183	**246.00**	2,700 lbs.	9 ft. 3 in.x18 ft. 3 in.	**4.00**	**60.00**	800 lbs.

The large double doors when thrown open give plenty of light, so that for ordinary purposes only one window is necessary. If extra light is desired we can furnish a single sash window with four lights, glass size 10x12 inches, at $4.00 extra. A side door 2 feet 6 inches wide by 6 feet 6 inches high complete with hardware and glazed will cost $6.00 extra.

Garage shipped from factory in SOUTHERN ILLINOIS.

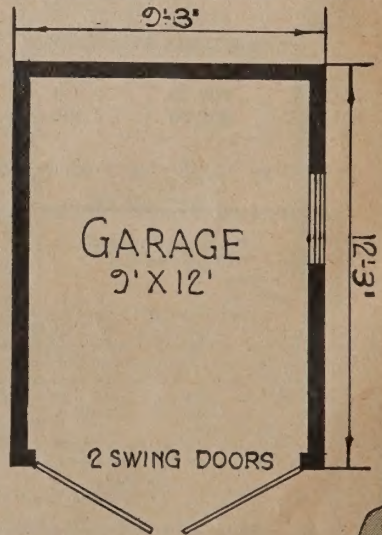

New York, N. Y.

Sears, Roebuck and Co., Chicago, Ill., Dept. 55.

Gentlemen:—The garage I purchased of you is well made and was assembled without any trouble. I can assure you that I am well satisfied and several who have seen the garage expressed their opinion that it is far more serviceable than what is generally thought of portable garages.

Thanking you for past favors, I remain,

ED. E. CLAUSSEN.

Our Simplex Garages Are Ready Made, Not Merely Ready Cut.

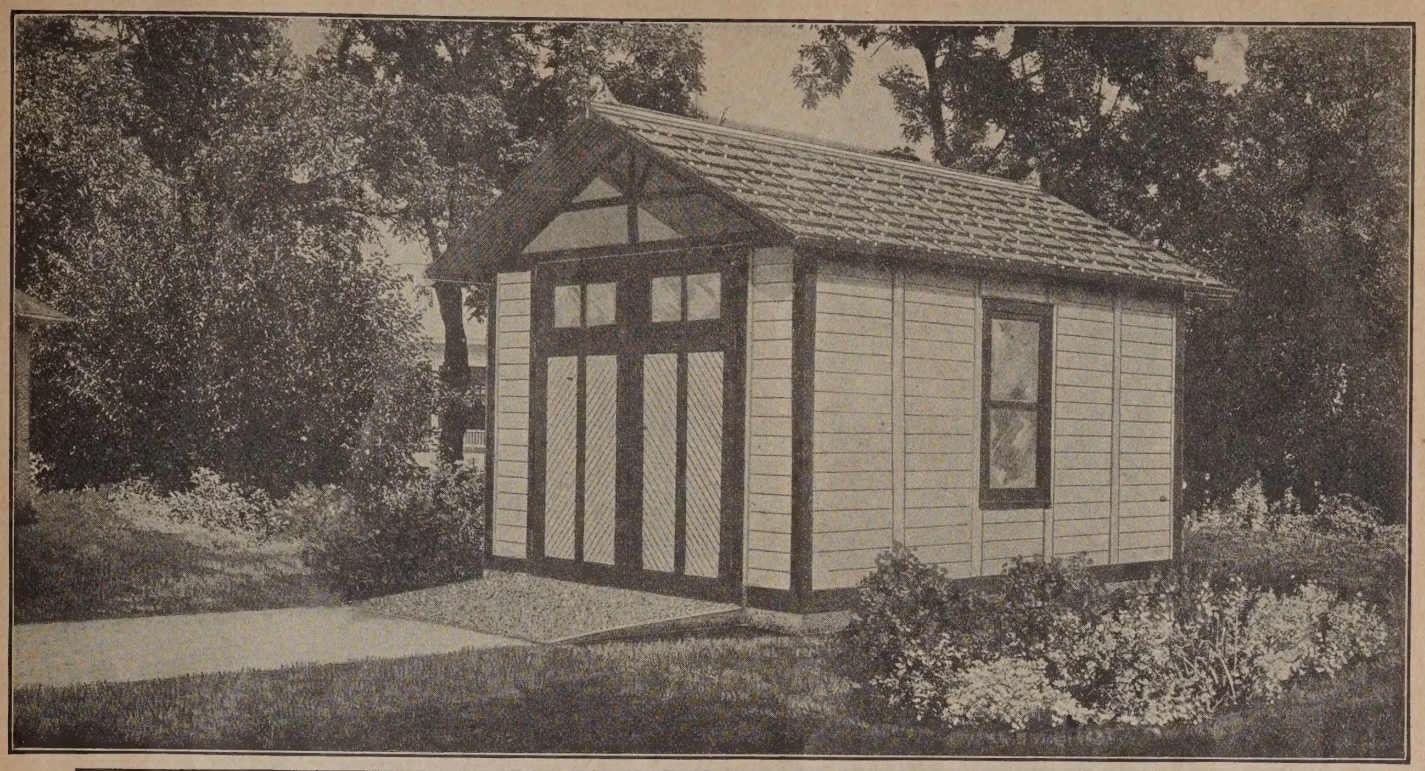

The PARKWAY

Ready Made Frame Garage 55C17 Price, $264.00

Little more than a year's garage rent will pay for Simplex Garage 55C17. This design has proved a winner and has been instrumental in selling others in every town where one has been used. You cannot beat it the world over at the price. Made of only the most select lumber, a far better grade than is used for ordinary building purposes.

If you are paying $10.00 to $15.00 a month for the care of your automobile in a public garage, you can easily see that our Ready Made Garage 55C17 will soon pay for itself.

Specifications for Ready Made Garage 55C17

SIZE—12 feet wide by 15 feet deep, inside.

DOUBLE DOORS—Opening, 8x8 feet. Two windows, glass size 24x26 inches, two lights glazed with clear glass.

FOUNDATION—Garage rests on 6-inch by 2-foot 6-inch cedar posts, which we furnish.

SILLS—Which rest on foundation posts, are 3x6-inch No. 1 yellow pine.

WALL SECTIONS—No. 1 yellow pine drop siding, ¾ inch thick, dressed and matched. Height of wall section, 8 feet.

ROOFING BOARDS—No. 1 yellow pine, ⅝ inch thick, dressed and beaded on the under side. In sections 3 feet wide.

WINDOW AND DOOR FRAMES—Good quality window and door frames.

ROOFING—Sea Green Fire-Chief Shingle Roll Slate Surfaced Roofing, guaranteed to wear and hold its color for seventeen years.

HARDWARE—All necessary hardware is furnished with the garage and is fitted in place.

PAINTING—Entire garage painted on the outside with one coat of gray paint.

FLOOR—When floor is ordered we furnish No. 1 yellow pine floor sections 13/16 inch thick, 2x6-inch joists, and steel joist hangers.

Catalog Number	Price	Shipping Weight, About	Foundation Dimensions	Wallboard for Lining	If Foundation Posts Are Omitted Deduct	Wood Floor	Weight, Floor
			Ft. In. Ft. In.				
55C17	**$264.00**	3,500 lbs.	12 3 x 15 3	$59.00	$5.00	$61.00	900 lbs.
55C17C	**303.00**	4,300 lbs.	12 3 x 18 3	66.00	5.50	68.00	1,170 lbs.

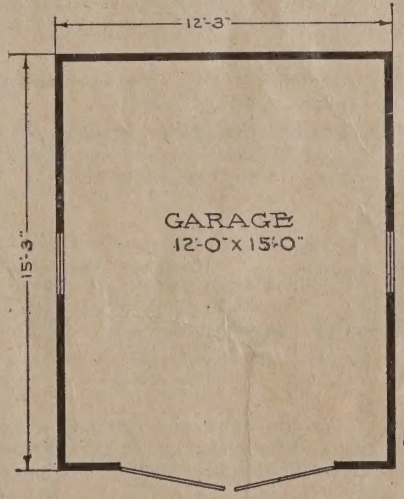

Garage shipped from factory in SOUTHERN ILLINOIS. Wall board shipped from factory in OHIO.

Brighton Station, Cincinnati, Ohio.

Sears, Roebuck and Co., Chicago, Ill.

Gentlemen:—The portable house bought in June, 1910, has been used as a garage and has proven satisfactory in every way. Two men erected it in one day and we have not had occasion to take it down since. Have been well satisfied with it and believe it to be as good in every way as any house I could have built for double the cost.

Very truly yours,
W. B. STEPHENS.

Many people are now buying Ready Made Garages on our Easy Payment Plan. Now is the time to secure yours, while we can make prompt shipment.

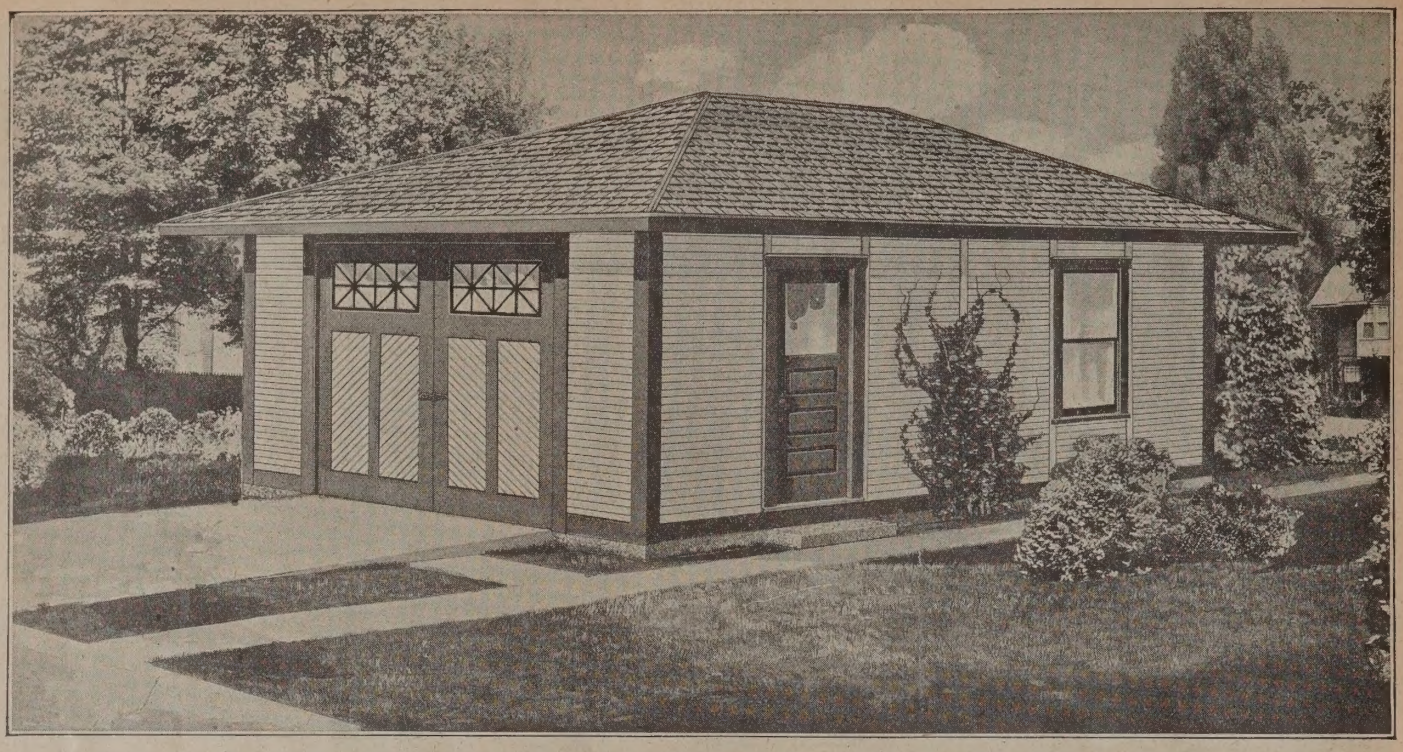

The AVENUE — **Ready Made Frame Garage 55C19 Price, $313.00**

This garage will pay for itself in about twelve months. The illustration gives a good general idea of this substantially built and nicely designed Simplex Garage. Note the massive doors, with fancy windows, and also the real Sea Green Fire-Chief Shingle Roll Slate Surfaced Roofing, which will last longer than shingles.

This garage can also be furnished for two, three or four cars. Each extra addition is equipped with double doors like illustrated above and the price for each addition is quoted below.

Specifications for Ready Made Frame Garage 55C19

SIZE—(INSIDE) 12 feet wide by 15 feet or 18 feet deep.

DOUBLE DOORS—Opening, 8x8 feet. Three glazed windows, glass size 24x26 inches. Opening size of windows, 2 feet 4⅛ inches by 4 feet 10 inches. One glazed door, size 2 feet 6 inches by 6 feet 6 inches, 1⅜ inches thick. Double doors are glazed having divided lights, as shown in illustration.

FOUNDATION—Garage rests on 6-inch by 2-foot 6-inch cedar posts, which we furnish.

SILLS—Which rest on foundation posts, are 3x6-inch No. 1 yellow pine.

WALL SECTIONS—No. 1 yellow pine drop siding. Height of walls, 8 feet.

ROOFING BOARDS—Made of No. 1 yellow pine, ⅝ inch thick, dressed and beaded on the under side. In sections 3 feet wide.

FLOOR—When floor is ordered we furnish No. 1 yellow pine floor sections 13-16-inch thick, 2x6-inch joists, and steel joist hangers.

WINDOW AND DOOR FRAMES—Good quality window and door frames.

ROOFING—Sea Green Fire-Chief Shingle Roll Slate Surfaced Roofing, guaranteed to wear and hold its color seventeen years.

HARDWARE—All necessary hardware furnished with garage and is fitted in place.

PAINTING—Entire garage painted on the outside with one coat of gray paint.

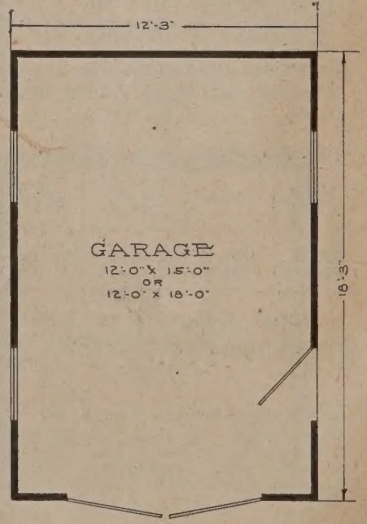

Garage shipped from factory in SOUTHERN ILLINOIS. Wall board shipped from factory in OHIO.

Catalog No.	Price	Shipping Weight, About	Foundation Dimensions Ft. In. Ft. In.	Wall Board for Lining	If Foundation Posts Are Omitted Deduct	Wood Floor	Weight, Floor	Each Additional 9-Ft. Stall
55C19	**$313.00**	3,600 lbs.	12 x 3 x 15 x 3	**$58.00**	**$5.00**	**$59.00**	900 lbs.	**$126.00**
55C19C	**350.00**	4,400 lbs.	12 x 3 x 18 x 3	**63.00**	**5.50**	**67.00**	1,170 lbs.	**136.00**

Do you know you can buy a Ready Made Garage on Easy Payments? **You can** and the terms are so **very easy** you should not put it off another day. Use the Order Blank in back of this book.

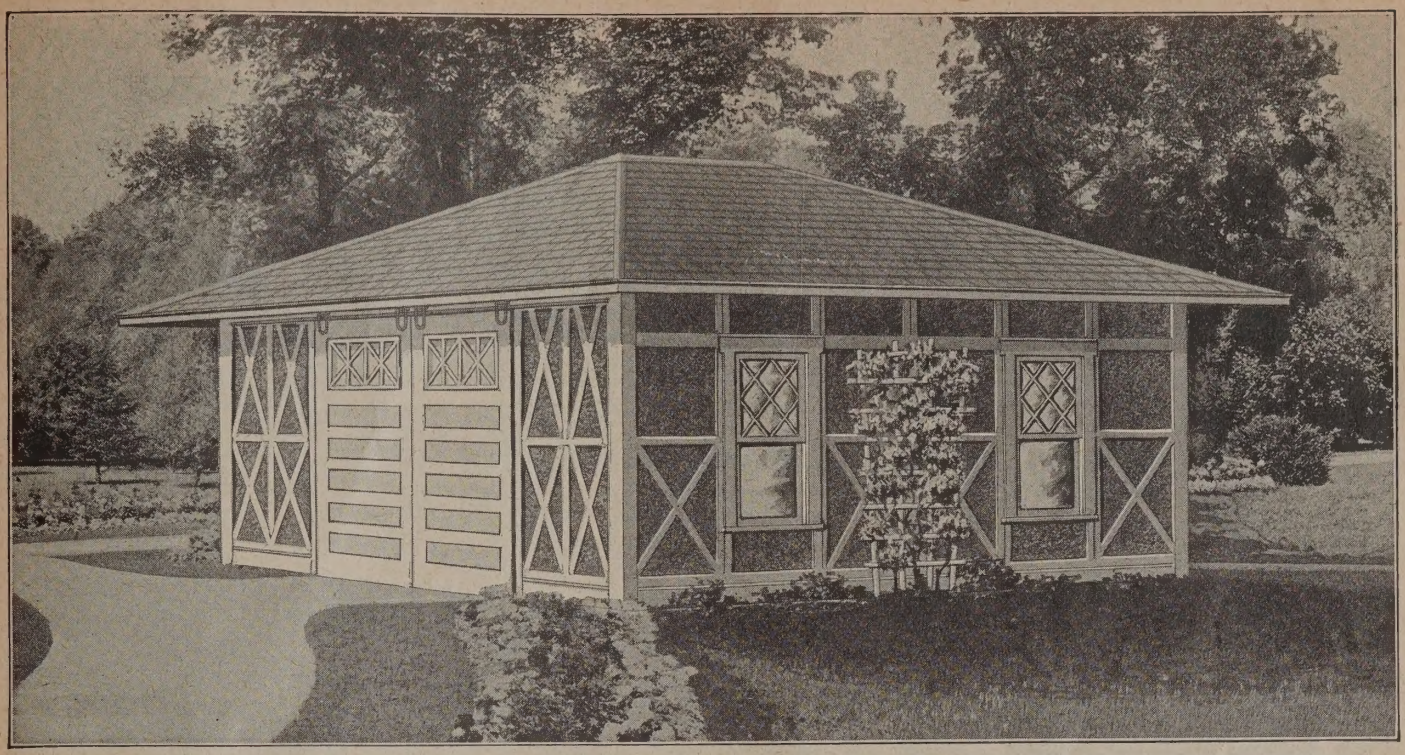

The MANOR

Ready Made Frame Garage 55C110 Price, $461.00

This garage will pay for itself in a short time. Our Simplex Garage 55C110 is substantially built of only high grade material for permanent and satisfactory service; it is worth much more than we ask; it is roofed with Sea Green Fire-Chief Shingle Roll Slate Surfaced Roofing. The sides are made of tongued and grooved lumber covered on the outside with Oriental Slate Surfaced Roofing guaranteed to wear and retain its color for seventeen years. This construction is a protection against fire, makes the garage warmer in the Winter, cooler in the Summer and greatly reduces the cost of up-keep, as slate surfaced siding needs no painting. This garage can also be furnished for two, three or four cars. Each extra addition is equipped with double doors like illustrated above and the price for each addition is quoted below.

Specifications for Ready Made Frame Garage 55C110

SIZE INSIDE—15 feet wide by 18 feet deep.

DOUBLE DOORS—Opening, 8x8 feet. Five Queen Anne glazed windows, glass size 24x26 inches, opening size 2 feet 4⅛ inches wide by 4 feet 10 inches long. One glazed door, size 2 feet 6 inches by 6 feet 6 inches, 1⅜ inches thick, for entrance from your house. Double doors are glazed with divided lights to match windows.

FOUNDATION—Garage rests on 6-inch by 2-foot 6-inch cedar posts, which we furnish.

SILLS—Which rest on posts are 3x6-inch dressed No. 1 yellow pine. Joists, 2x6 inches.

WALL SECTIONS—Sheathed with No. 1 yellow pine dressed siding, beaded on the inside. Sheathing is covered with Oriental Sea Green Slate Surfaced Roofing, which is guaranteed to wear at least seventeen years and retain its color. Height of walls, 8 feet.

ROOFING BOARDS—Made of No. 1 yellow pine, ⅝ inch thick, dressed and beaded on the under side. In sections 3 feet wide.

WINDOW AND DOOR FRAMES—Good grade window and door frames.

ROOFING—Sea Green Fire-Chief Shingle Roll Slate Surfaced Roofing, guaranteed to wear at least seventeen years without leaking or changing color.

FLOOR—When floor is ordered we furnish No. 1 yellow pine floor sections 13/16 inch thick, 2x6-inch joists, and steel joist hangers.

HARDWARE—All necessary hardware is furnished with garage and is fitted in place.

PAINTING—All exterior woodwork is furnished with one coat of gray paint.

Brighton Station, Cincinnati, Ohio.

Sears, Roebuck and Co., Chicago, Ill.

Gentlemen:—The portable house bought in June, 1910, has been used as a garage and has proved satisfactory in every way. Two men erected it in one day and we have not had occasion to take it down since. Have been well satisfied with it and believe it to be as good in every way as any house I could have built for double the cost.

Very truly yours,
W. B. STEPHENS.

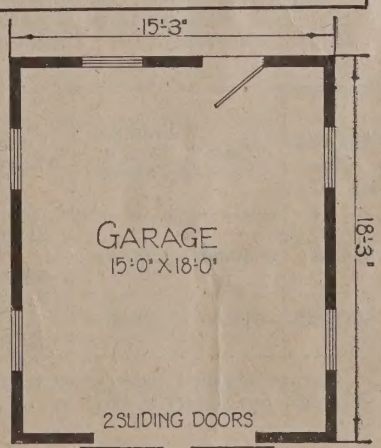

Catalog No.	Price	Shpg. Wt., About, Lbs.	Foundation Dimensions		Wall Board for Lining	If Foundation Posts Are Omitted, Deduct	Wood Floor	Wt., Floor	Each Addl. 9-Foot Section
			Ft. In.	Ft. In.					
55C110	**$461.00**	5,200	15	3 x 18 3	$73.00	$6.00	$ 79.00	1,170	$164.00
55C110C	**502.00**	6,100	15	3 x 21 3	79.00	6.00	100.00	1,470	171.00

Garage shipped from factory in SOUTHERN ILLINOIS. Wall board shipped from factory in OHIO.

AVERY LIBRARY
COLUMBIA UNIVERSITY

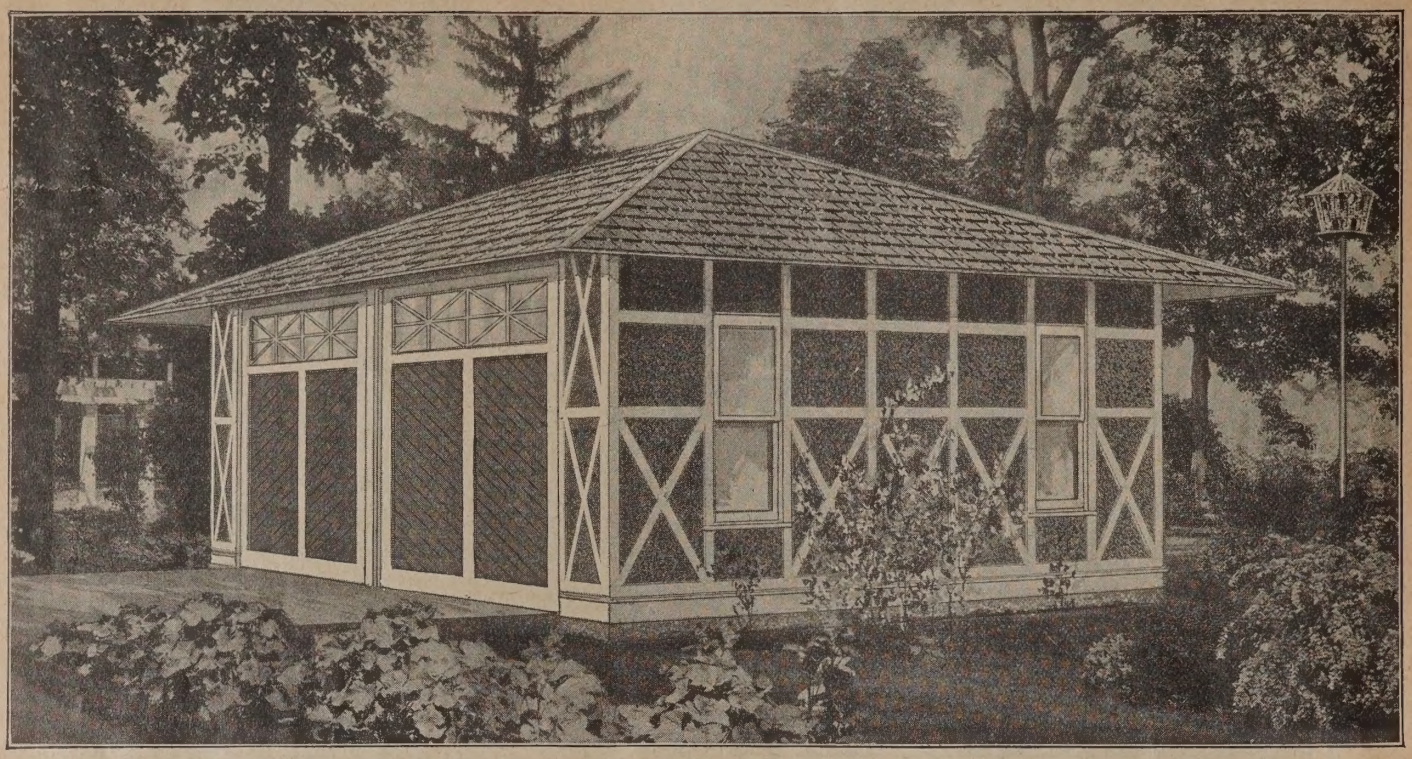

The SPEEDWAY

Ready Made Frame Garage 55C18 Price, $540.00

Low cost of upkeep is the big feature in the SPEEDWAY garage. It has double wall construction; the inner layer is tongue and groove material and the outer layer is Oriental Green Slate Surfaced Roofing, which is guaranteed to wear seventeen years and retain its color. You effect a large saving in upkeep by purchasing a garage like the SPEEDWAY, as it is not necessary to paint the walls of the garage. The exterior walls are also made very attractive by the panelling. This also strengthens the sections, making a rigid and substantial garage.

This garage can also be furnished for three or four cars. Each extra addition is equipped with double doors like illustrated above and the price for each addition is quoted below.

Specifications for Ready Made Double Garage 55C18

SIZE INSIDE—21 feet wide by 18 feet deep.

SLIDING DOORS—Each door, 8x8 feet. Sliding doors are glazed Queen Anne style; five windows, glass size 24x26 inches, opening size 2 feet 4⅛ inches by 4 feet 10 inches. One glazed door, 2 feet 6 inches by 6 feet 6 inches, 1⅜ inches thick.

FOUNDATION—Garage rests on 6-inch by 2-foot 6-inch cedar posts, which we furnish.

SILLS—Which rest on posts, are 3x6 inch No. 1 yellow pine.

WALL SECTIONS—Sheathed with No. 1 yellow pine, dressed on the inside. Sheathing is covered with Oriental Sea Green Slate Surfaced Roofing, which is guaranteed to wear seventeen years. Height of walls, 8 feet.

ROOFING BOARDS—Made of No. 1 yellow pine, ⅝ inch thick, dressed and beaded on the under side, in sections 3 feet wide.

WINDOW AND DOOR FRAMES—Good quality window and door frames.

ROOFING—Sea Green Fire-Chief Shingle Roll Slate Surfaced Roofing, guaranteed to wear seventeen years.

HARDWARE—All necessary hardware is furnished with garage and is fitted in place.

PAINTING—Woodwork painted on the outside with one coat of gray paint.

Catalog No.	Price	Shipping Weight, About	Foundation Dimensions	Wall Board for Lining	If Foundation Posts Are Omitted, Deduct	Each Additional 9-Foot Section
55C18	**$540.00**	6,200 lbs.	21 ft. 3 in. by 18 ft. 3 in.	$ 90.00	$6.00	$164.00
55C18C	**611.00**	7,200 lbs.	21 ft. 3 in. by 21 ft. 3 in.	103.00	6.00	171.00

Garage shipped from factory in SOUTHERN ILLINOIS. Wall board shipped from factory in OHIO.

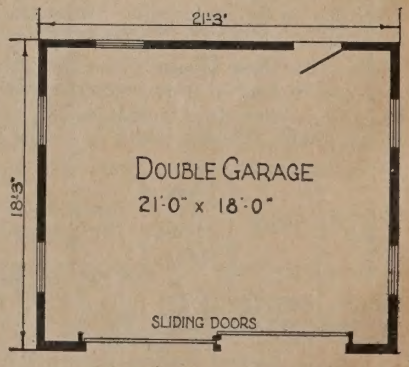

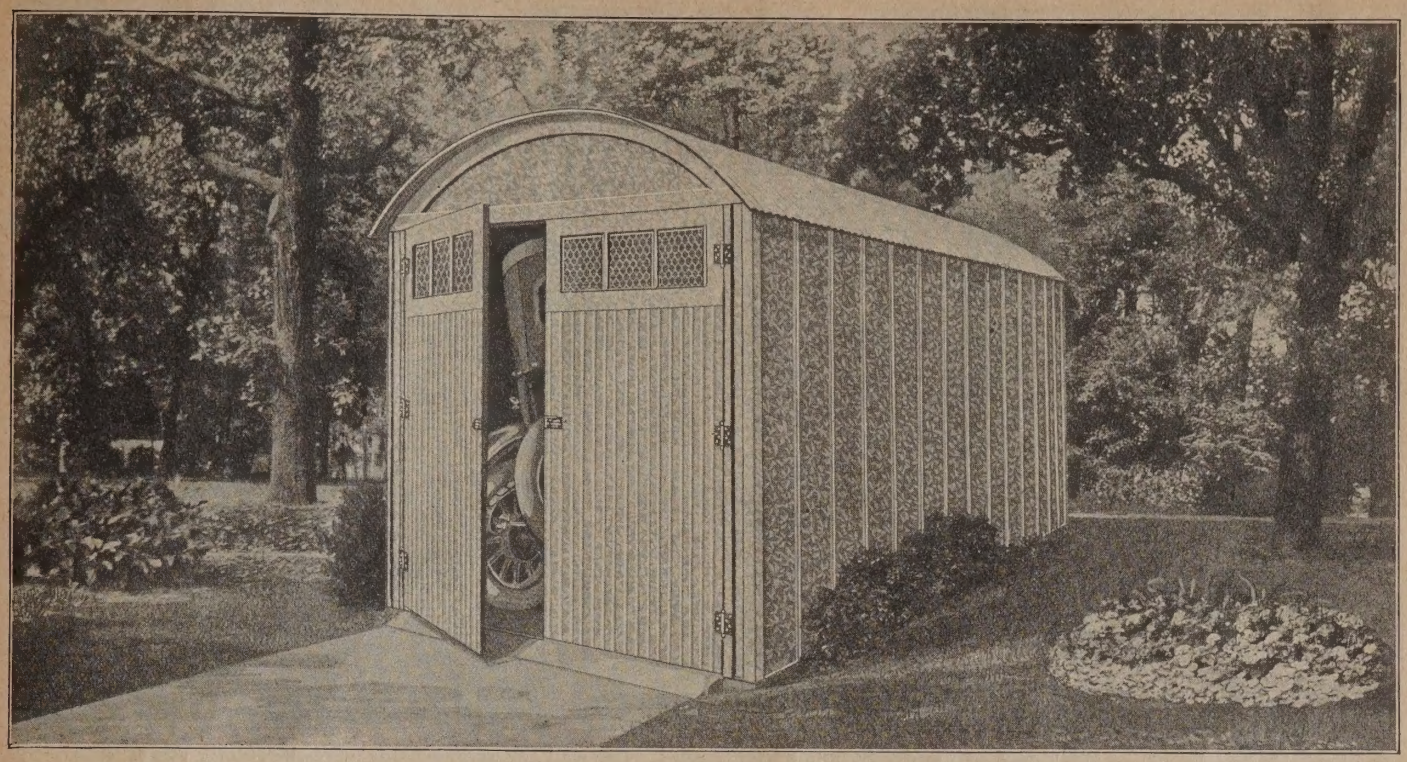

The MONITOR Ready Made Fireproof Steel Garage 55C193 Price, **$144.00 and Up**

All steel garage. Guaranteed new "open-hearth" steel No. 26-gauge, heavily galvanized. Fireproof, stormproof, rustproof. Practically indestructible. Easy to put up. Simple construction, interchangeable parts. Bolted joints and uniform sections. No experts needed. One of the biggest bargains we have ever offered. Complete instructions furnished. Saves time, worry and expense.

High Grade All Steel Garages. Especially recommended for fireproof quality, service, reliability and low cost.

In order to make this $144.00 price on a garage, originally intended to sell for a great deal more, these buildings are made in tremendous quantities with steel that was purchased from the big rolling mills when the cost was low.

Simplex Fireproof Garages are substantially constructed of materials which will give perfect satisfaction. By curving the corrugated roof sections they are given greater supporting power than in the usual type of steel garages. This shape of roof also adds to the attractive appearance of the building, making it one of the neatest designs on the market.

You cannot afford to do without a garage when we offer them at such low prices. By saving you the annoyance and expense of storing your car in a public garage these private auto shelters will pay for themselves in a few months.

Specifications for Portable All Steel Fireproof Garage 55C193

SIZE—Inside measurements, 9 feet 4¾ inches by 12 feet 8¾ inches. Other sizes quoted below. Height of all garages, 8 feet to eaves and 10 feet to top of roof.

DOUBLE DOORS—Size of opening, 8x8 feet. Hinged double doors made of 26-gauge galvanized sheet steel, glazed at the top with wire reinforced glass.

WALLS—Wall sections made up of 26-gauge galvanized sheet steel. Size of sections, 2 feet 6 inches by 8 feet; at the base they fasten to angle iron sills. At the top they bolt to a heavy steel wall plate.

ROOF—Sections of roof are curved to give greater strength. Made of 24-gauge corrugated galvanized steel, two gauges heavier metal than in the side walls. Sections fasten to heavy galvanized steel wall plates by bolts. Three 14-gauge solid steel braces are provided in each of the four corners, which make the corners of the garage very rigid. The center brace in each corner also **serves as a shelf** which is very handy for your tools, oil can, etc.

HARDWARE—All necessary hardware furnished for erecting the garage, including hinges, hasp, bolts and screws.

55C193—Simplex Fireproof Garage, as illustrated and described. Size, 9 feet 4¾ inches by 12 feet 8¾ inches. Shipping weight, 1,100 pounds. Price..... **$144.00**

55C194—Simplex Fireproof Garage, same as 55C193, but size is 9 feet 4¾ inches by 15 feet 2¾ inches. Shipping weight, 1,215 pounds. Price..... **$176.00**

55C195—Simplex Fireproof Garage, same as 55C193, but size is 9 feet 4¾ inches by 17 feet 8¾ inches. Shipping weight, 1,325 pounds. Price..... **$191.00**

55C196—Simplex Fireproof Garage, same as 55C193, but size is 9 feet 4¾ inches by 20 feet 2¾ inches. Shipping weight, 1,440 pounds. Price..... **$194.00**

The above prices do not include floor, as fireproof garages should have concrete, cinder or gravel floors.

The glazed doors give sufficient light for ordinary purposes, but if extra windows are required in side or rear walls they can be furnished at $7.00 each, including steel frame, hinged at top and glazed with wire reinforced glass 16x20 inches. A side door 2 feet by 6 feet, complete with hardware, can be furnished with the garage for $16.50 extra.

All steel garages are shipped from the factory in OHIO.

NOTE—We can quote prices on small galvanized steel buildings for use as motorcycle garages, tool houses, powder houses, flag stations, hunters' cabins, telephone booths, contractors' shacks, patrol boxes, storage sheds, etc. Write for prices and description if interested.

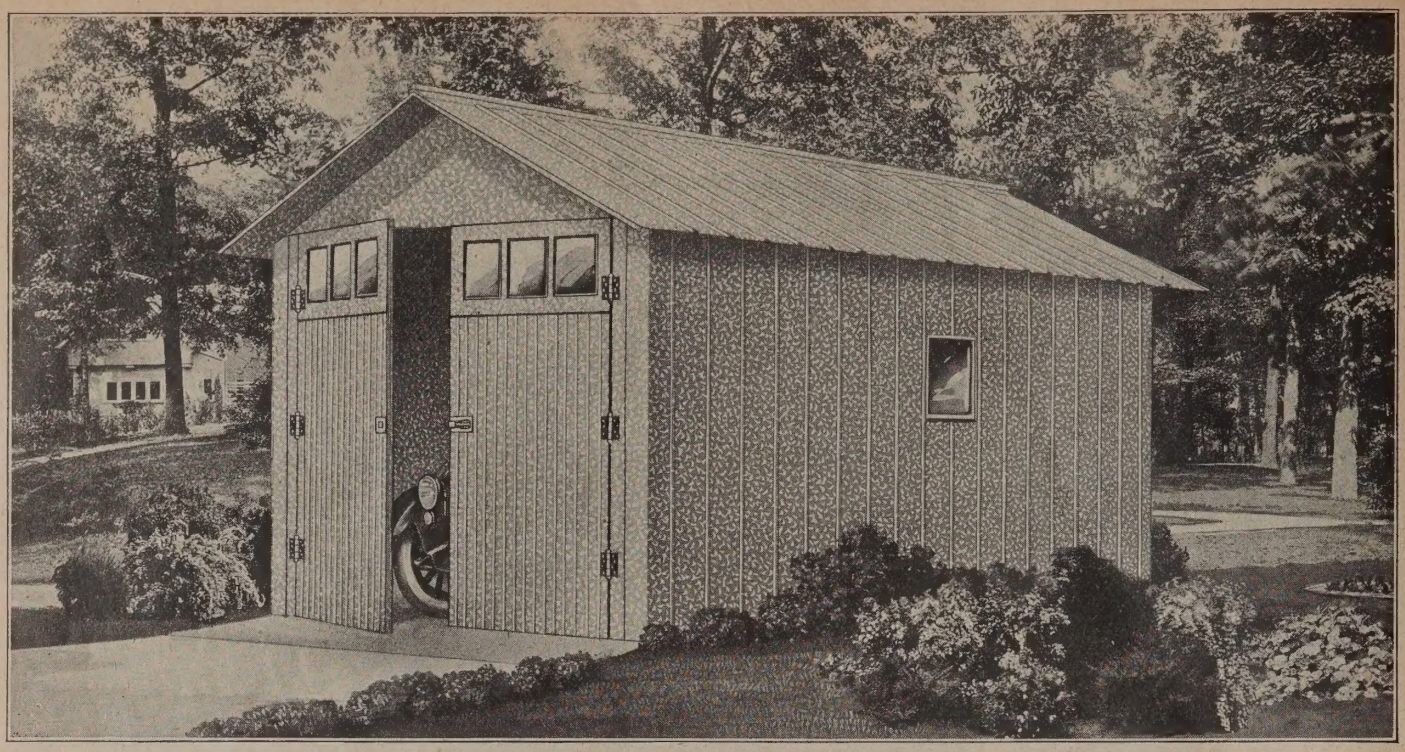

This Steel Garage has a gable roof supported by angle iron trusses. The wall and roof sections are bolted to the heavy galvanized steel plate, making a perfectly tight joint. No soldering, riveting or machine work of any kind is necessary. All parts come to you cut to the proper size, with all bolt holes bored and bolts furnished ready for easy assembling. There are three 14-gauge solid steel braces provided in each of the four corners which make the corners of the garage very rigid. The center brace in each corner also SERVES AS A SHELF, which is very handy for your tools, oil can, etc.

The MERRIMAC **Strong and Rigid Galvanized Steel Garage 55C197.** **$168.00 AND UP**

Specifications for Portable All Steel Fireproof Garage 55C197

SIZE—Measurements, 10 feet 2¾ inches by 12 feet 8¾ inches. Other sizes quoted below. Height of garage, 8 feet to eaves and 11 feet to ridge of roof.

DOUBLE DOORS—Size of opening, 8x8 feet. Hinged double doors made of 26-gauge galvanized sheet steel, stoutly braced.

WALLS—Wall sections made of 26-gauge galvanized sheet steel. Size of sections, 2 feet 6 inches by 8 feet. At the base the sections fasten to angle iron sills; at the top they bolt to heavy galvanized wall plates.

ROOF—Roof sections made of 26-gauge galvanized sheet steel which overlap and bolt together making a good weather tight joint. A metal cap is furnished to cover the ends of the roof sections where they meet at the ridge.

HARDWARE—All necessary hardware furnished, including hinges, latches, bolts, clips and screws.

WINDOWS—Two windows furnished, one on each side; fireproof window frames and sash made of 26-gauge galvanized steel glazed with wire reinforced glass; sash hinged to frame at top. Shipped from factory in OHIO.

Prices of All Steel Fireproof Garages.

55C197—Simplex Fireproof Garage. Size, 10 feet 2¾ inches by 12 feet 8¾ inches. Shipping weight, 1,350 pounds. Price..... **$168.00**

55C198—Simplex Fireproof Garage. Size, 10 feet 2¾ inches by 15 feet 2¾ inches. Shipping weight, 1,500 pounds. Price..... **$188.00**

55C199—Simplex Fireproof Garage. Size, 10 feet 2¾ inches by 17 feet 8¾ inches. Shipping weight, 1,650 pounds. Price..... **$211.00**

55C200—Simplex Fireproof Garage. Size, 10 feet 2¾ inches by 20 feet 2¾ inches. Shipping weight, 1,800 pounds. Price..... **$235.00**

55C201—Simplex Fireproof Garage. Size, 11 feet 11 inches by 12 feet 8¾ inches. Shipping weight, 1,475 pounds. Price..... **$178.00**

55C202—Simplex Fireproof Garage. Size, 11 feet 11 inches by 15 feet 2¾ inches. Shipping weight, 1,675 pounds. Price..... **$215.00**

55C203—Simplex Fireproof Garage. Size, 11 feet 11 inches by 17 feet 8¾ inches. Shipping weight, 1,875 pounds. Price..... **$244.00**

55C204—Simplex Fireproof Garage. Size, 11 feet 11 inches by 20 feet 2¾ inches. Shipping weight, 2,075 pounds. Price..... **$299.00**

The above prices do not include floors, since fireproof garages should have concrete or gravel floors. We do not furnish concrete materials. If extra windows are required in the side or rear walls they can be furnished at $7.00 each, including steel frame glazed with wire reinforced glass 16x20 inches. Side door, 2x6 feet, complete with hardware, can be furnished with the garage at $16.50 extra. The double doors are glazed at the top with wire reinforced glass.

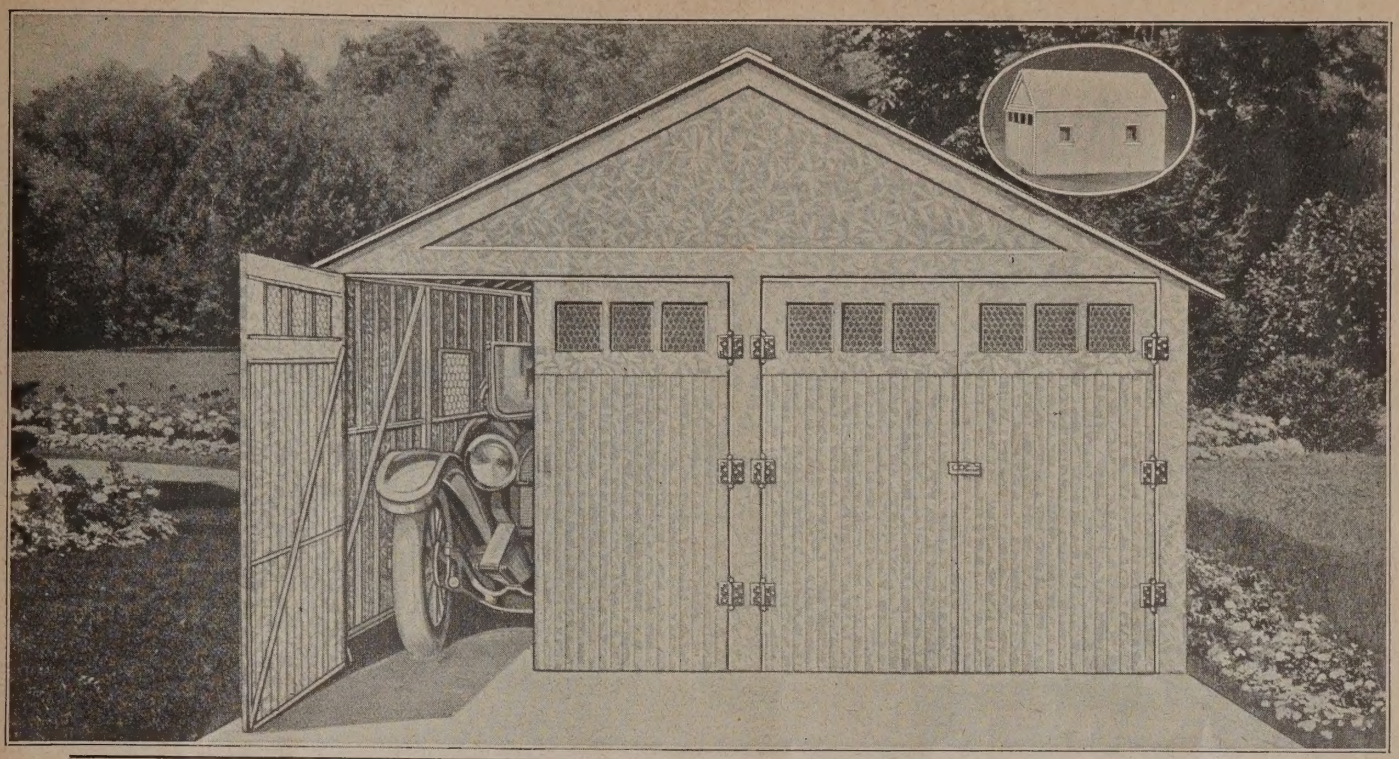

The IRONSIDES

Ready Made Steel Double Garage. 55C159—Price, $448.00 And Up

Size, 18 feet 6 inches wide by 15 feet 2 inches deep. Shipping weight, 2,280 pounds. Price.....**$448.00**

Size, 18 feet 6 inches wide by 17 feet 8 inches deep. Shipping weight, 2,520 pounds. Price.....**$524.00**

Size, 20 feet 2 inches wide by 15 feet 2 inches deep. Shipping weight, 2,720 pounds. Price.....**$487.00**

Size, 20 feet 2 inches wide by 17 feet 8 inches deep. Shipping weight, 2,900 pounds. Price.....**$575.00**

Size, 20 feet 2 inches wide by 20 feet 2 inches deep. Shipping weight, 3,050 pounds. Price.....**$648.00**

Size, 23 feet 6 inches wide by 15 feet 2 inches deep. Shipping weight, 3,000 pounds. Price.....**$569.00**

Size, 23 feet 6 inches wide by 17 feet 8 inches deep. Shipping weight, 3,200 pounds. Price.....**$666.00**

Size, 23 feet 6 inches wide by 20 feet 2 inches deep. Shipping weight, 3,550 pounds. Price.....**$769.00**

Prices include two sets glazed double doors, two windows and one rear entrance door. Extra windows may be furnished at $7.00 each, including steel frame hinged at top and glazed with wire reinforced glass. Extra steel doors, 2x6 feet, with hinges and latch, can be furnished at $16.50. If fewer windows are preferred, deduct $7.00 for each window omitted; deduct $16.50 if rear 2x6-foot door is not wanted. Floors not included, as fireproof garages should have concrete or gravel floors.

All Steel Double Garage for Two Cars

Our Galvanized Steel Double Garages are guaranteed to give perfect satisfaction, and therefore high grade materials are used throughout—heavily galvanized 26-gauge steel for roof and sides, rolled steel angles for the framework, wire reinforced glass for doors and windows, sturdy double doors in well braced frames. These fireproof, windproof, rustproof buildings represent exceptional bargains at our remarkably low prices.

They are very easy to erect. No riveting, soldering or machine work of any kind is necessary. Sections bolt together, making stormproof joints. The steel angles are cut to exact size, bored with bolt holes and furnished with bolts. Many of the sections and framing parts are interchangeable, thus simplifying the work of erecting.

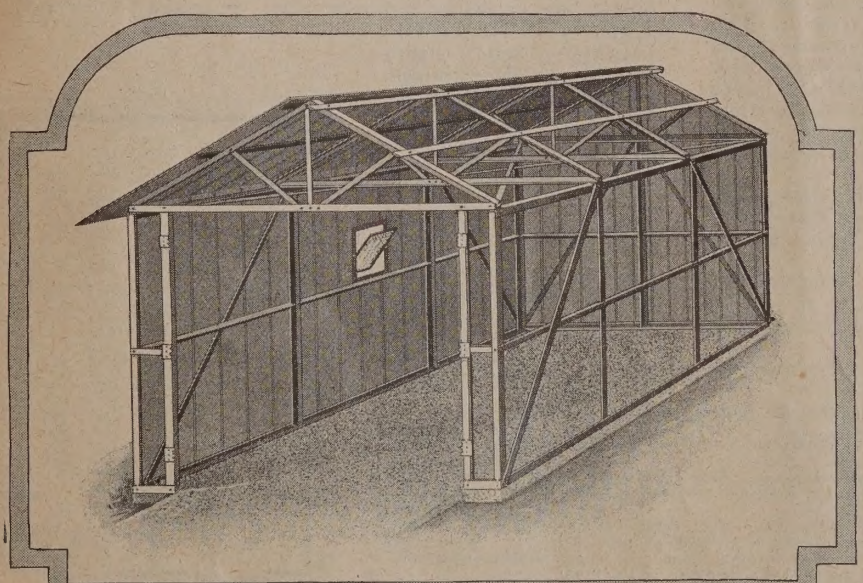

THIS PICTURE CLEARLY ILLUSTRATES THE ANGLE IRON FRAME OF THE TWO-CAR GARAGES.

We advise you to place your order without delay so as to take advantage of our present low quotations.

Specifications for Steel Garage 55C159

SIZE—Inside measurements, 18 feet 6 inches wide by 15 feet 6 inches deep. Other sizes quoted above. Height of walls, 8 feet to eaves and 12 feet to ridge of roof.

DOUBLE DOORS—Two pairs hinged double doors, glazed with wire reinforced glass.

WALLS—Wall sections, 2½ feet wide by 8 feet high. Sections have weatherproof joints formed by the rolled edges of the sheets.

ROOF—Roof sections have lap joints which bolt together; metal cap furnished for covering ridge.

FRAMEWORK—The sills, wall plates, stringers and uprights are 1½x1½x⅛-inch angle irons; the roof trusses and door frames are 1x1x⅛-inch angle irons; the diagonal braces are 1x⅛-inch steel bars. The roof purlins are 1½x⅛-inch steel bars.

WINDOWS AND DOORS—Four windows, two on each side, with steel frames pivoted at the center and glazed with wire reinforced glass, size, 16x20 inches. One rear entrance door 2x6 feet, complete with hinges and latch.

HARDWARE—All necessary hardware furnished, including hinges, latches, bolts, screws and clips. Shipped from factory in OHIO.

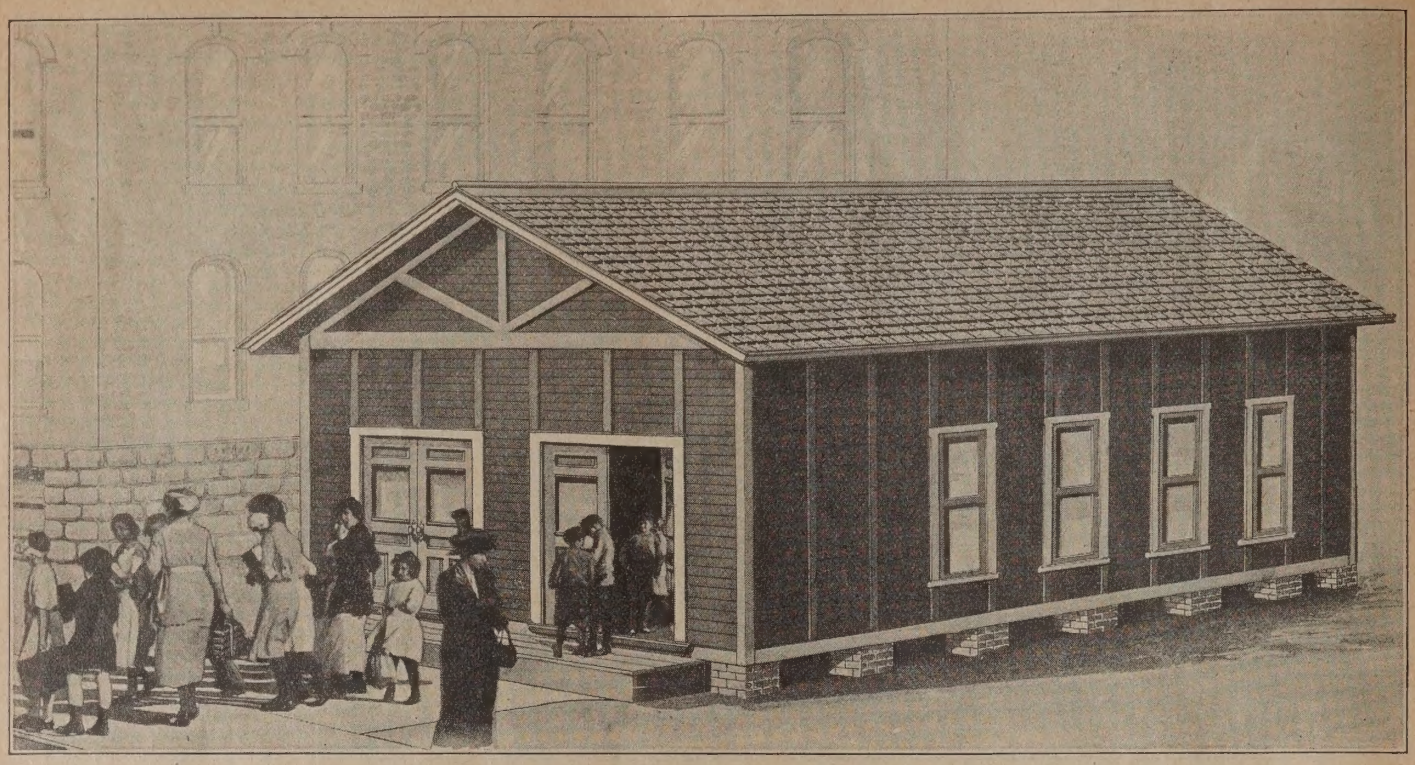

Ready Made Schoolhouse 55C137

This school building will seat forty-five pupils. The walls are 9 feet high, with correspondingly large windows, giving plenty of light and ventilation at all times. The boys' and girls' vestibules are separated by a 9-foot partition. Each vestibule has two sets of double doors, leading into the schoolroom and to the outside. There are 24 lineal feet of wall space in each vestibule, giving plenty of room for hanging coats and hats.

The class room has been arranged so that neither the teacher nor pupils will face the light, all illumination coming from the sides. The teacher sits at the back wall of the room facing the pupils, and the blackboards can be arranged along the front wall. There is also space for small blackboards between the side windows. Seats and blackboards are not included in the price of the schoolhouse.

Whenever new school departments are introduced, such as sewing or cooking courses, and manual training classes, it is necessary to have suitable accommodations immediately. For such purposes a Ready Made Building that can be put up quickly is a great advantage and does away with the expense and delay of constructing additions to the main school building.

Many large cities now own several Ready Made Schoolhouses and use them either in connection with the regular grades, or as kindergartens, Summer schools, or lecture halls.

Specifications for Ready Made Schoolhouse 55C137

SIZE OF SCHOOLHOUSE (INSIDE)—24 ft. wide by 36 ft. deep.

SCHOOLROOM—24 feet wide by 30 feet deep.

VESTIBULES—Two vestibules, each 12 feet wide by 6 feet deep; one for boys and one for girls.

WINDOWS AND DOORS—Eight glazed two-light windows, glass size, 24x36 inches, window opening size, 2 feet 4⅛ inches by 6 feet 6 inches. Two sets of vestibule doors at the entrance glazed with clear double strength glass; size of each door, 2 feet 6 inches by 6 feet 6 inches, 1⅜ inches thick. Double doors lead from each vestibule into the schoolroom. These doors have five panels; size, 2 feet 6 inches wide by 6 feet 6 inches high by 1⅜ inches thick.

FOUNDATION—We furnish with the schoolhouse cedar foundation posts 6 inches in diameter, 2 feet 6 inches long. Brick, stone or cement are not furnished.

SILLS—3x8-inch No. 1 yellow pine, which rest on foundation posts.

FLOOR JOISTS—2x8-inch No. 1 yellow pine, hung in patent steel stirrups.

FLOORING—$^{13}/_{16}$-inch thick by 3¼-inch face No. 1 yellow pine, dressed and matched.

WALL SECTIONS—No. 1 yellow pine drop siding ¾ inch thick, dressed smooth on the inside. Height of walls, 9 feet.

PARTITION WALLS—Made of No. 1 yellow pine, ⅝ inch thick, dressed and beaded, in sections 3 feet wide by 8 feet 10 inches high.

ROOFING BOARDS—Made of No. 1 yellow pine, ⅝ inch thick, dressed and beaded on the under side. In sections 3 feet wide.

WINDOW AND DOOR FRAMES—Good quality window and door frames. Doors and windows are fitted and hung.

ROOFING—Sea Green Fire-Chief Shingle Roll Slate Surfaced Roofing, guaranteed to wear and retain its color for seventeen years.

HARDWARE—All necessary hardware is furnished and fitted in place; a galvanized steel chimney is included.

PAINTING—Entire schoolhouse painted on the outside with one coat of gray paint.

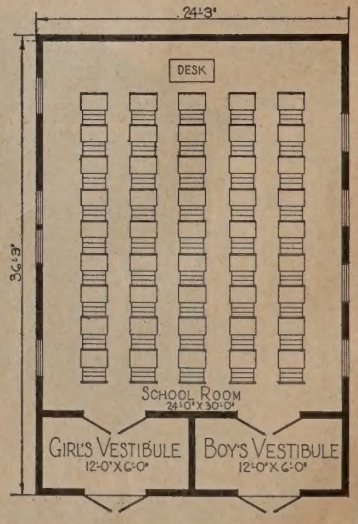

55C137—Simplex Ready Made Schoolhouse. Shipping weight, about 17,000 pounds. Price..... **$1,244.00**

55C137A—Simplex Ready Made Schoolhouse, with front platform 20x6 feet, with steps included. Shipping weight, about 18,000 pounds. Price..... **$1,260.00**

55C137B—Simplex Ready Made Schoolhouse. Size, 15x24 feet, single door, one window in front, four windows on each side and no inside partition. Shipping weight, about 7,000 pounds. Price..... **$517.00**

55C137C—Simplex Ready Made Schoolhouse. Size, 15x30 feet, single door, one window in front, four windows on each side. Shipping weight, about 8,500 pounds. Price..... **$531.00**

Peerless Wall Board (see page 53), plain brown finish, for lining and ceiling (**double wall construction**), 55C137, add $207.00; 55C137B, add $97.00; 55C137C, add $112.00.

Upper partitions extending to roof for 55C137, add $25.00.

If foundation posts are not wanted for 55C137, deduct $17.00.

If foundation posts are not wanted for 55C137B or 55C137C, deduct $8.00.

Price of wall board includes 2x4-inch ceiling joists, panel strips, baseboard, quarter round and nails. The wall board sheets are 3 feet wide and cut in proper lengths to fit ceiling, any window, door or plain wall section. Not a piece to cut.

Schoolhouses shipped from factory in SOUTHERN ILLINOIS. Wall board shipped from factory in OHIO.

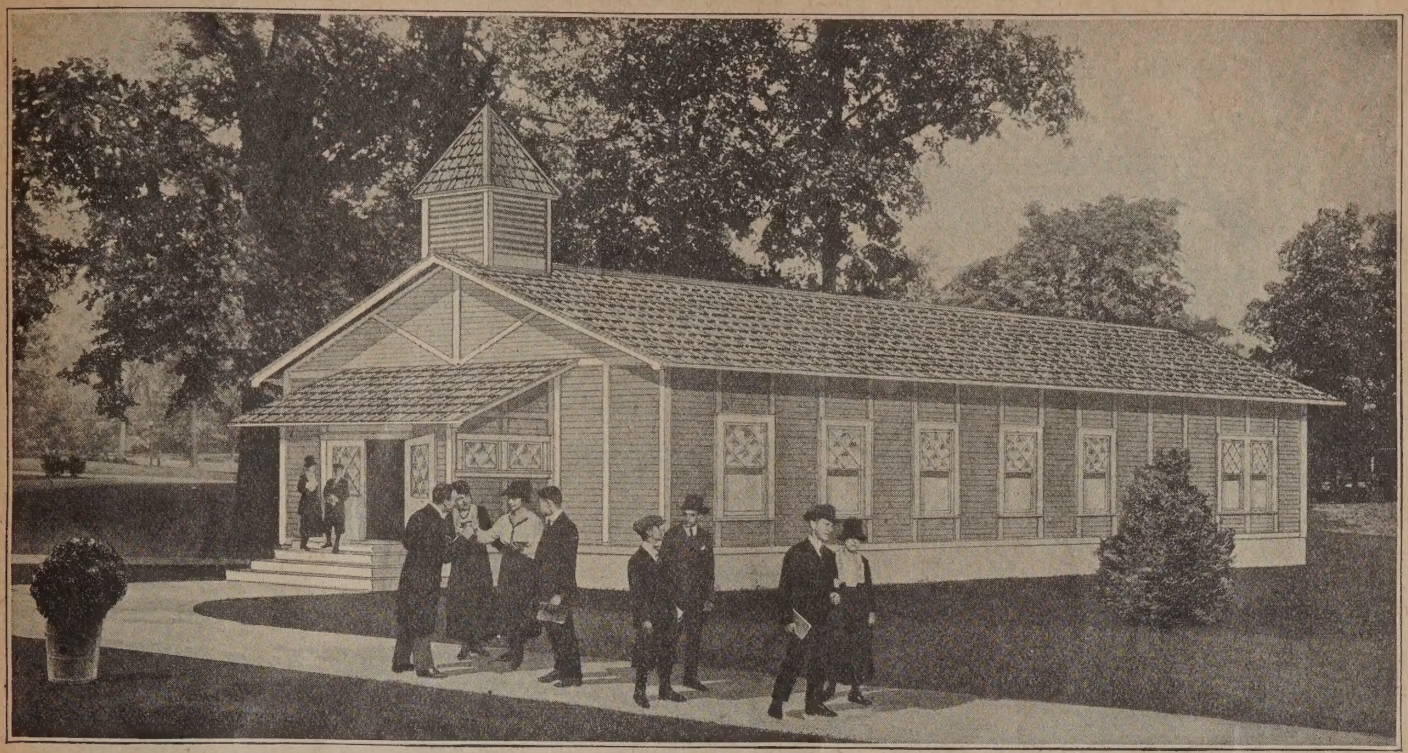

Ready Made Church 55C124

Our Simplex Ready Made Church 55C124 costs a great deal less than a similar structure built in the usual way. Consequently it is possible for congregations to provide themselves with a suitable meeting house at small expense, while if the church were built in the usual and more elaborate way the cost might be more than the community could afford. These buildings serve the purpose quite as well, being attractive, serviceable and conveniently arranged.

At church camp meetings held in the Summertime a Ready Made Building of this kind fills all requirements, as it can be put up or taken down at small expense. This makes it possible to economically move the church to new locations, so that when a permanent church is built this Ready Made Building can be made useful over and over again in other districts.

This building is also suitable for a town hall, lecture room, or as a place to hold banquets, entertainments or church fairs. Every town or village requires at least one building of this kind, and it can be most quickly provided by purchasing it READY MADE, avoiding the usual delay and expense of putting up a permanent structure. Steps not included, but prices will be furnished on request.

Specifications for Ready Made Church 55C124

SIZE OF CHURCH (INSIDE)—24 feet wide by 48 feet deep.

VESTIBULE—12 feet wide by 6 feet deep.

AUDITORIUM—24 feet wide by 36 feet deep.

SUNDAY SCHOOL ROOM—24 feet wide by 12 feet deep.

WINDOWS AND DOORS—Seventeen glazed two-light windows, top sash divided diamond shape; glass size, 24x36 inches; window opening size, 2 feet 4⅛ inches by 6 feet 6 inches. Four hinged single sash windows in vestibule. Entrance doors are double; size, 2 feet 6 inches by 6 feet 6 inches, 1⅜ inches thick. Double doors to vestibule and two doors leading to Sunday school room have five panels. All No. 1 quality. Rear door, 3 feet 6 inches wide by 6 feet 6 inches high by 1⅜ inches thick.

FOUNDATION—We furnish with the church cedar foundation posts 6 inches in diameter, 2 feet 6 inches long. Brick, stone or cement are not furnished.

SILLS—3x10-inch No. 1 yellow pine, which rest on the foundation posts.

FLOOR JOISTS—2x8-inch No. 1 yellow pine, hung in patent steel stirrups.

FLOORING—$^{13}/_{16}$ inch thick by 3¼-inch face No. 1 yellow pine, dressed and matched.

WALL SECTIONS—Made of No. 1 yellow pine drop siding, dressed smooth on the inside. Height of walls, 9 feet.

PARTITION WALLS—Made of No. 1 yellow pine, ⅝ inch thick, dressed and beaded, in sections 3 feet wide by 8 feet 10 inches high.

ROOFING BOARDS. Made of No. 1 yellow pine, ⅝ inch thick dressed and beaded on the under side. In sections 3 feet wide.

FRAMES—Good quality window and door frames. Doors and windows fitted and hung.

ROOFING—Sea Green Fire-Chief Shingle Roll Slate Surfaced Roofing guaranteed to wear and hold its color for seventeen years.

PAINTING—Outside of church painted one coat of gray paint.

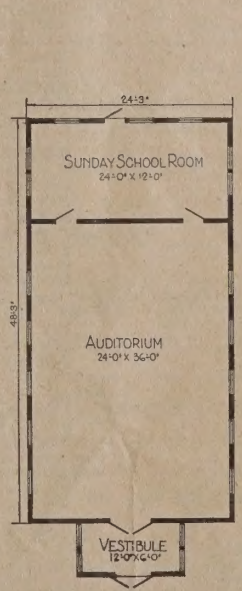

55C124—Simplex Ready Made Church. Shpg. wt., abt. 22,500 lbs. Price. **$1,954.00**

55C124B—Simplex Ready Made Church, without the partition between the auditorium and Sunday school room. Shipping wt., about 21,500 pounds. Price. **$1,923.00**

Peerless Wall Board (see page 53), plain brown finish, for lining and ceiling (**double wall construction**), 55C124, add $269.00; 55C124B, add $241.00.

Upper partitions extending to roof, add $25.00.

If foundation posts are not wanted, deduct $24.00.

Price of wall board includes 2x4-inch ceiling joists, panel strips, baseboard, quarter round and nails. The wall board sheets are 3 feet wide and cut in proper lengths to fit ceiling, any window, door or plain wall section. Not a piece to cut.

Church shipped from factory in SOUTHERN ILLINOIS. Wall board shipped from factory in OHIO.

Ready Made Chicken Houses

55C150

Interior view in right hand corner above shows style of Hennery Outfit included with our Canvas Front Poultry Houses, without extra charge. It is furnished complete with strong hinged roosts, roomy sliding nests 12 inches wide, 16 inches long, 6 inches deep, with platform entrance at rear; nests kept dark by hinged cover in front and large hinged drop board above.

All parts treated with vermin proof liquid and are removable to allow easy cleaning. Outfit made ready for use by attaching legs and roosts.

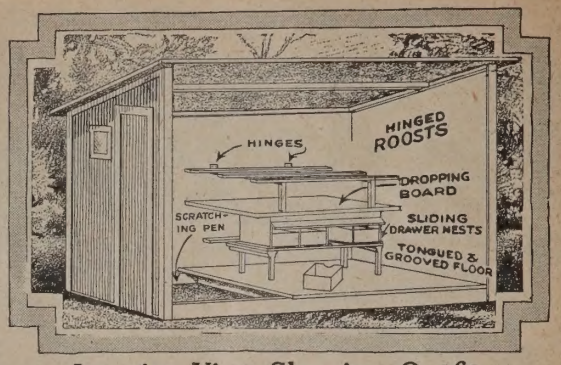

Interior View Showing Outfit.

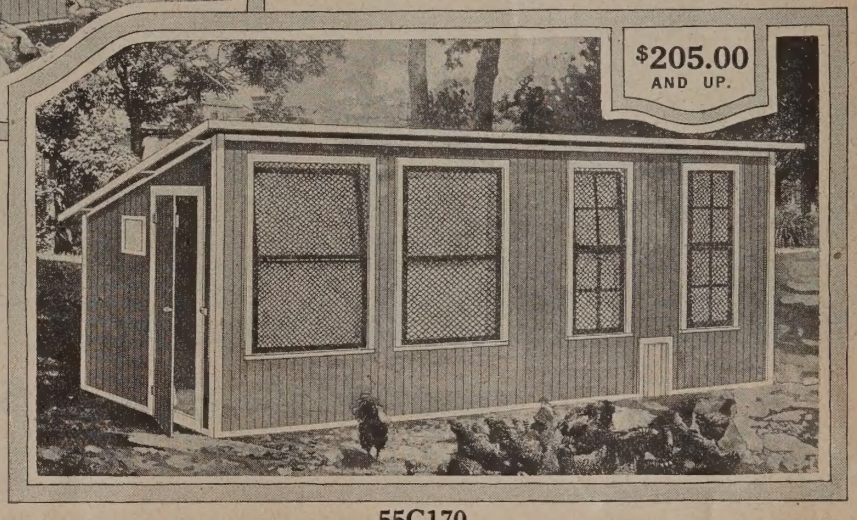

55C170

Specifications for Simplex Ready Made Chicken Houses 55C150 and 55C170

OPENINGS—Glazed windows, outside measurement 1 foot 8½ inches wide and 3 feet 10 inches high, eight lights, 8x10 inches. Upper sash opens inward, being hinged to lower sash which slides upward, so that the whole window may be removed. Fresh air windows, 3 feet 5 inches wide by 3 feet 10 inches high, with folding canvas frames adjustable to any weather condition. All windows protected with galvanized wire netting. One entrance door fitted with hinges and latch, 2 feet 4 inches wide by 5 feet 6 inches high. Small entrance door in front for chickens and ventilator door in end as shown.

WALLS—Made in sections of dressed and matched ¾-inch thick vertical siding.

ROOF—Dressed and matched ⅝-inch thick roof boards in sections; two-ply Best-of-all Roofing with nails and cement.

FLOOR—Dressed and matched 13/16-inch flooring made in sections, supported by 2x4's across the house.

PAINTING—Outside of building painted gray with white trim.

All necessary hardware furnished.

PRICES.

55C150—Simplex Ready Made Chicken House, one-compartment 10x8 feet. Complete Hennery Outfit for twenty chickens, consisting of three 5-foot perches, drop board and four nests. Shpg. wt., 1,200 lbs.
Price, without floor..... **$ 94.00**
Price, with half floor for roosting room only. Shipping weight, 1,500 pounds..... **101.00**

55C150A—Simplex Ready Made Chicken House, one-compartment 10x10 feet. Complete Hennery Outfit for twenty-four chickens, consisting of three 6-foot perches, drop board and five nests. Shpg.wt., 1,500 lbs.
Price, without floor..... **$103.00**
Price, with half floor for roosting room only. Shipping weight, 1,900 pounds..... **110.00**

55C150B—Simplex Ready Made Chicken House, one-compartment 10x12 feet. Complete Hennery Outfit for twenty-eight chickens, consisting of three 6-foot perches, drop board and five nests. Shpg.wt., 1,800 lbs.
Price, without floor..... **$111.00**
Price, with half floor for roosting room only. Shipping weight, 2,200 pounds..... **117.00**

55C150C—Simplex Ready Made Chicken House, one-compartment 10x14 feet. Complete Hennery Outfit for thirty chickens, consisting of three 8-foot perches, drop board and 7 nests. Shpg. wt., 2,100 lbs.
Price, without floor..... **$121.00**
Price, with half floor for roosting room only. Shipping weight, 2,600 pounds..... **128.00**

55C170—Simplex Ready Made Chicken House, 20 feet by 8 feet. Complete Hennery Outfit for forty chickens, consisting of three 10-foot perches, dropping board and nine nests. Shipping weight, 2,400 pounds.
Price, without floor..... **$205.00**
Price, with half floor for roosting space only. Shipping weight, 3,000 pounds..... **236.00**

55C170A—Simplex Ready Made Chicken House, 20 feet by 10 feet. Two complete Hennery Outfits, each with three 6-foot perches, dropping board and five nests, accommodating fifty chickens. Shipping weight, 3,000 pounds.
Price, without floor..... **$229.00**
Price, with half floor for roosting space only. Shipping weight, 3,800 pounds..... **263.00**

55C170B—Simplex Ready Made Chicken House, 20 feet by 12 feet. Two complete Hennery Outfits, each with two 10-foot perches, dropping board and nine nests, accommodating sixty chickens. Shipping weight, 3,600 pounds.
Price, without floor..... **$250.00**
Price, with half floor for roosting space only. Shipping weight, 4,500 pounds..... **297.00**

55C170C—Simplex Ready Made Chicken House, 20 feet by 14 feet. Two complete Hennery Outfits, each with three 8-foot perches, dropping board and seven nests, accommodating seventy chickens. Shipping weight, 3,900 pounds.
Price, without floor..... **$276.00**
Price, with half floor for roosting space only. Shipping weight, 5,300 pounds..... **343.00**

Shipped from our factory in SOUTHERN ILLINOIS.

READ THESE LETTERS.

Sears, Roebuck and Co., Chicago, Ill.
Gentlemen:—The chicken house I bought of you last year is fine. It is the best one in our vicinity. Respectfully yours,
HENRY VOGELER,
321 Chandler Ave., Roselle, N. J.

Sears, Roebuck and Co., Chicago, Ill.
Gentlemen:—I received the poultry house and brood coops last Saturday and am well pleased with them. I want you to rush me another order of the same kind of coops. Please send six of them at once. A lady was just in and she thought they were the greatest things she had ever seen. MME. CLAYTON,
Uniontown, Penn.

Ready Made Chicken Houses

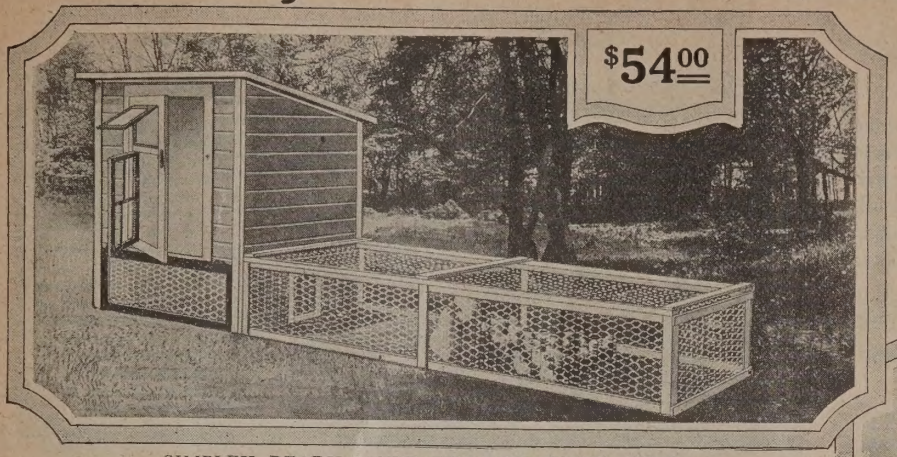

SIMPLEX READY MADE CHICKEN HOUSE 55C152.

Hennery Outfits included with our Simplex Ready Made Poultry Houses, without extra charge. They are furnished complete with strong hinged roosts, roomy sliding nests 12 inches wide, 16 inches long, 6 inches deep, with platform entrance at rear; nests kept dark by hinged cover in front and large hinged drop board above.

All parts treated with vermin proof liquid and are removable to allow easy cleaning. Outfit made ready for use by attaching legs and roosts. See opposite page.

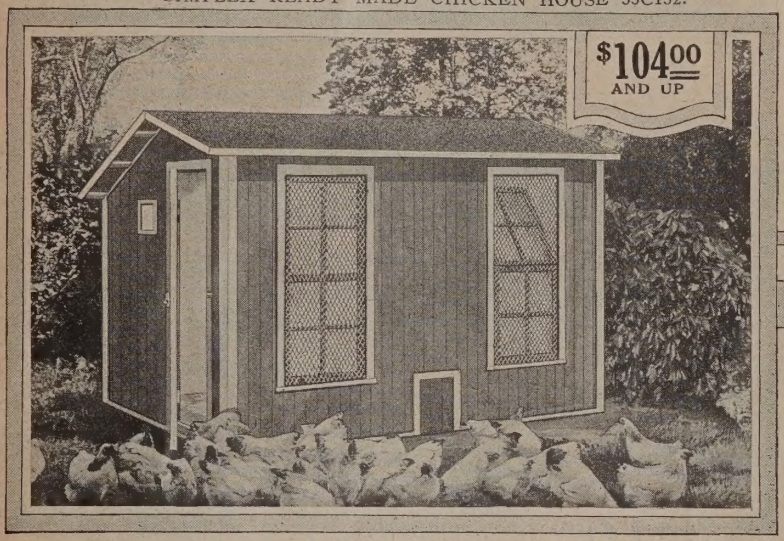

Simplex Ready Made Chicken House 55C153. Colony Poultry House.

This conveniently arranged colony house takes up little space and will accommodate 9 to 12 chickens. It is well constructed, completely equipped and will make a neat and inexpensive addition to any poultry outfit.

SPECIFICATIONS.

SIZE—6 feet by 6 feet; 7 feet high in front and 6 feet high in back.

OPENINGS—One glazed window in front, 8 lights 8x10 inches, 1 foot 8½ inches wide by 3 feet 10 inches high. Upper sash opens inward and downward, being hinged to the lower sash, which slides upward so that the whole window may be removed. Window protected with galvanized wire netting. One door at the side, size 2 feet 4 inches wide by 5 feet 6 inches high, furnished with hinges and latch. Small entrance door in front for chickens as shown.

WALLS—Dressed and matched ¾-inch thick yellow pine vertical V siding.

ROOF—Dressed and matched roof boards, yellow pine ⅝-inch thick. Two-ply Best-of-all roofing furnished with nails and cement.

FLOOR—Dressed and matched $1^{3}/_{16}$-inch thick flooring supported by 2x4's across the building.

PAINTING—Outside of building given one coat of gray paint with white trim.

OUTFIT—Complete hennery outfit for 10 hens, consisting of two 4-foot perches, drop board and three nests. (See page 47.) This house as arranged should face toward the south and has the entrance door on the west side. This door can be placed on the east end if ordered in this way.

55C153—Simplex Ready Made Chicken House, complete with hennery outfit and floor. Shipping weight, 860 pounds.
Price.....**$64.00**

55C153A—Simplex Ready Made Chicken House, same as 55C153, but without floor. Shipping weight, 760 pounds.
Price.....**$60.00**
Shipped from factory in SOUTHERN ILLINOIS.

Simplex Ready Made Chicken House 55C151. Gable Roof.

SPECIFICATIONS.

SIZE—10 feet wide by 8 feet deep, 6 feet 6 inches high in front, 5 feet 6 inches high in rear and 8 feet high at peak.

OPENINGS—Two glazed windows, eight lights 8x10 inches, 1 foot 8½ inches wide by 3 feet 10 inches high. The upper sash opens inward and downward, being hinged to lower sash, which slides upward so that the whole window can be removed. The windows are protected on the outside with galvanized wire netting. One door 2 feet 4 inches wide by 5 feet 6 inches high, fitted with hinges and latch. Small entrance door in front for chickens and ventilator door in end as shown.

WALLS—Made in sections of dressed and matched yellow pine vertical V siding ¾ inch thick.

ROOF—Dressed and matched ⅝-inch thick roof boards made in sections. Two-ply Best-of-all roofing furnished with nails and cement.

FLOOR—Dressed and matched $1^{3}/_{16}$-inch flooring in sections, supported by 2x4's across the house.

PAINTING—Outside of building painted gray with white trim.

55C151—Simplex Ready Made Chicken House, one-compartment 10x8 feet. Complete hennery outfit for 20 chickens, consisting of three 5-foot perches, drop board and four nests. Shipping weight, 1,200 pounds.
Price, without floor.....**$104.00**
Price, with complete floor. Shipping weight, 1,600 pounds.....**117.00**

55C151A—Simplex Ready Made Chicken House, one-compartment 10x10 feet. Complete hennery outfit for 24 chickens, consisting of three 6-foot perches, drop board and five nests. Shipping weight, 1,500 pounds.
Price, without floor.....**$115.00**
Price, with complete floor. Shipping weight, 2,000 pounds.....**130.00**

55C151B—Simplex Ready Made Chicken House, one-compartment 10x12 feet. Complete hennery outfit for 28 chickens, consisting of two 10-foot perches, drop board and nine nests. Shipping weight, 1,800 pounds.
Price, without floor.....**$127.00**
Price, with complete floor. Shipping weight, 2,300 pounds.....**145.00**

55C151C—Simplex Ready Made Chicken House, one-compartment 10x14 feet. Complete hennery outfit for 33 chickens, consisting of three 8-foot perches, drop board and seven nests. Shipping weight, 2,100 pounds.
Price, without floor.....**$140.00**
Price, with complete floor. Shipping weight, 2,700 pounds.....**157.00**
Shipped from factory in SOUTHERN ILLINOIS.

Two-Compartment Ready Made Chicken Houses.

Specifications and type of construction same as for 55C151, as illustrated, except that they are furnished with four windows in front, eight lights 8x10 inches; two entrance doors, one at each end; one ventilator at each end and small entrance door in front for chickens.

	Length	Depth	Capacity	Price, Without Floor	Price, With Half Floor	Price, Extra, for Partition
55C158	20 feet	8 feet	40 hens	**$223.00**	**$248.00**	**$19.00**
55C158A	20 feet	10 feet	50 hens	**240.00**	**279.00**	**22.00**
55C158B	20 feet	12 feet	60 hens	**265.00**	**313.00**	**26.00**
55C158C	20 feet	14 feet	70 hens	**292.00**	**361.00**	**28.00**

Complete with one hennery outfit at prices quoted. For prices of additional hennery outfits see page 47.

Shipping weights: 55C158, 2,400 pounds; 55C158A, 3,000 pounds; 55C158B, 3,600 pounds; 55C158C, 3,900 pounds.
Shipped from our factory in SOUTHERN ILLINOIS.

Simplex Ready Made Chicken House 55C152. Two-Story Laying House.

See illustration in left hand corner above.

A complete Poultry House and Runway for five to eight hens. In localities where the chickens have to be confined this style of building has become very popular.

The arrangement and equipment are well planned. A floor 18 inches above the ground divides the house into two stories, the upper furnished with nests, perches and drop board. The lower story is used as a scratching room. All parts are in sections and can be bolted together in a few minutes.

SPECIFICATIONS.

SIZE—5 feet wide by 4 feet deep; 6 feet high in front and 5 feet high in rear. Runway 4 feet wide, 10 feet long and 1 foot 8 inches high.

OPENINGS—One glazed door, 4 lights 8x10 inches; sash hinged to swing outward. Above the sash in door is a 10-inch canvas ventilator. The lower part of the front consists of a hinged frame, covered with 1-inch mesh poultry netting. Small entrance door on the side for chickens as shown.

WALLS—Dressed and matched yellow pine drop siding, ¾ inch thick, made in sections.

ROOF—Dressed and matched roof boards ⅝-inch thick, made in one hinged section, raising upward. Two-ply Best-of-all roofing furnished with nails and cement.

FLOOR—Dressed and matched $1^{3}/_{16}$-inch flooring with hinged trap door and stairway leading to the lower part.

PAINTING—Outside of building painted one coat of gray paint with white trim.

RUNWAY—Wood frame, covered with 1-inch mesh galvanized wire netting.

OUTFIT—Complete hennery outfit (see page 47), consisting of two 4-foot perches, drop board and three nests.

55C152—Simplex Ready Made Chicken House, complete with wire netting covered runway. Shipping weight, 660 pounds.
Price.....**$54.00**

55C152A—Simplex Ready Made Chicken House, same as 55C152, but without wire netting covered runway. Shipping weight, 600 pounds. Price.....**$40.00**
Shipped from factory in SOUTHERN ILLINOIS.

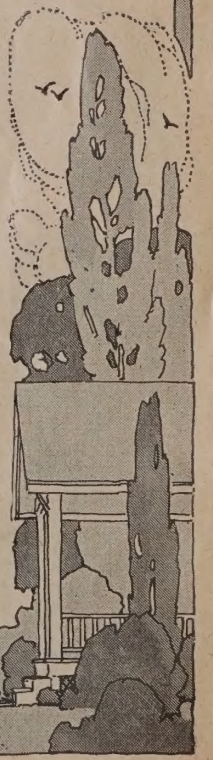

Ready Made Brood Coops

Simplex Ready Made Brood Coop 55C154—With Open Runway.

This is a practical Brood Coop which saves time and labor in caring for chickens. The open runway provides plenty of fresh air and sunlight so that the growing chicks are kept in healthy condition at all times. The wire netting protects them from dogs, while the wooden floor in coop keeps out dampness.

These Ready Made Brood Coops are a good investment for poultry raisers because when used fewer chicks die from disease or from the ravages of prowling animals.

The coop is made in sections—two sides, front, back, roof and floor; it is easily fastened together with screws which we furnish. In the Fall it can be quickly taken apart and stored for the following season.

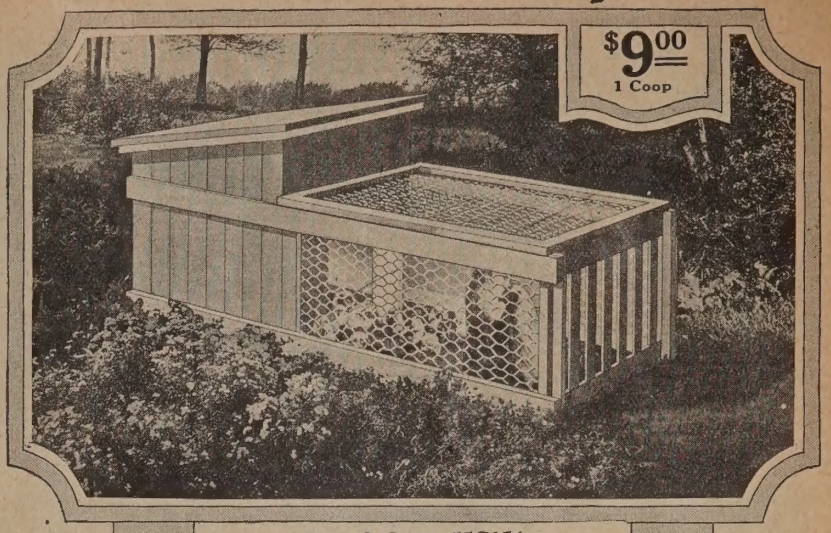

Brood Coop 55C154

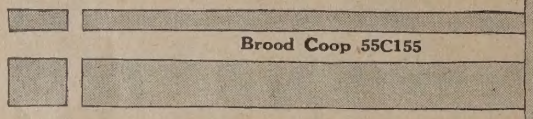

Brood Coop 55C155

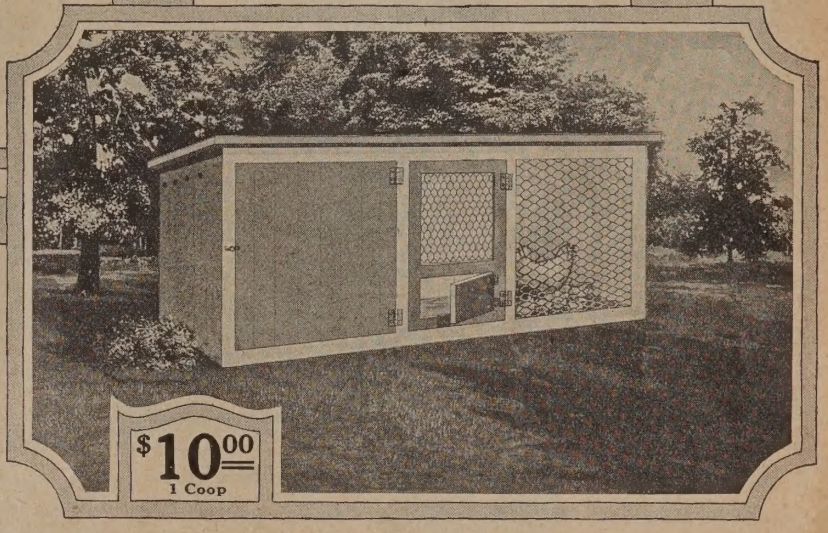

Simplex Ready Made Brood Coop 55C155—With Closed Runway.

55C155 is the same size Brood Coop as 55C154, shown above, but has the roof extended over both the coop and the runway. In severe climates the closed runway type of brood coop is more suitable, as the chickens are protected from three sides while the front is covered with 1-inch mesh wire netting, allowing air and sunlight to enter. The center frame or netting forms a hinged door, giving access to the coop; at the bottom of this door is a swinging shutter for the chicks to get out. A wood partition separates the nest compartment from the runway and is provided with a sliding door. Floor extends under the nest part only, leaving the runway for scratch space.

Double use may be made of the coops in cases where two, four or six hens have hatchings about the same time, as two broods can be put in each coop under the protection of one mother hen.

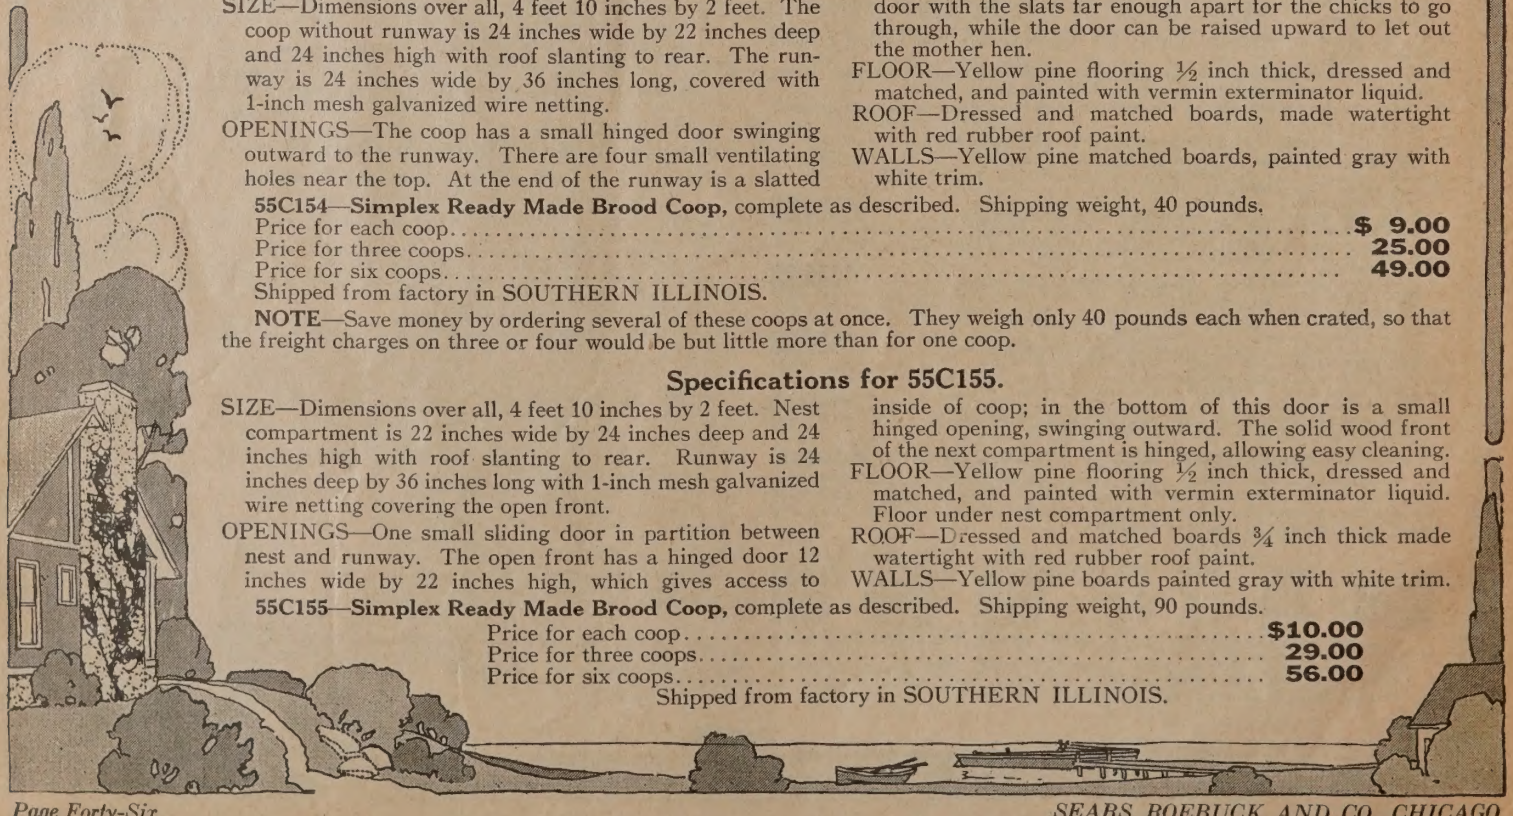

Specifications for 55C154.

SIZE—Dimensions over all, 4 feet 10 inches by 2 feet. The coop without runway is 24 inches wide by 22 inches deep and 24 inches high with roof slanting to rear. The runway is 24 inches wide by 36 inches long, covered with 1-inch mesh galvanized wire netting.

OPENINGS—The coop has a small hinged door swinging outward to the runway. There are four small ventilating holes near the top. At the end of the runway is a slatted door with the slats far enough apart for the chicks to go through, while the door can be raised upward to let out the mother hen.

FLOOR—Yellow pine flooring ½ inch thick, dressed and matched, and painted with vermin exterminator liquid.

ROOF—Dressed and matched boards, made watertight with red rubber roof paint.

WALLS—Yellow pine matched boards, painted gray with white trim.

55C154—Simplex Ready Made Brood Coop, complete as described. Shipping weight, 40 pounds.

Price for each coop..... **$ 9.00**
Price for three coops..... **25.00**
Price for six coops..... **49.00**

Shipped from factory in SOUTHERN ILLINOIS.

NOTE—Save money by ordering several of these coops at once. They weigh only 40 pounds each when crated, so that the freight charges on three or four would be but little more than for one coop.

Specifications for 55C155.

SIZE—Dimensions over all, 4 feet 10 inches by 2 feet. Nest compartment is 22 inches wide by 24 inches deep and 24 inches high with roof slanting to rear. Runway is 24 inches deep by 36 inches long with 1-inch mesh galvanized wire netting covering the open front.

OPENINGS—One small sliding door in partition between nest and runway. The open front has a hinged door 12 inches wide by 22 inches high, which gives access to inside of coop; in the bottom of this door is a small hinged opening, swinging outward. The solid wood front of the next compartment is hinged, allowing easy cleaning.

FLOOR—Yellow pine flooring ½ inch thick, dressed and matched, and painted with vermin exterminator liquid. Floor under nest compartment only.

ROOF—Dressed and matched boards ¾ inch thick made watertight with red rubber roof paint.

WALLS—Yellow pine boards painted gray with white trim.

55C155—Simplex Ready Made Brood Coop, complete as described. Shipping weight, 90 pounds.

Price for each coop..... **$10.00**
Price for three coops..... **29.00**
Price for six coops..... **56.00**

Shipped from factory in SOUTHERN ILLINOIS.

Ready Made Outfits and Hoppers

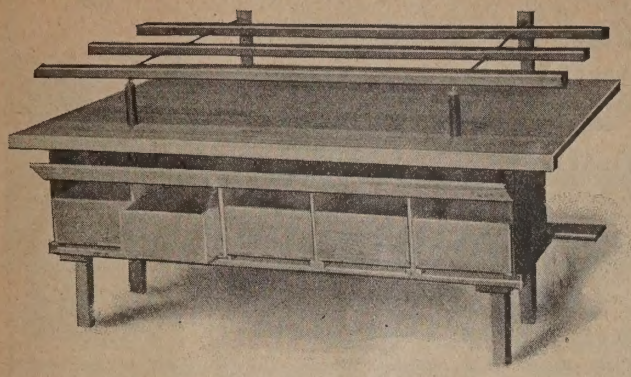

Simplex Ready Made Hennery Outfit 55C156

55C156 is a combined Roosting and Nesting Outfit. The nest boxes, which are 12 inches wide, 16 inches long and 6 inches deep, slide in and out like a drawer, the hens entering at the rear. The long hinged board, attached to the front, keeps the nests dark and is raised when gathering eggs. The drop board, made of dressed and matched boards ⅝ inch thick, covers the nests and may be removed, allowing easy cleaning. The wooden perches, 1½x1¾ inches, are spaced 13 inches apart on wood bars. These bars fasten to the wall by hinged blocks and are supported above the drop board by wooden standards. This hennery outfit is made ready for use by simply attaching the legs and roosts. Hennery outfit treated with vermin proof liquid. Shipped from factory in SOUTHERN ILLINOIS.

PRICES OF SIMPLEX READY MADE HENNERY OUTFITS.

Catalog No. of Outfits	No. of Chickens Accommodated	No. and Length of Perches	No. of Nests	Shipping Wt., Pounds	Price of Outfit, Complete
55C156	10	Two 4-foot	3	70	**$10.00**
55C156A	14	Two 5-foot	4	90	**12.00**
55C156B	16	Two 6-foot	5	110	**15.00**
55C156C	20	Three 5-foot	4	100	**14.00**
55C156D	24	Three 6-foot	5	120	**16.00**
55C156E	28	Two 10-foot	9	180	**24.00**
55C156F	33	Three 8-foot	7	160	**21.00**
55C156G	40	Three 10-foot	9	200	**26.00**

Simplex Ready Made Feed Hopper 55C157

This is an improved type of feed hopper. It saves time and labor in caring for poultry. This method of feeding is now recognized as the most sanitary and will insure healthy chickens and a large supply of eggs.

Our Simplex Hopper has movable partitions so that from one to five different kinds of feed may be put in at one time. For example, dry mash, grit, bone, shells and charcoal. This method of division saves the cost of additional hoppers for each kind of feed; it also permits the fowls to pick out whatever feed they desire, so that they are not inclined to eat more of one kind than they need. The chickens can feed from both sides of the hopper.

The complete hopper consists of two ends, two sides, the top and food trough for keeping separate the different foods. All parts are perfectly fitted and shipped crated in a flat bundle. The parts can be put together in a few minutes' time.

The Simplex Hopper can be furnished in three sizes. 55C157 is for small flocks of twenty to thirty chickens. 55C157A is for flocks of thirty to sixty chickens. 55C157B is used for large flocks of from sixty to one hundred chickens.

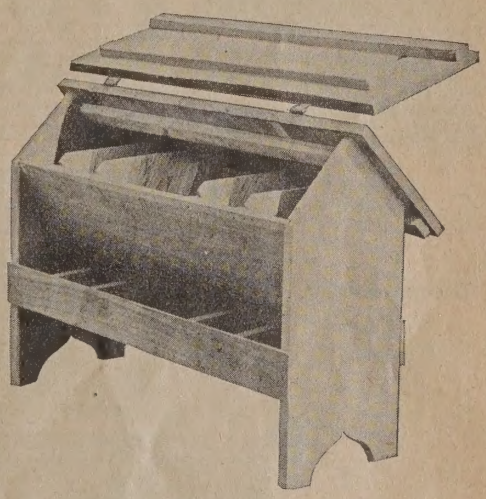

55C157—Simplex Feed Hopper, 12x24 inches. Capacity, 16 quarts. Shipping weight, 25 pounds. Price..... **$4.90**

55C157A—Simplex Feed Hopper, 12x30 inches. Capacity, 24 quarts. Shipping weight, 30 pounds. Price..... **$5.90**

55C157B—Simplex Feed Hopper, 12x36 inches. Capacity, 32 quarts. Shipping weight, 35 pounds. Price..... **$7.90**

Shipped from factory in SOUTHERN ILLINOIS.

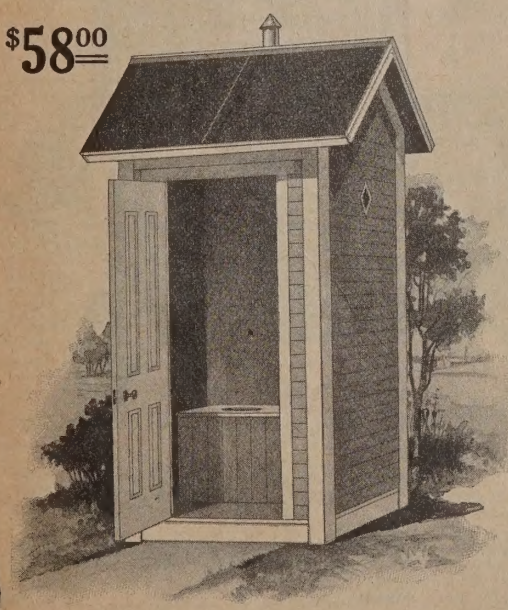

Simplex Ready Made Outhouse 55C14

This Outhouse has a gable or double pitch roof and is shipped in sections ready to put together. The price asked for this building is very low, considering the high quality of material and workmanship, and you save the cost of carpentry work and most of the cost of painting, as all parts are carefully fitted and the outside of the building painted with one coat of gray paint.

Specifications for Simplex Ready Made Outhouse 55C14.

SIZE OF OUTHOUSE—4 feet wide by 4 feet deep.

FOUNDATION—The building can be placed on the ground or raised a few inches upon supports. The sills are bolted at the corners and braced with the joists, so as to form a substantial base; foundation posts are not included. Size of sills 3x6; joists, 2x6 in.

FLOOR—Yellow pine floor made in sections; a seat 14 inches deep and 48 inches wide, placed 18 inches above the floor is included.

WALL SECTIONS—Made of yellow pine drop siding planed on both sides and tongued and grooved, ¾ inch thick. Height of walls is 7 feet to eaves and 8 feet to ridge.

ROOFING BOARDS—Made of ⅝-inch yellow pine boards, beaded on the under side.

DOOR FRAME—Good grade yellow pine, fitted to wall sections; inside and outside casings included.

DOOR—Size, 2 feet 6 inches wide by 6 feet 6 inches high, fitted and hung. Side ventilator openings are diamond shape, one on each side.

ROOFING—45-Pound 2-Ply Best-of-all Asphalt Roofing.

HARDWARE—Lock, knobs and hinges fitted in door; all necessary bolts and screws furnished.

PAINTING—Outside of building primed with one coat of gray paint.

55C14—Simplex Ready Made Gable Roof Outhouse with floor and wooden seat. Shipping weight, about 720 pounds. Price..... **$58.00**

The same size building can be furnished with a single slope shed roof instead of a gable for $56.00.

Outhouse shipped from factory in SOUTHERN ILLINOIS.

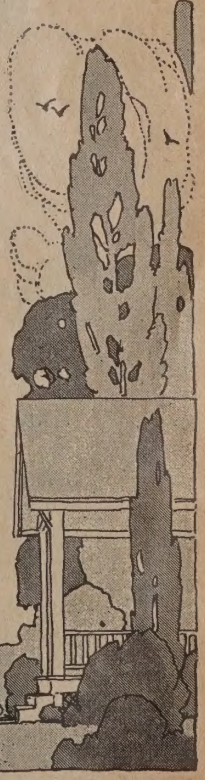

Accessories for Ready Made Buildings

Useful Articles Which Can Be Furnished for Our Ready Made Houses and Garages.

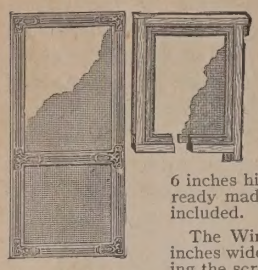

Door and Window Screens.

We can furnish Door and Window Screens, including the frames, with twelve-mesh wire screen cloth attached. The screens and frames are painted with high grade black paint.

Screen Doors are 2 feet 6 inches wide by 6 feet 6 inches high and made to fit the standard door frames in our ready made buildings. Hinges, spring, screws and latch are included.

The Window Screens cover the lower sash; size, 2 feet 4 inches wide by 2 feet 6 inches high. Metal fasteners for attaching the screen to the windows are included.

Shipped from ready made building factory in SOUTHERN ILLINOIS.

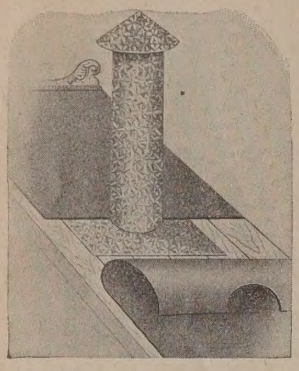

55C100—Ready Made Screen Door, complete with hinges, screws, latch and spring, as described. This is an extra strong and well made door. Shipping weight, 15 pounds. Price, each.....**$4.30**

55C99—Ready Made Window Screen for lower sash, complete with fasteners, as described. This is an extra strong and well made screen. Shipping weight, 5 pounds. Price, each.....**$1.45**

Galvanized Steel Chimneys.

One of these Galvanized Steel Chimneys is included with every ready made house, but sometimes an extra one is required in case more than one stove is used.

Our Ready Made Galvanized Steel Chimneys are 6 inches in diameter by 30 inches high. They are made of 28-gauge sheet steel, heavily galvanized to prevent rust. A metal flange 16x24 inches is attached to the lower part and beveled so as to fit a roof of one-fourth pitch. Illustration shows how chimney is attached and how roofing is fitted around it.

Shipped from ready made building factory in SOUTHERN ILLINOIS.

55C97—Galvanized Steel Chimney, complete as described. Shipping weight, 15 pounds. Price, each.....**$2.65**

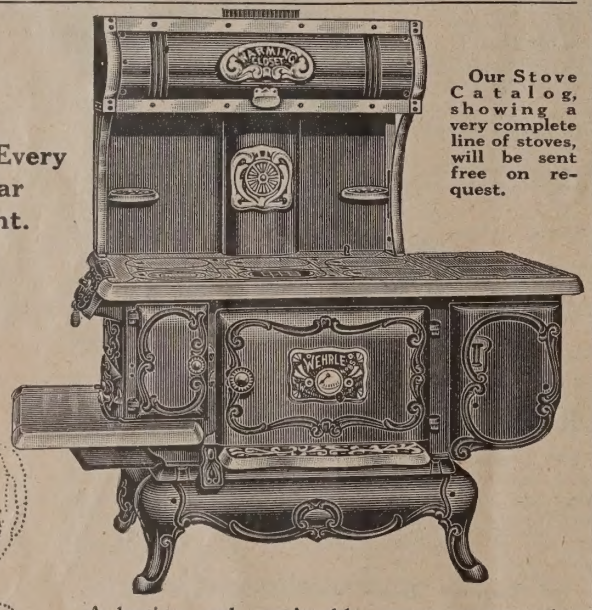

Makes Every Dollar Count.

Our Stove Catalog, showing a very complete line of stoves, will be sent free on request.

A lasting and serviceable range, representing splendid value. Solid cast iron body, big and roomy six-lid cooking top. Oven can always be depended on for quick work. Fire box is just the right size and construction to do quick cooking and baking without waste of fuel.

Reservoir tank is white porcelain enameled inside. If range is wanted without reservoir, deduct $3.00 from price. Water front, $4.25 extra. When ordered without reservoir, range is shipped from Newark, Ohio.

We guarantee safe delivery and ship at once from one of the following cities, the one nearest you: Kankakee, Ill., Syracuse, N. Y., Harrisburg, Penn., Pittsburgh, Penn., Newark, Ohio, Indianapolis, Ind., St. Louis, Mo., Kansas City, Mo., Davenport, Iowa, Waterloo, Iowa, Omaha, Neb., Madison, Wis., St. Paul, Minn.

Measurements: Oven, 17x17 inches. Six No. 8 lids. Top, including reservoir, 41½x26¼ inches. Reservoir holds 13½ quarts. Takes 7-inch stovepipe. Shipping weight, about 478 pounds.

22C3156—Price for range, complete as illustrated.....**$54.60**

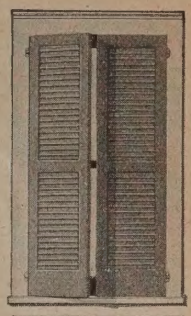

Ready Made Window Blinds.

Ready Made Window Blinds are fitted with patent hinges and latch and have roller slats. They are the proper size to fit into our standard windows for ready made buildings.

Window blinds add greatly to the appearance of a house and it is becoming the custom again to use them on modern residences. They are not only an attraction but an economy as well, for they protect the windows from injury during storms and shield the carpets or furniture from the direct rays of the sun, at the same time allowing free circulation of air.

Shipped from ready made building factory in SOUTHERN ILLINOIS.

55C98—Ready Made Window Blinds, complete with hinges and latch, as described. Shipping weight, 17 pounds.
Price, per pair.....**$5.95**

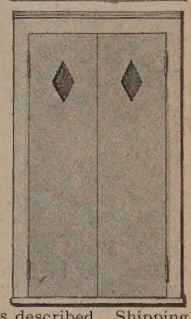

Door and Window Shutters.

Our Door and Window Shutters are made of 5/8x3¼-inch No. 1 yellow pine, dressed one side, beaded on the other. They are simple in construction, strongly made and fitted with hinges and fasteners complete. This style of shutter is used for protecting the windows and glazed doors when the house is not in use.

The shutters come in pairs, accurately cut so as to fit our standard doors and windows, and can be furnished in either crescent or diamond design.

Shipped from ready made building factory in SOUTHERN ILLINOIS.

55C96—Ready Made Window Shutters, complete as described. Shipping weight, 10 pounds. Price, per pair.....**$3.00**

55C95—Ready Made Door Shutters, complete as described. Shipping weight, 15 pounds. Price, per pair.....**$3.90**

Plain Oil Opaque Window Shades.

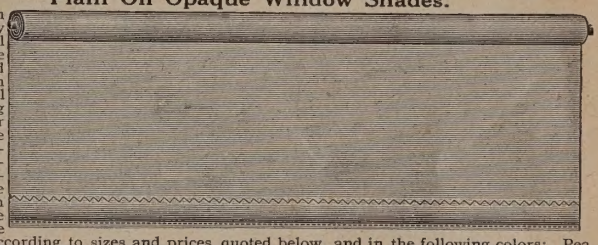

Made from high quality machine oil opaque shade cloth and mounted on substantial patent spring rollers. For best service and satisfaction we highly recommend these shades. Plain Oil Opaque Shades are furnished according to sizes and prices quoted below, and in the following colors: Pea green, terra cotta, dark green, buff, olive green, slate or white. **Mention color and size wanted.** Shipped from CHICAGO, ILL. Shipping weight, each shade, about 1¾ lbs.

24C1120¼—Width, 36 inches. Length, 6 feet. Price, each.....**$1.08**
24C1140¼—Width, 36 inches. Length, 7 feet. Price, each.....**1.23**
24C1160¼—Width, 36 inches. Length, 8 feet. Price, each.....**1.38**
24C1182¼—Width, 38 inches. Length, 7 feet. Price, each.....**1.36**
24C1130½—Cut down less than 36 inches wide. Length, 6 feet. Price, each. **1.13**
24C1150½—Cut down less than 36 inches wide. Length, 7 feet. Price, each. **1.29**
24C1170½—Cut down less than 36 inches wide. Length, 8 feet. Price, each. **1.44**

E-Zest WAY Wickless Stove

One of our best and most popular cooking outfits. The extra size burners give an intense heat that does very quick work. Blue porcelain enameled chimneys prevent waste of heat. The oven is a quick and sure baker.

Don't work over a scorching hot coal or wood stove in hot Summer weather. Keep cool and be comfortable by using this outfit.

This stove is shipped from KANKAKEE, ILL., SYRACUSE, N. Y., NEWARK, OHIO, KANSAS CITY, MO., or ST. PAUL, MINN.

Top of stove measures 37x14 inches. Shipping weight of stove, about 53 pounds; of oven, about 27 pounds.

This stove uses asbestos lighting rings instead of wicks. Order an extra dozen for future use. 22C5401—Price, per dozen, $1.30.

22C34150—Price for stove with oven.....**$20.00**
22C3415—Price for stove without oven.....**15.75**

SEROCO HOUSE PAINT

Seroco Paint Is Made in Our Own Paint Factory.

We control every step in the process of making our paints. We test all raw materials in our laboratory for pureness and these ingredients are blended, ground and mixed under expert supervision. Every part of the process is subject to the most rigid inspection. Our guarantee of quality and service is very broad and binding.

Our Seroco Paint is made to fulfill two requirements—protection and appearance. It forms a beautiful, glossy surface that readily sheds water and protects and preserves the surface underneath from rot and decay.

Ready to Use—We make our paint with the one idea in mind of having it suitable for use by the home owner who is not used to painting. We prepare the paint in our factory ready to use. There is nothing for you to add and nothing to do but open the can, stir up the paint thoroughly and brush it on to the house. Our paint spreads easily and evenly and anyone without any previous experience can do a good job of painting with it. Send for our "How to Paint" Booklet if you want detailed advice or instruction on painting.

COLORS AND PRICES OF SEROCO READY MIXED HOUSE PAINTS.

30N209—Beaver.	**30N202**—Dove.	**30N235**—Light Stone.	**30N217**—Pure Blue.
30N239—Black.	**30N236**—Emerald Green.	**30N224**—Maroon.	**30N258**—Seal Brown.
30N218—Buff.	**30N216**—Fawn.	**30N244**—Medium Green.	**30N233**—Slate.
30N206—Canary.	**30N201**—French Gray.	**30N232**—Myrtle Green.	**30N219**—Terra Cotta.
30N230—Chocolate Brown.	**30N253**—Golden Green.	**30N213**—Nile Green.	**30N256**—Tinted White.
30N246—Colonial Yellow.	**30N221**—Leather Brown.	**30N252**—Oak Wood.	**30N226**—Willow Green.
30N254—Cream Tint.	**30N207**—Lemont Stone.	**30N229**—Oxide Red.	**30N257**—White (Inside).
30N215—Cream.	**30N223**—Light Blue.	**30N204**—Pea Green.	**30N243**—White (Outside).
30N237—Dark Gray.	**30N259**—Light Gray.	**30N208**—Pearl.	

Order by catalog number and state color wanted.

50-gallon barrel	(Shpg. wt., 750 lbs.)	**Per gallon, $2.40**
25-gallon half barrel	(Shpg. wt., 375 lbs.)	**Per gallon, 2.45**
5-gallon can	(Shpg. wt., 80 lbs.)	**Per gallon, 2.55**
3-gallon can	(Shpg. wt., 50 lbs.)	**Per gallon, 2.57**
1-gallon can	(Shpg. wt., 19 lbs.)	**2.58**
½-gallon can	(Shpg. wt., 10 lbs.)	**1.35**
1-quart can	(Shpg. wt., 6 lbs.)	**.70**

NOTE—On painted surfaces in fairly good condition apply two coats of Seroco Ready Mixed House Paint just as you receive it. On surfaces that never have been painted, and on old, porous surfaces badly in need of paint, three coats should be applied; the first coat thinned in proportion of 1 pint of turpentine and 1 pint of raw linseed oil to each gallon of Ready Mixed Paint. If you need turpentine and linseed oil with your paint, send for our daily quotation card for prices before ordering your paint. **One gallon of Seroco House Paint will cover about 250 square feet, two coats, or 170 square feet, three coats.**

Rubberset Paint Brush.

Bristles are set in vulcanized rubber. High grade Chinese black bristles, metal bound. For use wherever a good brush is required.

30N30931

Width, In.	Length, In.	Shpg. Wt., Oz.	Price, Each
2½	2¼	8	**$0.38**
3	2½	10	**.46**
3¼	2¾	11	**.59**
4	3	12	**.83**
4½	3¼	13	**1.17**

Preservative Shingle Stain.

Few people would care to take the trouble of applying a stain that merely beautifies, when by paying a little more money they can obtain a stain that both beautifies and preserves. Such a stain is our Preservative Creosote Shingle Stain.

A Combined Wood Preserver and Beautifier.

We use an exceptionally large percentage of heavy Creosote Oil in our Creosote Shingle Stain, so that it not only beautifies, but also **protects** and **preserves** your shingles. Creosote Oil is one of the best wood preservers known, so that a shingle stain containing the maximum of this excellent preservative is sure to give the very best service and satisfaction. One gallon of this Creosote Stain will cover approximately 75 to 80 square feet of shingles, two coats. When dipped, 2½ to 3 gallons will cover approximately 1,000 of the regulation 4x16-inch shingles. Two-thirds of the length of the shingle only need be dipped. Shingles should never be painted, because the paint leaves a ridge at the butt end of the shingle and holds the moisture under the lap, causing the shingles to rot. Our Preservative Creosote Shingle Stain penetrates the shingles, follows the pores and grain of the wood up under the lap and prevents rot and decay.

Preservative Creosote Shingle Stain is made only in the following colors, the only colors in which Creosote Stain can be successfully made.

NOTE—Only the brown can be used on hardwood.

30N1181—Moss Green.
30N1185—Red.
30N1186—Bungalow Brown.

		Per Gal.
50-gal. barrel	(Shpg. wt., 500 lbs.)	**80c**
25-gal. half bbl.	(Shpg. wt., 250 lbs.)	**86c**
5-gal can	(Shpg. wt., 50 lbs.)	**92c**
1-gal. can	(Shpg. wt., 15 lbs.)	**95c**

The stains listed above are recommended for new shingles. If you want a special stain to be used on old shingles, write us for prices and description.

Mineral Barn Paint.

An exceptionally high grade barn paint. We have put more real quality into our barn paint formula than might be considered necessary for a paint of this class. We use a big percentage of the purest linseed oil and it is a well known fact that the life of any paint is dependent largely on the strength of the oil film which it forms on the surface painted.

For barns, stables, sheds, warehouses and all outbuildings we consider this a first class paint that will give perfect satisfaction. It is not ground quite so fine as our house paints and does not contain expensive lead and zinc pigments which must be used in house paints for the more delicate colors.

We want you to try it out for yourself. Send for a gallon can, paint a section of your barn which receives the hardest wear, and after a thorough trial we believe that you will send for a sufficient quantity to paint the entire barn.

One gallon of Seroco Weatherproof Mineral Barn Paint will cover approximately 250 square feet of surface, two good coats, and in many instances it will cover 300 square feet and over, two coats, depending upon the condition of the surface. All new wood should receive three coats for a good job.

Colors and Prices of Seroco Mineral Barn Paint.

30N800—Oxide Red.
30N820—Dark Gray.
30N830—Yellow.
30N850—Maroon.

		Per Gal.
50-gal. barrel	(Shpg. wt., 700 lbs.)	**$1.68**
25-gal. half bbl.	(Shpg. wt., 350 lbs.)	**1.75**
5-gal. can	(Shpg. wt., 70 lbs.)	**1.80**
3-gal. can	(Shpg. wt., 45 lbs.)	**1.82**
1-gal. can	(Shpg. wt., 15 lbs.)	**1.83**

The difference in the cost per gallon in the various containers is due to the cost of putting up and handling as well as the difference in the cost of the containers.

Porch Floor Paint.

The paint on the floor of the ordinary porch receives more actual wear than paint used on almost any other surface. It is usually exposed to all the destructive weather. Rain beats upon it and snow and ice sometimes cover it for days. The entire family walks on it almost daily and it is swept and scrubbed regularly. Furniture and hammocks all do their share in wearing off a porch floor paint.

Realizing the severe tests to which a porch floor paint is usually subjected, we developed a formula for the manufacture of a paint that would answer every requirement demanded of a paint for this purpose.

Porch Floor Paint has the same covering capacity as Interior Floor Paint, shown below.

Furnished only in the following colors:
30N600—Gray.
30N610—Lead Color.
30N620—Drab.
30N630—Light Brown.

		Price
1-qt. can.	(Shpg. wt., 4¼ lbs.)	**$0.69**
½-gal. can.	(Shpg. wt., 10 lbs.)	**1.34**
1-gal. can.	(Shpg. wt., 15 lbs.)	**2.58**

Interior Floor Paint.

Made to withstand hard wear and lots of it. You must have good quality in a floor paint, for the floor receives the hardest kind of wear. This paint dries quickly and has a good gloss. Contains a good lot of varnish.

New or old floors which have not been previously painted require three coats. One gallon will cover approximately 300 to 350 square feet, two coats, and from about 200 to 250 square feet, three coats. It will dry in a single night.

30N500—Buff. **30N550**—Maroon.
30N510—Yellow. **30N555**—Light Brown.
30N530—Drab. **30N540**—Lead Color. **30N570**—Gray.

		Price
1-qt. can.	(Shpg. wt., 4¼ lbs.)	**$0.59**
½-gal. can.	(Shpg. wt., 10 lbs.)	**1.14**
1-gal. can.	(Shpg. wt., 15 lbs.)	**2.16**

Auto and Carriage Enamel.

A combination of high grade varnish and pure non-fading colors. Flows freely and dries with a smooth finish and high gloss. An auto enamel that we believe to be one of the very best to be had anywhere at any price. Three quarts should be enough to enamel the body and gear of a touring car two coats. No other finish need be applied. Directions for applying are printed on each can.

30N1700—Pure Yellow. **30N1735**—Brewster Green.
30N1705—Vermilion. **30N1740**—Black.
30N1715—Dark Wine. **30N1755**—Dark Blue.
30N1720—Mouse Gray. **30N1760**—Auto Gray.

1-pt. can.	(Shpg. wt., 2½ lbs.)	**$0.49**
1-qt. can.	(Shpg. wt., 4¼ lbs.)	**.88**
½-gal. can.	(Shpg. wt., 9 lbs.)	**1.66**
1-gal. can.	(Shpg. wt., 13 lbs.)	**3.00**

Sanitary Wall Oilcloth

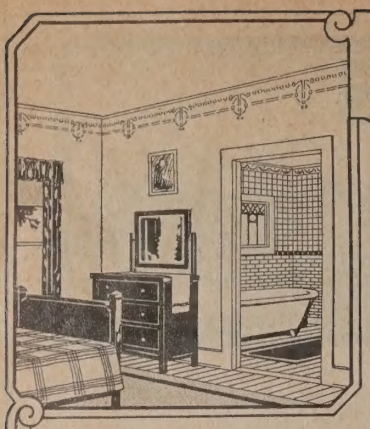

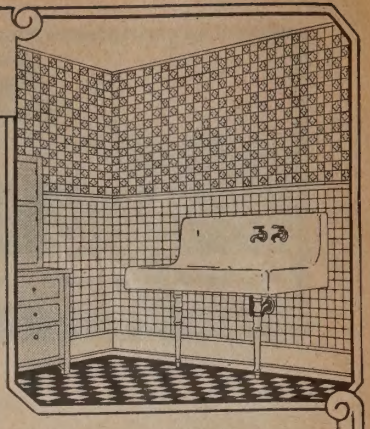

WALL Oilcloth is a sanitary and very serviceable and beautiful wall covering for kitchens, pantries and bathrooms. Just think of the fact that the walls of your kitchen, pantry or bathroom can be washed with soap and water, making them clean and like new, without the trouble and expense of replacing, as is necessary with other wall coverings.

Wall Oilcloth is easy to apply—it is hung just like wall paper.

All the tile and figured patterns have a high gloss finish and have borders to match. The designs are printed in fadeless oil colors.

The plain dull finish patterns are pebble embossed solid tints and have a soft velvety finish, making them a very desirable decoration for bedrooms, living rooms, etc. Used with a stencil border these patterns will make some of the most attractive rooms possible to obtain.

To find the amount of 47-Inch Oilcloth Wall Covering required to cover a certain area divide the area in square feet by eleven (11). For example: Area to cover 132 square feet, divided by eleven, equals 12 yards, the quantity of oilcloth to order. For border, divide the distance around the room in feet by 3 to get the number of yards of border to order.

Border.

53N42—Blue Border.
53N43—Green Border.
53N44—Brown Border.

This border has a gloss finish and should only be used with the gloss finish patterns. About 5¾ inches wide. For the plain dull finish pebble embossed side wall use a stencil border, as shown in the illustration above.

Prices of Oilcloth Wall Covering.

Width, About 47 Inches.

Wall, any pattern or color, per yard.....(Shipping weight, 1½ pounds).....$0.59
Wall, any pattern or color, per 12-yard piece.....(Shipping weight, 11 pounds)..... 6.90
Border, any color, 5¾ inches wide, per yard.....(Shipping weight, 3 ounces)..... .13

Wall—Furnished in Plain Gloss White, 53N46, and in the following patterns:

53N31—Blue gloss finish.
53N32—Green gloss finish.

53N35—Blue gloss finish.
53N36—Brown gloss finish.

53N33—Blue gloss finish.
53N34—Green gloss finish.

Plain Dull Finish, Pebble Embossed.

53N39—Ivory.
53N41—Cream.
53N40—Light Green.
53N38—Light Blue.

Ceiling

For Plain Gloss White Ceiling order 53N46. For ceiling to use with the plain dull finish pebble embossed wall oilcloth order 53N39.

Lincrusta Wall Covering



53N1420—Tan.
53N1421—Brown.

53N1406—Tan.
53N1407—Brown.



53N1400—Cream.
53N1401—Tan.
53N1402—Blue.

53N1403—Tan.
53N1404—Brown.
53N1405—Blue.

53N1414—Ivory.
53N1415—Tan.
53N1416—Gray.

Lincrusta is a beautiful, very durable wall covering for halls, dining rooms, libraries, etc. It permits of a variety of treatment in the way of paneling, using with plate rails, etc. A very complete line of moldings is shown in our Wall Paper Sample Book, a copy of which will be sent free to you on request.

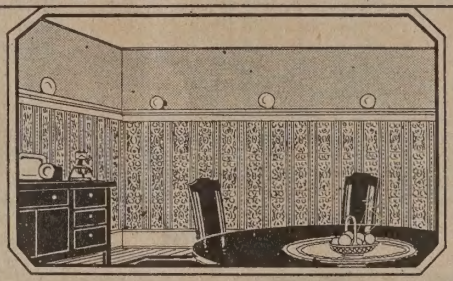

Samples will be sent on request.

Lincrusta is furnished in a variety of pleasing, fashionable interior colors. It is offered in ten patterns, as shown in the small illustrations. Actual samples will be sent to you free on request. Lincrusta is easy to hang. Directions for applying are enclosed with each roll.

53N1422—Tan.
53N1423—Brown.

53N1424—Ivory.

53N1417—Tan.
53N1418—Brown.
53N1419—Green.

53N1411—Tan.
53N1412—Brown.
53N1413—Green.



53N1408—Tan.
53N1409—Brown.
53N1410—Gray.

Closely resembles carved leather. The designs stand out boldly and in deep relief from the background, somewhat on the order of embossing, but in a much more pronounced manner. The material is heavy and, under proper treatment, gives excellent service for years.

Used for wainscoting in libraries, vestibules, public halls and churches, for stairways and entrance halls, and for the lower third or two-thirds of the dining room wall, being placed just beneath the plate rail. It resists dampness and may be washed with soap and water without the least injury to material and finish. Lincrusta is hung just like wall paper.

Order by catalog number. Width, 19¼ inches. Shipping weight, per yard, about 1 pound.

Price, per yard, any pattern, any color.....25c

Vitrophane

53N1195

53N1191

53N1194



53N1192

53N1196

Produces imitation art glass effect on windows, glass doors, etc. It does not exclude the light and oftentimes takes the place of curtains or shades. May be washed without injury, is guaranteed not to fade, peel or blister. Any housewife can apply it. Directions for applying with each roll. Width, 18 inches. Shipping weight, 12 ounces.

53N1194—Red and green squares, black lines.
53N1196—Red flowers and green leaves, black lines.
53N1191—White lace effect pattern.
53N1192—Green squares, black lines.
53N1195—Green squares, black lines; white lace effect pattern. Price, per roll, 4½ yards long.....60c

Seroco Elastic Liquid Sizing.

This sizing can be used on white-washed, kalsomined, painted or sand finished walls or ceilings. It creates a perfect surface on which to hang any material. It sticks, and sticks for good. For heavy wall coverings it is ideal. Used on kalsomined walls it saves the annoyance of washing, and paper can be hung without danger of peeling. One quart will make enough size for the walls of an ordinary room.

30N2789

1-quart can.....(Shipping wt., 3 lbs.).....$0.40
1-gallon can.....(Shipping wt., 10½ lbs.)..... 1.35

Prepared Paste Flour.

Only Boiling Necessary.

Will make strong and adhesive paste. One pound will make 2 gallons of ready to use paste or 1 gallon solid paste. No chemicals or preservatives required. Guaranteed not to sour.

30N2786

1-pound package 16c
Shipping weight, 1⅝ pounds.
25-pound pail $3.75
Shipping weight, 31 pounds.

Cold Water Dry Paste.

Dissolves immediately in cold water. Makes a smooth, transparent and snow white paste. Will not sour, and will hang any kind of wall paper. One 2-pound bag will make enough paste for the walls and ceiling of an ordinary size room.

30N2787

2-pound bag.....(Shipping wt., 2½ lbs.).....$0.30
5-pound bag.....(Shipping wt., 6 lbs.)..... .70
25-pound drum ....(Shipping wt., 30 lbs.)..... 3.25

Paper Veneer

Paper veneer is a heavy manila paper printed in oil colors to resemble oak grain. It is used in place of wall paper in dining rooms, halls, stairways and dens and produces a dignified and beautiful effect. A coat of clear varnish, such as our Rubbed Finish Varnish 30V2712, applied after the veneer is perfectly dry adds greatly to the appearance of the Veneer and makes it more durable. A very pretty panel effect can be produced by covering the seams of the veneer with panel molding, a very complete line of which is shown in our Wall Paper Sample Book. It is hung with ordinary paste. Directions for applying with each roll. Especially recommended to be used as a border around rugs, but should be protected at the doorways, as it will not stand up under constant foot friction. Each roll is 36 inches wide. Shipping weight, 2½ pounds per 8-yard roll. **Samples furnished free on request.**

53N1178—Straight grained golden oak.
53N1179—Quarter sawed oak.
53N1180—Straight grained brown weathered oak.

Price, per 8-yard roll.....$0.65
Price, per 16-yard roll..... 1.15

Home Beautifiers

Lightning Furniture Polish.

Also highly recommended for polishing automobile bodies.

Lightning Furniture and Piano Polish makes varnished surfaces look like new. Furniture on which this polish is used retains its highly lustrous finish for a long time. This is an especially high grade furniture polish and a polish we can safely recommend as one of the best on the market. Can be used on pianos or any high grade furniture as it positively will not injure the finest finish. Automobile owners find this polish one of the best auto body polishes on the market, and it is in great demand for this use.

30N2768	½-Pint	Pint	Quart
Shipping weight, pounds	1½	1⅝	3
Price	19c	30c	53c

Quick Refinisher Varnish.

Applied with a cloth, no brushes required. It produces a high gloss finish on old scratched and marred furniture, woodwork and floors. It dries in a few hours and leaves a high glossy surface. Try it on an old marred piece of furniture and see the wonderful results. This Quick Refinisher is used in hundreds of furniture stores to give a fresh, new appearance to furniture that has been used for show purposes, or has been in stock for some time.

30N2769

1-pint can .....(Shipping weight, 2 lbs.).....43c
1-quart can .....(Shipping weight, 3½ lbs.).....71c

Water Putty.

This is a hard drying mineral substance in powder form to be mixed with water. It dries in fifteen minutes. For filling imperfections and cracks in furniture, vehicles, plastered or board walls, floors, statuary, picture frames, sinks, etc. When dry water will not dissolve it and it may be sandpapered, carved or sawed without crumbling. Picture frames with composition ornaments may be repaired with our Water Putty. Use Seroco Crevice Filler 30V2660 on page 1261 of our Big Catalog No. 140 for filling cracks in old or new floors that are springy or not well nailed.

30N2659

1-pound package.....(Shipping weight, 2 lbs.).....11c
5-pound package.....(Shipping weight, 6¾ lbs.).....50c

The Handy Can of Oil.

Lubricating Oil for the Home.

For lubricating anything about the house; sewing machines, clocks, guns, bicycles, lawn mowers, washing machines, wringers, carpet sweepers, scales, baby carriages, grindstones, churns, etc. A few drops are sufficient. Will not gum or clog the most delicate machinery. A pale, light bodied oil of special quality. Put up in neat lithographed cans with oiler spout. Shipping weight, 1⅓ pounds.

30N3394—½-pint can 15c

Wall Paper and Window Shade Cleaner.

Our Wall Paper and Window Shade Cleaner is one of the best and easiest working cleaners on the market. It is prepared ready for use so that anyone can clean wall paper or window shades with it; no experience necessary. Cleaner is put up in airtight boxes and is guaranteed not to mold or dry out. Full directions on each box.

30N2782

13-ounce box .....(Shipping weight, 1½ lbs.)....$0.12
1 dozen boxes .....(Shipping weight, 16 lbs.).... 1.22
1 case (3 doz. boxes).(Shipping weight, 37 lbs.).... 3.42

FURNI-FLOR, the Universal Polish.

For Making Dustless Mops and Dustcloths.

For preparing as well as replenishing the oil in dustless mops and cloths. You can make your own dustless cloths by saturating a piece of cheesecloth with water, removing the surplus water by passing through a wringer, then adding a small quantity of Furni-Flor. The germ laden dust and dirt is collected and held in the cloth or mop and when through dusting you shake out the dust and it is again ready for use. It cleans as well as polishes all varnished, waxed and painted woodwork, furniture and floors.

30N3403

1-pint can .....(Shpg. wt., 2 lbs.).....25c
1-quart can .....(Shpg. wt., 3½ lbs.).....43c

Seroco Linoleum and Floor Oilcloth Varnish.

This varnish dries hard, but remains elastic like the linoleum or oilcloth itself, therefore it will not crack or check. By using Seroco Linoleum Varnish the linoleum or oilcloth will retain all its original brightness and luster, even under the severe wear it receives at doorways and halls, thus making the life of linoleum much longer. Hot or cold water does not affect it. A quart can and a few minutes of your time will save you ten times its cost. One coat will do the work; applied in the evening, it will be dry in the morning. About 1 quart is needed to cover a square 12x15 ft.

30N2642

1-pint can .....(Shpg. wt., 1¾ lbs.).....38c
1-quart can .....(Shpg. wt., 2¾ lbs.).....61c

Hercules Liquid Glue.

Will cement together wood, leather, ivory, cork, cloth, marble, glass, iron, china, crockery, pearl, metals, porcelain, etc. This is not a fish glue, but a pure hide and sinew glue in liquid form and has no offensive odor. Used extensively for coating under sides of rugs to prevent slipping on waxed or varnished floors.

30N3216

Large tube .....(Shpg. wt., 4 oz.).....10c
½-gill can .....(Shpg. wt., 8 oz.).....13c
½-pint can .....(Shpg. wt., 1¼ lbs.).....30c
1-pint can .....(Shpg. wt., 1⅞ lbs.).....45c
1-quart can .....(Shpg. wt., 3¼ lbs.).....75c

Seroco Bronzing Liquid.

For mixing with gold, aluminum and other bronze powders. This bronzing liquid serves the same purpose as banana liquid. It is used in exactly the same way but has two great advantages over banana liquid; it is much cheaper and has no offensive odor.

30N2167

1-pint can.....(Shpg. wt., 1⅔ lbs.).....$0.28
1-quart can.....(Shpg. wt., 2½ lbs.)..... .44
1-gallon can.....(Shpg. wt., 11 lbs.)..... 1.43

Bronze Powders.

Gold Bronze Powder. A good quality for general use. Furnished in three shades; bright gold color, rich brass color and Roman gold color. **When ordering be sure to mention shade desired.** Used in the proportion of 6 ounces of bronze to 1 pint of bronzing liquid.

30N2190—Gold Color.

2-ounce can .....(Shpg. wt., 3 oz.).....$0.23
1-pound can .....(Shpg. wt., 2 lbs.)..... 1.43

Aluminum or Silver Color Powder. Fine quality for general use. Used in the proportion of 4 ounces of powder to 1 pint of Seroco Bronzing Liquid.

30N2194—Aluminum Color.

2-ounce can .....(Shpg. wt., 3 oz.).....$0.21
1-pound can .....(Shpg. wt., 2 lbs.)..... 1.20

Seroco Gold Bronze and Aluminum Radiator Enamel.

For radiators or any heated surfaces such as stoves, boilers, engines, motors, mantels, furnaces, interior of oven or any metal surfaces likely to be subjected to a great deal of heat. Dries with a hard bright finish. The powder and liquid come separately in a neat compact can and must be mixed when ready to use. One ½-pint can of either enamel will cover a radiator of 12 columns, 36 inches high.

30N2122—Aluminum Radiator Enamel.

¼-pint can .....(Shipping weight, 1¼ lbs.).....$0.33
½-pint can .....(Shipping weight, 1¾ lbs.)..... .45
1-pint can .....(Shipping weight, 2½ lbs.)..... .74
1-quart can .....(Shipping weight, 3¾ lbs.)..... 1.10

30N2123—Gold Bronze Radiator Enamel.

¼-pint can .....(Shipping weight, 1¼ lbs.).....$0.38
½-pint can .....(Shipping weight, 1⅔ lbs.)..... .56
1-pint can .....(Shipping weight, 2⅔ lbs.)..... .90
1-quart can .....(Shipping weight, 2⅞ lbs.)..... 1.43

Radiator Bronzing Brush.



Radiator Bronzing Brush. Made of good soft hair. Width, 1½ inches; length, including handle, 9½ inches. Shipping weight, 2 ounces.

30N3013—Price, each.....26c

Seroco Gold Bronze and Aluminum Household Enamels.

Strictly high grade gold bronze and aluminum enamels. For all decorative purposes where a gold or silver finish is desired. Dry with a hard smooth finish. The powder and liquid come separately in a neat compact can and must be mixed when ready to use. For picture frames, chandeliers, statuary, bird cages, iron beds, baskets, wickerware, gas and electric fixtures, room moldings and bric-a-brac. Apply with our special bronzing brush listed below.

30N2145—Aluminum Household Enamel.

⅛-pint can .....(Shipping weight, 1⅛ lbs.).....21c
¼-pint can .....(Shipping weight, 1¼ lbs.).....32c
½-pint can .....(Shipping weight, 1⅝ lbs.).....45c

30N2147—Gold Bronze Household Enamel.

⅛-pint can .....(Shipping weight, 1⅛ lbs.).....23c
¼-pint can .....(Shipping weight, 1¼ lbs.).....36c
½-pint can .....(Shipping weight, 1⅝ lbs.).....48c

Brushes for Bronzing.



Soft Hair Brushes for applying gold and silver paints, bronzing, etc. Polished handle; fine quality; flat. Shipping weight, each, 1 ounce.

30N3011

Size, each	⅜	½	⅝	¾	⅞	1
Price, each	7c	9c	11c	13c	15c	17c

Vernis Martin Finish.

With this outfit anyone can produce the popular Vernis Martin finish on furniture, iron beds, etc. This outfit consists of one 1-ounce bottle of Vernis Martin Bronze, one ¼-pint can of special Mixing Liquid, one ¼-pint can of Vernis Martin Lacquer, two brushes and complete instructions. Enough to finish one ordinary bed. Shipping weight, 2⅜ pounds.

30N2128—Complete outfit 63c

Send for this Book Postpaid on Request
HOW to PAINT
THIS BOOK WILL TELL YOU
HOW TO PAINT
Mr. Home Owner!
You can paint! You can do all your own decorating! You can save yourself money! Our "How to Paint" Book will tell you all about it. Send for it. Postpaid on Request.

Kalsomine.

Velvet Sanitary Kalsomine is furnished in a complete range of beautiful tints and colors. It dries with a smooth, hard finish that will not rub off. Kalsomine is used extensively; in fact, it is one of the most popular ways of decorating, because of its beauty and sanitary properties. Kalsomining a room is a very economical way of decorating it; the kalsomine is not at all expensive and it is so easy to apply that you can do the work yourself, making it possible, if desired, to redecorate your home each season. Complete directions for applying are given on each package. Kalsomine can be used for any room, and by using different harmonizing colors in the various rooms a very charming and artistic home will result. It can be used over paper or wood.

A stencil border or panel on the walls or ceiling of a kalsomined room produces a beautiful effect at very little cost. A more complete line of stencils is shown in our big General Catalog.

One package will cover the walls of the average 10x12-foot room.

30N2600—Tan.
30N2603—Sepia Brown.
30N2604—Light Green.
30N2606—Cream.
30N2608—Light Buff.
30N2609—Shell Pink.
30N2610—French Gray.
30N2612—Light Delft Blue.
30N2613—Pea Green.
30N2614—Salmon Pink.
30N2615—Sea Green.
30N2616—Pearl Gray.
30N2617—White.

4-pound package ..... (Shipping weight, 5 lbs. 5 oz.)..... **$ 0.48**
Per case of 25 packages, all one color (Shipping weight, 115 pounds)..... **11.25**

Stencils.


30N409
Width, 4½ inches.
Price, each. **16c**


30N445
Width, 4 inches.
Price, each. **15c**

30N444
Width, 9½ inches.
Price, each. **30c**


30N447
Width, 4 inches.
Price, each. **24c**


30N432
Width, 3 inches.
Price, each. **15c**


30N446
Width, 5 inches.
Price, each. **15c**

These stencils are furnished in one repeat only.

Flat Finish Paint.

A Dull Finish Paint—For Interior Use Only. Guaranteed Waterproof and Washable.

Seroco Flat Finish Paint is the popular dull finish paint so much in demand now for interior decorating. For any interior painting we recommend Flat Finish Paint because it is especially prepared for that purpose, and we know that it will give satisfaction. It has all the properties of paint, except the high gloss, which has always been the objectionable feature of ordinary paint for interior use. It has a soft, velvety finish, and combines beauty with cleanliness and durability. It will not rub off and can be washed with soap and water without injury to the finish or color. A gloss paint sometimes has a tendency to bring out the defects on old surfaces. A flat finish paint never does this and, therefore, for refinishing old walls or woodwork it cannot be surpassed.

The general use of Flat Finish Paint is for interior walls, but we highly recommend it for woodwork, furniture, bakery and store shelves. It can be used as a base for enameling.

Seroco Flat Finish Paint has been perfected in our own factory and is sold under our unqualified guarantee. It is a very practical selection for decorating the walls of your home and we urge you to buy it, with the assurance that it will give you complete satisfaction.

One gallon will cover about 200 square feet two coats.

30N2004—Pearl Gray.
30N2005—Rich Cream.
30N2007—Shell Pink.
30N2008—Light Buff.
30N2009—Seal Brown.
30N2012—Sepia Brown.
30N2013—White.
30N2015—Light Tan.
30N2016—Blue Tint.
30N2018—Green Tint.
30N2019—Medium Green.

1-quart can ..... (Shipping weight, 5 pounds)..... **$0.68**
½-gallon can ..... (Shipping weight, 10 pounds)..... **1.30**
1-gallon can ..... (Shipping weight, 15 pounds)..... **2.43**

Undercoat for Kalsomine.

A special size to be used on plastered walls before applying Kalsomine. Two pounds will finish an ordinary size room. It is very economical because it produces an extra hard, permanent surface which holds up the kalsomine, thus increasing the spreading capacity and making the color flow evenly. It prevents grease and stain spots from working through and killing the color of the kalsomine. Full directions on every package.

30N2736—Size (Undercoat for Kalsomine).

1-pound package ..... (Shipping weight, 1¼ pounds)..... **$0.36**
4-pound package ..... (Shipping weight, 5 pounds 5 ounces)..... **1.40**

Kalsominers' Sponges.

High Grade Sponge. Commercially known as Sheep's Wool Sponge. Large, soft and full; used by professional kalsominers and painters.

30N2626—Price, each..... (Shipping weight, 4 ounces)..... **$1.16**

Common Sponge. This is a cheap sponge and not intended for professional use. For removing old kalsomine from walls. Shipping weight, 4 ounces.

30N2624—Sponge. Price, each..... **21c**

Flat Finish Size, or First Coater.

Walls that have not been previously painted should be thoroughly sized before applying Seroco Flat Finish Paint with the following mixture: 1 quart of size to 1 quart of Flat Finish Paint, using the same color of Flat Finish Paint for the size coat as for the finishing coat. This amount will cover about 250 square feet.

30N2734—Size for use with Flat Finish Paint.

1-quart can ..... (Shipping weight, 5 pounds)..... **$0.56**
1-gallon can ..... (Shipping weight, 15 pounds)..... **1.99**

Seroco Gloss Enamel.

An especially high grade enamel offered in a variety of pleasing shades for interior use. We make this enamel in our own factory and have perfected it especially for the home owner and amateur painter. It is also used by many contractors for large jobs. Can be used any place where a strictly sanitary, glossy, porcelain like finish is desired on woodwork, walls or furniture. The variety of colors offered makes this enamel attractive to those interested in beautifying their homes. Try one color on the walls and another harmonizing color on the ceiling and woodwork. One gallon will cover approximately 200 square feet, two coats. Apply with a good varnish brush.

30N2152—Cream Gloss Enamel.
30N2154—Pea Green Gloss Enamel.
30N2155—Nile Green Gloss Enamel.
30N2156—Light Blue Gloss Enamel.
30N2159—Pink Gloss Enamel.
30N2160—Lilac Gloss Enamel.
30N2162—Ivory Gloss Enamel.
30N2163—Light Gray Gloss Enamel.
30N2164—White Gloss Enamel.

1-quart can ..... (Shipping weight, 4½ pounds)... **$0.78**
½-gallon can ..... (Shipping weight, 10 pounds)... **1.49**
1-gallon can ..... (Shipping weight, 15½ pounds)... **2.82**

Chinese Gloss Lacquer.

(Colored Varnish.)

Chinese Gloss Lacquer is a special Colored Varnish that makes old, scratched or marred furniture, woodwork or floors look like new with but one or two applications. It can be applied by any housewife, and the finished work will be satisfactory, rich and beautiful. There are no intricate directions to follow, and there is no special mixing to be done. It is put up ready to use.

It is not necessary to remove the original finish. If the woodwork is light, Chinese Gloss Lacquer can be used alone. If the woodwork is dark and a light finish is desired, apply one coat of undercoat, a ground color (listed below) and over this ground color apply whatever shade of Chinese Gloss Lacquer is desired. One gallon will cover 600 square feet one coat.

30N2690—Light Oak.
30N2691—Dark Oak.
30N2692—Mahogany.
30N2693—Cherry.
30N2694—Walnut.
30N2695—Moss Green.

1-pint can ..... (Shipping weight, 2½ pounds)..... **$0.42**
1-quart can ..... (Shipping weight, 4 pounds)..... **.70**
1-gallon can ..... (Shipping weight, 11 pounds)..... **2.34**

Undercoat, or Ground Color.

Ground Color is an opaque yellow paint. It is used as a first coater for Chinese Gloss Lacquer and for graining colors. It completely covers up the original finish and forms a foundation for later finishes. Woodwork that is to be grained should first be painted with Ground Color. If you wish to change the color of your floors or woodwork from a dark to a lighter shade, apply a coat of this ground color, and when dry, as per directions on the can, apply the desired shade of Chinese Gloss Lacquer.

30N2697

1-pint can ..... (Shipping weight, 2½ pounds)..... **$0.35**
1-quart can ..... (Shipping weight, 4 pounds)..... **.63**
1-gallon can ..... (Shipping weight, 11 pounds)..... **2.36**

Porch Furniture Paint.

For Porch, Lawn, Breakfast Room, Sun Parlor and Kitchen Furniture.

Paint your porch furniture, lawn swings, breakfast room furniture and kitchen furniture with our Porch Furniture Paint and make your home radiate cheerfulness and beauty. Our Porch Furniture Paint has a very beautiful appearance, having an enamel like finish. This finish is obtained by using a large percentage of varnish, which also gives the paint a tough, pliable, weather resisting body which will stand up perfectly under the severe wear and weather to which porch and lawn furniture is usually subjected. The Tuscan Red and Park Green are bright, snappy colors and are especially recommended for use on lawn swings, settees, etc. The French Gray and Holland Blue are very attractive and smart colors for breakfast porch, sun parlor and kitchen furniture. Porch furniture painted either gray or blue, with pink cretonne chair coverings, table covers and porch pillars, will make a delightful porch or sun parlor. Gray is always a very pleasing neutral color to use on old kitchen chairs and tables.

30N1680—Holland Blue. **30N1685**—French Gray.
30N1683—Park Green. **30N1687**—Tuscan Red.

30N1689—Ivory.

1-pint can..... (Shpg. wt., 2½ lbs.)..... **$0.34**
1-quart can..... (Shpg. wt., 4¼ lbs.)..... **.63**
½-gallon can..... (Shpg. wt., 10 lbs.)..... **1.20**

Kalsomine Brush.



Kalsomine Brush, white bristles, metal bound; excellent quality.

30N3102

Width, Inches	Length Bristles, Inches	Shpg. Wt., Pounds	Price, Each
6	3¼	2	**$2.03**
7	3½	2	**2.45**
8	3¾	2¼	**3.06**

Elastic Varnish Brush.

All black, pure selected Chinese bristles, very elastic and full, secured in vulcanized rubber.

30N3038

Width, Inches	Length Bristles, Inches	Shpg. Wt., Ounces	Price, Each
2	3	5	**$0.81**
2½	3⅜	6	**1.22**
3	3⅝	7	**1.88**

Peerless Wall Board

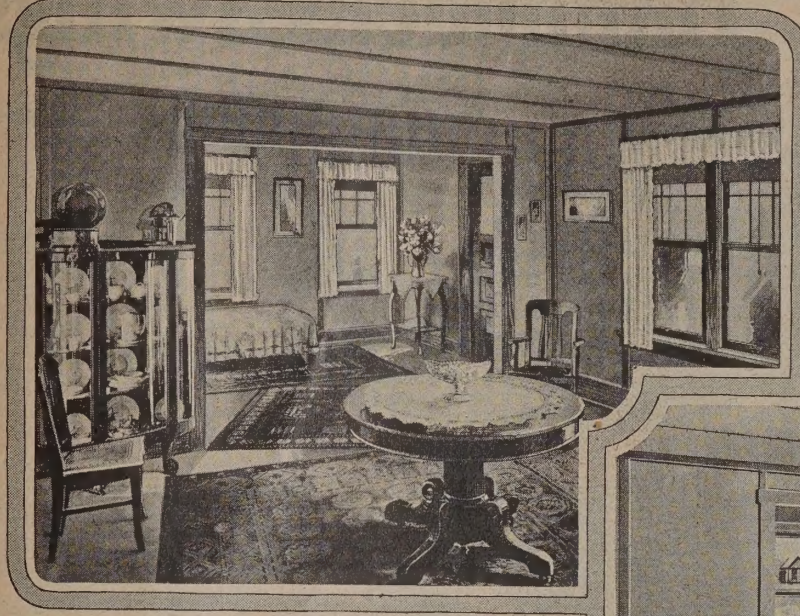

Our Ready Made Buildings can be used with comfort during all seasons of the year by lining them with Peerless Wall Board. The living room illustrated at the left shows the attractive finish produced by this material. After the sheets are nailed to the furring strips and ceiling joists, panel strips are applied. The room is then ready to be painted or kalsomined and stenciled, or it can be left in its natural color unfinished with pleasing effect, as the light brown shade makes a very attractive coloring for both ceiling and side wall.

The illustration to the right shows how simple and easy it is to apply wall board. When ordered in connection with Ready Made Buildings we furnish all pieces cut to fit for full wall sections, for spaces above and below windows and for ceiling lengths. You simply nail the sheets to the studding and joists with 6-penny wire nails. The room is then ready for painting. We recommend a dull or flat finish oil paint.

We furnish plain light brown finished wall board for our Ready Made Buildings at the prices quoted extra in connection with the description of each building. If oak grained wall board is desired, prices will be quoted on request.

The illustration to the left shows the pleasing effect obtained by using oak grained wall board for the lower part of the room as a wainscot, the joints to be covered with wood panel strips. The upper part of the room may be covered with plain Peerless Wall Board. The baseboard, panel strips and door and window casings should be stained or varnished to match the wainscoting.

For the benefit of those who may wish to order Peerless Wall Board, either in plain or grained finish, for other purposes than for lining Ready Made Buildings, we quote prices on regular size sheets as listed below. Wall Board shipped from factory in SOUTHERN OHIO.

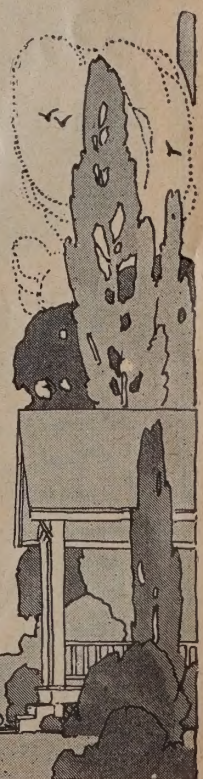

PEERLESS WALL BOARD is made of three layers of heavy cardboard held together by two layers of asphalt. We are selling it for about **5⅓ CENTS PER SQUARE FOOT.** It is used instead of plaster, and can be applied by anyone. Comes in three finishes—plain light brown, quarter sawed oak and Circassian walnut. Plain finish wall board **CAN BE PAINTED ANY COLOR** desired, but most people consider the plain light brown finish very effective. Fine for basements or attics and for dividing large rooms into small ones.

Consider the time you save on any job and the ease with which the work is done when wall board is used instead of lath and plaster. Before the last sheet is applied, the carpenter can put on the trim and the painter can apply the stain or varnish to it—three operations going on at about the same time **without any muss or dirt.** No waiting for plaster to dry and **no dampness** in the building after the work is done. You can put on this wall board right over the studding or apply it to old plaster if you wish. Can be sawed like wood and solidly nailed without danger of splitting. Wall board is furnished in sheets from 8 to 12 feet long, each sheet being 32 inches wide and about 3/16 inch thick. The quarter sawed oak and Circassian walnut finish wall boards need no paint at any time. We furnish Joint Tape in all three finishes to cover the joints, but we recommend the wood panel strips for rooms where a fine effect is desired. Packed in wood crates, guaranteed to reach you in good condition. When ordering give lengths of sheets for side walls and ceilings.

Length, Feet	Width, Inches	Number of Square Feet to the Sheet	Shipping Weight, per Sheet, Crated	48C3014 Finished Like Quarter Sawed Oak. Price, per Sheet	48C3008 Finished Like Circassian Walnut. Price, per Sheet	48C3010 Plain Finish. Price, per Sheet
8	32	21⅓	17 lbs.	**$1.17**	**$1.18**	**$1.14**
9	32	24	19 lbs.	**1.31**	**1.32**	**1.28**
10	32	26⅔	21 lbs.	**1.46**	**1.47**	**1.42**
11	32	29⅓	23 lbs.	**1.60**	**1.61**	**1.56**
12	32	32	25 lbs.	**1.75**	**1.76**	**1.70**

Panel Strips, shipped with Peerless Wall Board { **48C7922—Yellow Pine.** Price, per 100 feet. . **$1.70** / **48C7923—Plain Red Oak.** Price, per 100 feet. . **2.55**
Shipping weight—Yellow Pine, 12 pounds per 100 feet; Plain Red Oak, 18 pounds per 100 feet.

Joint Tape (for covering joints). Ready to apply. Coated with glue on one side.

48C2950—Plain Brown Finish
48C2951—Oak Finish
48C2952—Walnut Finish
Price, per roll, 100 feet **25c**
Order by number.

Hammocks, Swings

This Charming Design, $7.00

Made from cotton, closely woven in a strong double fabric, capable of great strength and endurance. Made in a very striking pattern with dark colors predominating. Tab end finish. Fitted with a large fringed curtain and large upholstered throwback pillow, trimmed with tassels, as illustrated. Size, 83x40 inches. Heavy white rope ends, varnished wood spreaders, galvanized rings. Shipping weight, 9 pounds.

6C5101¼—Price $7.00

Our De Luxe Hammock.

Our highest grade Hammock. Constructed of a good weight cotton, Jacquard pattern. It is of a soft weave, yet strong. The design is enhanced by the unique manner in which the many colors are blended. Fitted with a 10-inch upholstered throwback pillow and a concealed hardwood spreader. Deep curtain, tab end finish, with heavy ropes. Wood spreader at head and foot. Size of hammock, 78x38 inches. Shipping weight, 7 pounds.

6C5102¼—Price $8.25

Our Challenge Leader Hammock.

It is made from a good weight plain weave fabric in a dark plaid effect. The firmly twisted yarn used in this hammock gives it good wearing qualities. It has a full fringed curtain and a 9-inch throwback tufted pillow with tab ends. Good weight rope, varnished wood spreaders. Size of hammock, 78x37 inches. Our price represents good value. Shipping weight, 6½ lbs.

6C5104¼—Price $4.15

Folding Wood Lawn Settee.

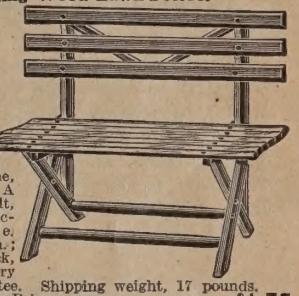

Selected hardwood; frame painted in a fast color red and well varnished; slats varnished in natural finish. The seat and back pieces are screwed to frame, not nailed. A strongly built, unusually attractive settee. Length, 42 in.; height of back, 18 in. A very high grade settee. Shipping weight, 17 pounds.

6C5484¼—Price $1.75

Our Lexington Special.

Plain or canvas weave Hammock. A very substantial, tight weave. Has the strength of duck. It is a large hammock, being 82 inches long by 40 inches wide. It will be found very pleasing in both pattern and color and is a hammock that we highly recommend. It has a good size curtain and a tufted throwback pillow. Shipping weight, 6½ pounds.

6C5112¼—Price $4.98

A Plain Weave Hammock.

A plain or canvas weave in good, substantial colors, but of lighter weight fabric than our **6C5104¼** and **6C5112¼**. Fitted with an 8⅛-inch tufted throwback pillow, 7½-inch fringed curtain, tab ends. Varnished wood spreaders. This hammock measures 76 inches long by 34 inches wide. It is one that represents a very excellent value at our low price. Shipping weight, 6 pounds.

6C5103¼—Price $2.55

Our Giant Wood Lawn Swing.

This swing is made of selected straight grain wood. All connections and braces are fastened with bolts and nuts. Fitted with adjustable back and arm rests. This is an extra large, roomy, comfortable swing with plenty of space between the seats. It will comfortably seat four adults or six children. The slats in the seats, backs and foot rest are strong and securely fastened. The derrick or upright frame is 8½ feet high and occupies a space 64x100 in. The seats are 33 in. wide and 14 in. deep. The frame is painted a bright red, while the hangers, seats and foot rest are thoroughly varnished in a natural wood finish. This is an attractive, strongly built swing. Shipped from factory in CENTRAL INDIANA or NORTHERN MICHIGAN Shipping weight, 140 pounds.

6C5902⅓—Price, without canopy.....$ 8.85

6C5903⅓—Price, with canopy..... 13.75

Fancy Weave Hammock.

Medium weight fancy weave Hammock; dark colors predominating in body, stripes of various bright colors. Fitted with good size pillow and wood spreaders. A strong hammock. It folds up compactly and makes an excellent article for camp. Size of hammock, 6 feet long, 32 inches wide. Weight, 3¼ pounds. Shipping weight, 4 pounds.

6C5119¼—Price $1.98

Knitted Hammocks.

Our Children's Hammock. Also suitable for babies. Heavy white seine twine, knitted by hand and made with sufficient slack so that the child will not roll out. Full length, 8½ feet; length of bed, 5 feet. No spreaders. Shipping weight, 1⅛ pounds.

6C5109—Price $1.65

Double Knitted Hammock. Knitted by hand of white double seine twine, forming a 2-inch square mesh. The edge on each side is chain braided and interwoven into the meshes, making a strong, substantial hammock. Entire length of hammock, about 13 feet; bed measures about 7 feet long. No spreaders. Shipping weight, 2 pounds.

6C5110—Price $2.70

Roller Porch Swing. Four-Passenger.

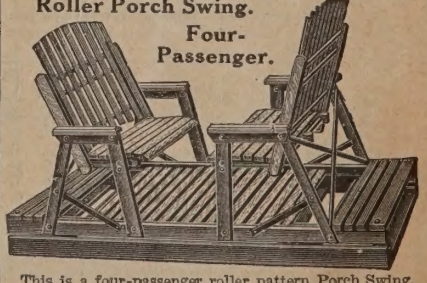

This is a four-passenger roller pattern Porch Swing. It is easy running and noiseless. The frame is 7 feet long and 3 feet wide, and rests on 6-inch metal rollers which run on iron ways on inside of base. Seats are 33 inches wide, 14 inches deep, with high back made of heavy, strong slats, finished in natural wood. Space 3x11 feet required for full movement. Frame is painted red and varnished. Shipped direct from factory in CENTRAL INDIANA. Shipping weight, 100 pounds.

6C5900⅓—Price $13.00

Hammock Chains.

Weather resisting hammock and couch chains with hook at both ends. Length, 6 feet. Weight, per pair, 2¾ pounds. Shpg. wt., 3 lbs.

6C5130 Per pair....55c

Hammock Rope.



About 5½ feet long, with adjustable anchor fastening that stays where you place it; no knots to tie after attached to hammock; no slipping. Hammock can be raised and lowered in an instant. Shipping weight, 14 ounces.

6C5129 — Price, per pair 25c

Porch Swing Chains.

A weather resisting chain that can be used on most styles swinging porch settees or swings, but not adapted for hammock couches. Easily attached. Length, 8 feet. Furnished with two ceiling hooks. Weight, per pair, 4¾ lbs. Shpg. wt., 5 lbs.

6C5128—Per pair...$1.14

Steel Coil Springs.

To connect to supporting chains on hammock couches, porch swings, etc. Black enamel finish. Shipping weight, small, 3½ pounds; large, 5 pounds.

6C5126—Medium size. Price, per pair.....55c

6C5127—Large size. Price, per pair.....$1.10

Hammock Hook.



Tinned, ⅝ inch in diameter. To screw in. Shpg. wt., 10 oz.

6C5136 Price, per pair 15c

Hammock Hook.



Tinned, ⅝ inch in diameter. To fasten with screws. Shipping weight, 11 oz.

6C5137 Per pair....17c

Grass Porch or Lawn Seats.

Made of Japanese woven grass. Excellent seats for porch, stairs or lawn. Weight, 10 ounces. Shipping weight of two, 1¼ pounds.

6C5146—Price, 2 for.21c

Outdoor Furnishings

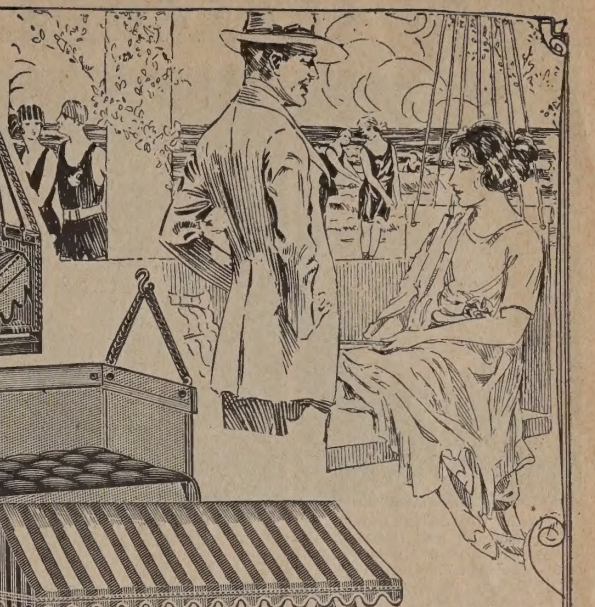

Hammock Couch, $13.75

Couch is 72 inches long and 28 inches wide. Made with a drop frame of 1½-inch angle steel. Covered with a full tufted mattress of a good grade dark tan drill with fancy scalloped curtain, adjustable head rest, which is supported by six double sets of cord, and a chain reinforcement as well. Another feature is the padded top rail or back rest. This back rest can also be adjusted up and down or forward and backward, making it possible to adjust the back to suit the comfort of any size person. Shipping weight, 75 pounds. (For stand and canopy see 6C5918¼ and 6C5915¼, listed below.)

6C5914¼—Hammock Couch. Price.....**$13.75**

6C5920¼—Above couch fitted with folding steel legs. Shipping weight, 85 pounds. Price.....**$14.95**

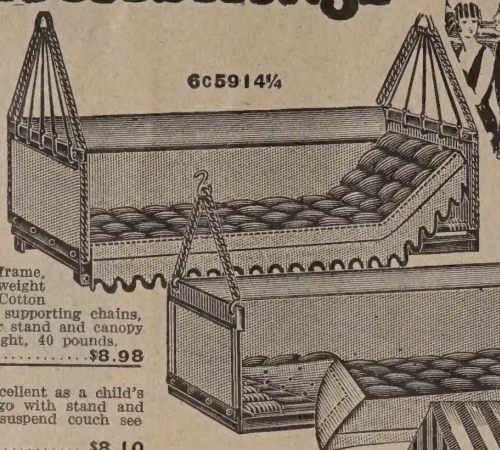

6C5914¼

Hammock Couch, $8.98.

Couch is 6 feet long and 26 inches wide. Plain steel frame, fitted with steel springs. End pieces are made of good weight dark tan canvas, and mattress of cotton twill to match. Cotton twill back rest. Tops of end pieces, where fastened to supporting chains, constructed with an iron crossbar under the canvas. (For stand and canopy see 6C5918¼ and 6C5915¼, listed below.) Shipping weight, 40 pounds.

6C5912¼—Price.....**$8.98**

Small Size Couch.

Size, 5 feet by 22 inches. For small porches. Also excellent as a child's couch. Same construction as above. Not suitable to go with stand and canopy 6C5918¼ and 6C5915¼. (For extra chains to suspend couch see 6C5130 on page 974.). Shipping weight, 30 pounds.

6C5911¼—Price.....**$8.10**

Our Park or Lawn Settee.

Hardwood slats and channel steel frame. Very strong. Just the thing for parks and lawns. Frame painted black, slats natural finish. Packed flat. Shipped from factory in SOUTHERN WISCONSIN.

	Length	Shpg. Wt.	Price
6C5485⅓	4 feet	40 lbs.	**$3.75**
6C5486⅓	5 feet	45 lbs.	**4.35**
6C5487⅓	6 feet	50 lbs.	**4.95**

Fulton Adjustable Window Awnings.

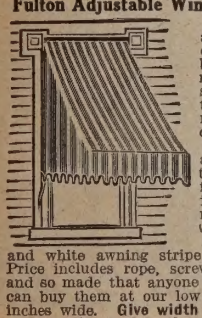

Manufactured and sold by us exclusively. Can be shipped immediately from stock. The particular points of merit are the quick adjustment (in width only at the side arms), the rigidity of the frame, the quality of the material used and the workmanship. Made of blue and white awning stripe duck with scalloped curtain. Complete, ready to hang up. Price includes rope, screws and cleat. These awnings are very simple in construction and so made that anyone can readily put them up. Don't be without awnings when you can buy them at our low prices. Five sizes, to fit windows 2 feet 4 inches to 4 feet 6 inches wide. **Give width of your windows from center to center of casing on each side and specify number of awning wanted. Be sure to order awning wide enough.**

6C5981¼—No. 1 Awning will fit any window from 2 feet 4 inches to 2 feet 7 inches. Weight, 6½ pounds. Price.....**$4.50**

6C5982¼—No. 2 Awning will fit any window from 2 feet 8 inches to 3 feet. Weight, 6¾ pounds. Price.....**$4.65**

6C5983¼—No. 3 Awning will fit any window from 3 feet 1 inch to 3 feet 6 inches. Weight, 7 pounds. Price.....**$4.95**

6C5984¼—No. 4 Awning will fit any window from 3 feet 7 inches to 4 feet. Weight, 7½ pounds. Price.....**$5.30**

6C5985¼—No. 5 Awning will fit any window from 4 feet 1 inch to 4 feet 6 inches. Weight, 8 pounds. Price.....**$5.60**

This Outfit, $22.00 Complete.

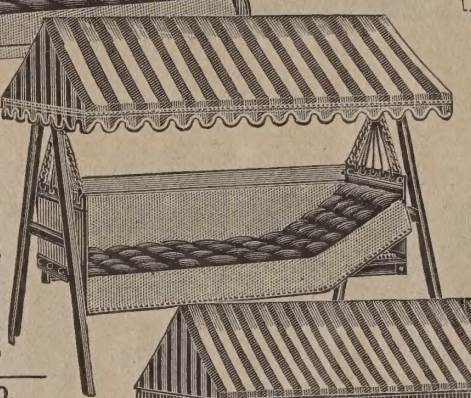

Constructed with a steel frame, fitted with non-rust metal springs, coil springs at end. Full tufted dark khaki color mattress. Strong back rest which can be easily taken off and put on, as desired. End chain supports secured in such a manner as not to pull from the canvas. Adjustable head rest. Length of couch, 72 inches; width, 27 inches. The stand is made of 1¼-inch angle iron in a green finish. Length of stand, 87 inches; height, 75 inches; width at base, 48 inches. Canopy of regular awning stripe duck. Fitted over an iron and wood frame.

6C5926¼—Hammock, Stand and Canopy, as described. Shipping weight, 110 pounds. Price.....**$22.00**

6C5923¼—Couch only, as described above. Shipping weight, 55 pounds. Price.....**$10.65**

6C5918¼—Hammock Couch Stand only, as described above. Shipping weight, 45 pounds. Price.....**$4.15**

6C5915¼—Hammock Couch Canopy only, as described above. Shipping weight, 11 pounds. Price.....**$7.55**

If extra chain is wanted to suspend couch from ceiling, see 6C5130 on page 974.

Our High Grade Hammock Couch, $35.00.

One of the latest styles on the market. Made with a patented adjustable spring back rest. Made same as the bed of couch. Couch is built of strong steel drop frame and is heavily constructed throughout. Size of bed, 6 feet 3 inches long and 2 feet 4 inches wide. Covering is made of 8-ounce army duck, tan color, with green print stripes. Back rest and mattress are well tufted. Fringe and end ropes are of green color. This couch is unusually striking in design and trim. Canopy is made of same material as the couch, trimmed around edge with green fringe. Has wood and steel frame. Stand is made of 1½-inch angle iron, green finish.

6C5905¼—Couch, Stand and Canopy complete. Shipping weight, 160 pounds. Price.....**$35.00**

6C5906¼—Couch only. Shipping weight, 110 pounds. Price. **24.50**

6C5907¼—Couch with folding iron legs added. Shipping weight, 120 pounds. Price.....**$25.70**

6C5909¼—Canopy only. Shipping weight, 15 pounds. Price. **6.90**

6C5918¼—Stand only. Shipping weight, 45 pounds. Price. **4.15**

6C5910¼—Pillow to match. Size, 24x24 inches. Shipping weight, 4½ pounds. Price.....**$3.00**

Bent Wood Settee.

Constructed of selected beech and elm. Thoroughly coated throughout with a high grade red paint, well varnished, giving this settee an unusually attractive appearance. Bolted frame, strongly braced. A special feature is the rounded or shaped back and seat, which add greatly to the comfort of the settee. Length, 48 in.; height of back, 18 in. Ideal for porch, lawn or indoor use. Shipping weight, 24 pounds.

6C5483¼—Price.....**$5.40**

Steel Slat Settee.

Ideal for outdoor use. Full size, well built, strongly braced, nicely finished in green paint. Built of ⅞x⅜-inch steel. Braces, 1x¼-inch flat steel. Shipped from factory in OHIO VALLEY.

6C5488⅓—4 feet long. Shpg. wt., about 70 pounds. Price.....**$6.00**

6C5489⅓—5 feet long. Shpg. wt., about 80 pounds. Price.....**$7.75**

Porch Curtains.

Plain white or striped duck. Furnished complete with pulleys, ropes, roller, etc., ready to attach. By pulling the rope you revolve roller, the curtain being raised or lowered as desired. When ordering give height, A to B (see illustration), and width, B to C. We sell these curtains by the square foot, the price per square foot including all accessories. A curtain 7 feet high and 10 feet wide contains 70 square feet, and at 11 cents per square foot would cost $7.70 when **made to order.** Not shipped C. O. D. Allow four to six days to make and **be sure to state which measurement is height and which is width, also color wanted.**

MADE TO ORDER.

6C7677½—8-ounce white duck. Price, per square foot.....**11c**

6C7664½—Blue and white striped duck. Price, per square foot.....**15c**

6C7665½—Brown and white striped duck. Price, per square foot.....**15c**

CARRIED IN STOCK.

The following sizes carried in stock ready for immediate shipment. **State size.**

6C7673¼—Plain white only, 8-oz. duck.

Height	Width	Shpg. Wt.	Price
6 ft.	6 ft.	9 lbs.	**$3.85**
6 ft.	8 ft.	12 lbs.	**5.15**
7 ft.	7 ft.	10 lbs.	**5.25**
7 ft.	9 ft.	14 lbs.	**6.75**
8 ft.	8 ft.	14 lbs.	**6.85**
8 ft.	10 ft.	21 lbs.	**8.60**



Split Bamboo Porch Curtains.

Split bamboo, outside bark, natural color. Slats about ½ inch wide. Furnished complete with good quality rope and pulleys. Come only in sizes listed. **State size.** Shipping weight, about 5½ ounces per square foot.

Catalog No.	Width B to C	Length B to A	Price, Each
6C5975¼	6 feet	6 feet	**$2.38**
6C5976¼	6 feet	8 feet	**3.17**
6C5977½	8 feet	8 feet	**4.22**
6C5978¼	10 feet	8 feet	**5.28**

Store and Porch Awnings.



Following prices are for awnings made of plain white, blue and white or brown and white striped duck. **State size, also if to be fastened to wood or brick building.** Allow four to seven days to make; in June and July allow seven to ten days. Not shipped C. O. D. For lettering awnings allow four days extra.

All exposed metal parts are japanned or galvanized. Awnings 7 feet or less in width are made with a one-piece iron frame across front; over 7 feet, wood front. We will be pleased to quote on any sizes not shown in the following list. The prices quoted herewith are for awnings complete, ready to be set up.

6C7653½—Blue and white striped duck. **6C7654½**—Brown and white striped duck. **6C7655½**—Plain white 10-ounce duck.

Height From 1 to 2	Projection From 2 to 3	Width of Front—From 3 to 4					
		10 Feet	12 Feet	14 Feet	16 Feet	18 Feet	20 Feet
4 ft.	4 ft.	$17.89	$19.97	$21.62	$23.43	$25.52	$27.55
4 ft. 6 in.	4 ft. 6 in.	19.54	21.62	23.43	25.52	27.55	29.87
5 ft.	5 ft.	21.19	23.27	25.30	27.40	29.65	32.92
5 ft. 6 in.	5 ft. 6 in.	23.40	25.52	27.38	29.87	32.70	35.40
6 ft.	6 ft.	25.74	27.48	29.80	32.70	35.62	38.45

If cover only is wanted, deduct 20 per cent, or one-fifth, from the above prices, and state whether for wood or iron front bar. Lettering roof of awning, 10 cents a letter extra. Lettering on curtain, 7 cents a letter extra.

OIL PORTABLES

BRASS READING LAMP.
Our finest all brass lamp. This lamp is made of fine quality spun brass in full brush (satin) brass finish, with large wide base; 10-inch steel brass plated shade ring. Complete with 13-inch mushroom shape, white lined, green glass shade, No. 2 center draft burner, chimney and wick. Ht., 23 in. Wt., packed, 28 lbs.
35C736—Price **$9.45**

PANELED GLASS PARLOR LAMP.
Made of opalescent glass decorated in ruby color Nouveau Art design; 13-inch paneled shade with 4-inch crystal beaded fringe. Embossed openwork footed brass finished base. 10-inch shade ring. Polished brass removable oil pot. Success center draft burner, chimney and wick. Height, 24 inches. Weight, packed, 30 pounds.
35C989—Price **$10.25**

MAHOGANY FINISH WOOD LAMP WITH CRETONNE SHADE.
The pedestal and 7-inch base are made of wood in mahogany finish. The 14-inch Empire shape shade is made of flowered cretonne and trimmed with fancy galloon braid and 2½-inch silk fringe. Fitted with metal fount in oxidized copper finish. No. 3 brass and steel burner, chimney and wick. Height, 24 inches. Weight, packed, 10 pounds.
35C1004—Price **$9.45**

ART GLASS BRASS LAMP.
Pedestal is made of brush (satin) brass with a large, heavily weighted spun brass base. 13-in. crowned shade made of amber cathedral art glass mounted in a cut-out metal openwork frame finished in brush (satin) brass, 4-inch green color bead fringe. Brass fount, No. 3 burner, chimney and wick. Height, 25 in. Wt., packed, 30 lbs.
35C1003—Price ...**$10.98**

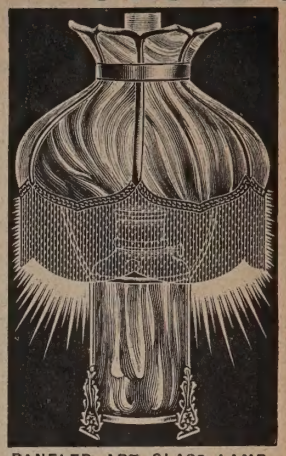

PANELED ART GLASS LAMP.
The 5-inch round footed pedestal is made of curved green cathedral art glass panels mounted in fancy embossed brush (satin) brass finish framework. The 13-inch six-panel green art glass crowned shade is fitted with a 4-inch green bead fringe. Equipped with Royal center draft burner, removable oil pot, burner, chimney and wick. Height, 22 inches. Weight, packed, 45 pounds.
35C993—Price **$13.25**

ART GLASS PIANO OR FLOOR LAMP.
The steel standard is covered with solid brush (satin) brass tubing with weighted 10-inch brass base. The 14-inch hexagonal shape is made of steel in a brush (satin) brass finish, fitted with six shade panels and six curtain panels of green art glass with 4-inch green bead fringe. Shade is supported by three steel brass plated arms. No. 2 center draft burner, detachable brush (satin) brass oil fount, chimney and wick. Gives a very soft and mellow light; ideal for reading. Height, 60 inches. Weight, packed, 60 pounds.
35C857—Price **$20.65**



ROCHESTER READING LAMP.
Made in brass, richly nickel plated, with heavy ornamental base and No. 2 center draft burner. Fitted with 10-inch white opal glass shade, chimney and wick. Height, 20 in. Weight, packed, 10 lbs.
35C734
Price **$3.95**
Same as 35C734, but fitted with 10-in. white lined green shade.
35C735
Price **$4.75**

BELGIAN BURNER PARLOR LAMP.

Simplicity and Durability.

Smokeless and Odorless.

Minimum Oil Consumption.

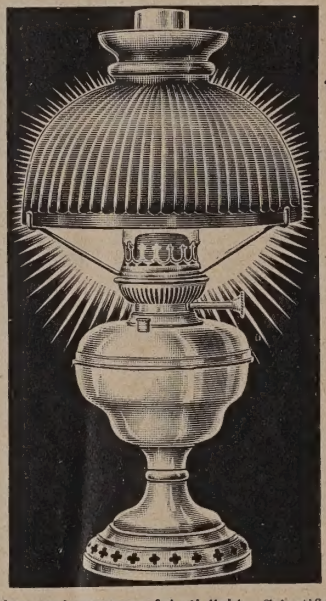

Tulip Shape White Flame.

Steady Brilliant Light.

High Candle Power.

35C763
Belgian Reading Lamp With 10-Inch White Fluted Shade.
Price.**$6.75**

35C764
Belgian Reading Lamp With 10-Inch Green Fluted Shade.
Price.**$7.75**

An absolutely clean and very powerful oil light. Scientifically constructed. The fount is made of heavy gauge spun brass in brush (satin) brass finish. It is fitted with the celebrated No. 1 Belgian center draft burner, which produces a large tulip shape, smokeless, odorless and powerful steady white flame. The lamp is simple, durable, efficient and economical to maintain. There are no complicated parts to get out of order. **The ideal lamp for reading or sewing.** Fitted with No. 1 Belgian chimney and wick. Height, 21 inches. Weight, packed, 10 pounds.

FULL TINTED PARLOR LAMP.
The 9-inch globe and fount holder are made of opalescent glass and are tinted a deep red shading to pink and are decorated with large red and white peonies in natural colors. No. 2 removable center draft fount, burner, chimney and wick. Fancy gilt metal openwork base. Height, 24 in. Wt., packed, 20 lbs.
35C961
Price **$7.95**

MAHOGANY FINISH WOOD PIANO OR FLOOR LAMP.
The standard is made of wood in a rich dull mahogany finish with 13-inch base. Fitted with a 24-inch Tudor shape scalloped edge shade, made of old gold silk warp poplin with white silk warp mull lining and trimmed with fancy galloon braid. It has a scalloped 3½-inch silk fringe. No. 2 center draft burner, detachable brass fount, burner, chimney and wick. A very handsome and attractive oil lamp. Height, 75 inches. Weight, packed, 35 pounds.
35C859—Price **$21.98**

ELECTRIC TABLE LAMPS

MAHOGANY FINISH ELECTRIC TABLE LAMP.
Height, 27 in. Base, 8½ in. in diameter. Birch standard in dull mahogany finish. Delft blue silk shade, 20 inches in diameter, with 3-inch scalloped curtain with alternating panels of plain blue and fancy figured silk. Lined with rose color sateen and trimmed with fancy plaid and 3½-inch blue silk fringe and black tassels. Complete with two chain pull sockets, 5 feet of silk cord and plug. Weight, 25 pounds.
34C8157—Price, complete.....**$19.98**

METAL OVERLAID ELECTRIC TABLE LAMP.
Height, 22 in. Shade, 18 in. in diameter. Antique bronze and burnished gold finish. Heavy metal base ornamented in leaf design and reeded standard, supporting an eight-panel metal overlaid shade. The shade is fitted with amber color art glass overlaid with an artistic metal tracery in classic urn and lotus leaf design. Complete with two chain pull sockets, 6 feet of silk cord and plug. Weight, 40 pounds.
34C8154—Price, complete **$16.49**

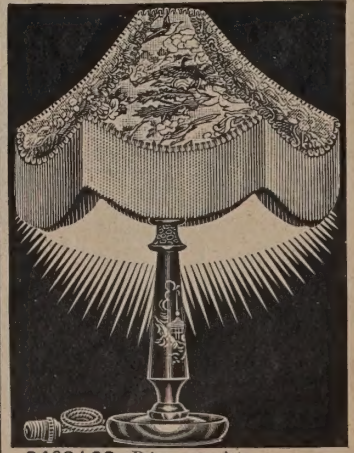

JAPANESE DESIGN ELECTRIC TABLE LAMP.
Height, 27 in. 8 inches in diameter. Ebony finished birch standard, hand decorated in Japanese colored scenery design. Six-panel 21-inch silk warp tussah pagoda shade of figured Japanese design in variegated colors. Lined with rose color silk and trimmed with blue braid and 4-inch blue chenille fringe. Complete with one key socket, 5 feet of silk cord and plug. Weight, 25 pounds.
34C8160—Price, complete **$21.59**

For a More Complete Assortment of Electric Table Lamps, Floor Lamps and Lighting Fixtures for All Purposes, Write for Our Lighting Fixture Catalog.

HANGING LAMPS

METAL OVERLAID ART GLASS DOME LAMP.

Eight-panel dome shade. 22 inches in diameter. Made of curved amber color cathedral art glass set in a metal frame and overlaid with metal openwork in a fancy scroll design. 4-inch green beaded fringe. The framework, ceiling canopy, chain, smoke bell, etc., are brush (satin) brass finish. Fitted with No. 2 Royal center draft detachable brush brass oil fount, chimney and wick. Length, 64 in. Wt., pkd., 70 lbs.

35C774—Price $22.50

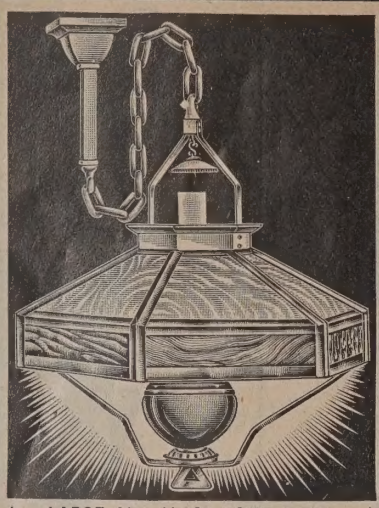

LARGE ART GLASS DOME LAMP.

A large 23-inch hexagonal dome shade, composed of six amber color shade panels and six curtain panels of mottled Turkish colored art glass, mounted in a steel brass plated frame. The framework and brass ceiling canopy, chain, smoke bell, etc., are brush (satin) brass finish. Fitted with No. 2 Royal center draft brush brass oil fount, chimney and wick. Length, 64 in. Wt., pkd., 45 lbs.

35C781—Price $17.95

PANELED ART GLASS DOME LAMP.

Large 22-inch eight-panel crowned dome shade of curved green cathedral art glass, mounted in metal frame with 4-inch green beaded fringe. Framework, ceiling canopy, chain, smoke bell, etc., in brush (satin) brass finish. Fitted with No. 2 Royal center draft brush brass oil fount, chimney and wick. Length, 64 inches. A very popular library or dining room lamp. Wt., pkd., 65 lbs.

35C786—Price $18.45

HANDSOME ART GLASS DOME LAMP.

Extra large 22-inch dome shade. Composed of six amber color art glass panels mounted in steel brass plated frame and extra deep 5-inch curtain, consisting of six green art glass panels overlaid with a neat brass plated scroll design. The framework, brass ceiling canopy, chain and smoke bell are brush (satin) brass finish. Fitted with No. 2 Royal center draft brush brass oil fount, chimney and wick. Length, 64 in. Wt., pkd., 45 lbs.

35C795—Price $19.75

"SUNBURST" LAMP.

Brass extension frame. Brass fount, with embossed gold finish ornament, embossed brass shade band, crown, collar, smoke bell and ceiling plate. Thirty fancy glass prisms. Removable brass oil pot with center draft burner, No. 2 Rochester wick and chimney and 14-inch dome shade, decorated with American Beauty roses. Automatic extension, 28 to 65 in. Wt., pkd., 40 lbs.

35C818—Price $18.45

Same as 35C818, with plain shade.

35C817—Price $16.98

"MIDNIGHT SUN" LAMP.

Brass extension frame. Embossed brass shade band, crown, collar, smoke bell and ceiling plate. Thirty fancy glass prisms, 14-inch decorated dome shade, decorated opal glass fount. No. 3 Regal burner. Electric chimney, No. 3 wick. Automatic extension, 28 to 65 in. Wt., pkd., 40 lbs.

35C798—Price $13.85

Same as 35C798, but fitted with 14-inch white opal glass dome shade and crystal glass fount.

35C797—Price $12.75

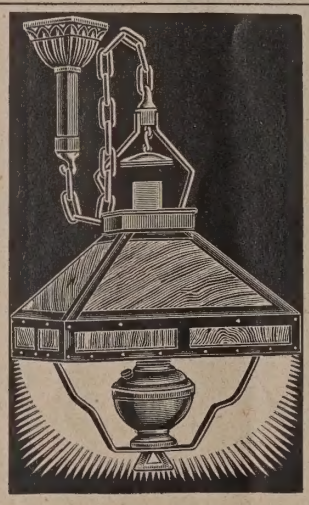

MISSION ART GLASS LAMP.

This very attractive Library or Dining Room Lamp has a square 16-inch dome shade and curtain, composed of 12 green cathedral art glass panels in metal frame. Framework, ceiling canopy, chain, smoke bell, etc., are in dull (matte) black finish. Fitted with a No. 2 Royal center draft fount, chimney and wick. Length, 64 inches. Weight, packed, 40 pounds.

35C782—Price $14.50

"SUN'S RAYS" LAMP.

Richly Ornamented Brass Extension Lamp. Fancy embossed brass crown, collar, smoke bell, ceiling plate and shade band. Thirty fancy glass prisms, 14-inch opal glass dome shade, richly tinted and decorated with flowers; opal glass fount holder decorated to match. Embossed removable brass oil pot, No. 2 center draft burner, No. 2 Rochester chimney and wick. Automatic extension, 28 to 65 in. Weight, packed, 40 pounds.

35C829—Price $17.50

"EVENING STAR" LAMP.

Fancy embossed brass extension frame, with embossed brass crown, smoke bell and ceiling plate, fitted with 14-inch dome shade, decorated with wild flowers entwined about a rustic bough in natural colors, decorated removable opal glass fount, No. 3 Regal burner. No. 2 Electric chimney and No. 3 wick. Automatic extension, 28 to 65 in. Wt., pkd., 35 lbs.

35C811—Price.$9.15

Same as 35C811, but fitted with 14-inch plain white opal glass shade and crystal glass fount.

35C810—Price.$8.00

ELECTRIC DOME LIGHTS

TWO-LIGHT ART GLASS ELECTRIC DOME LIGHT.

Length to bottom of dome, 54 inches. Diameter of dome, 20 in. Genuine brass ceiling canopy, 4½ inches in diameter, and solid brass round link chain in brush (satin) brass finish. Six-panel metal overlaid dome, fitted with amber color art glass and border panels with sunset color glass, overlaid with cut out metal. Wired with silk cord laced through the chain, fitted for two electric lights, with chain pull sockets inside of dome.

34C8580½—Price, complete $19.98

ONE-LIGHT ART GLASS ELECTRIC DOME LIGHT.

Length to bottom of dome, 54 inches. Diameter of dome, 21 in. Genuine brass ceiling canopy, 5 inches in diameter, and solid brass round link chain in brush (satin) brass finish. Eight-panel shade fitted with green art glass and 4-inch scalloped curtain of variegated colored art glass panels, surmounted by an art glass crown. Wired with silk cord laced through the chain, fitted for one electric light with key socket inside of dome.

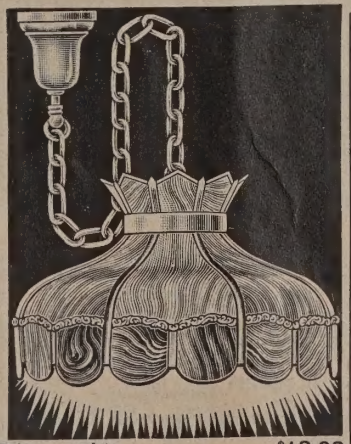

34C8574½—Price, complete.....$18.98

ONE-LIGHT ART GLASS ELECTRIC DOME LIGHT.

Length to bottom of dome, 60 inches. Diameter of dome, 16 inches. Metal parts dead black finish. Square ceiling canopy, 4½ inches in diameter. Round link iron chain supporting a square Mission dome with amber color art glass panels and 2½-inch curtain with green art glass panels. Completely wired with black silk cord and chain pull socket.

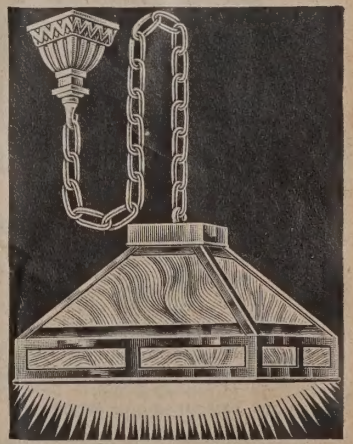

34C8562½—Price, complete $10.65

For a More Complete Assortment of Electric Dome Lights, Portable Lamps and Lighting Fixtures for All Purposes, Write for Our Lighting Fixture Catalog.

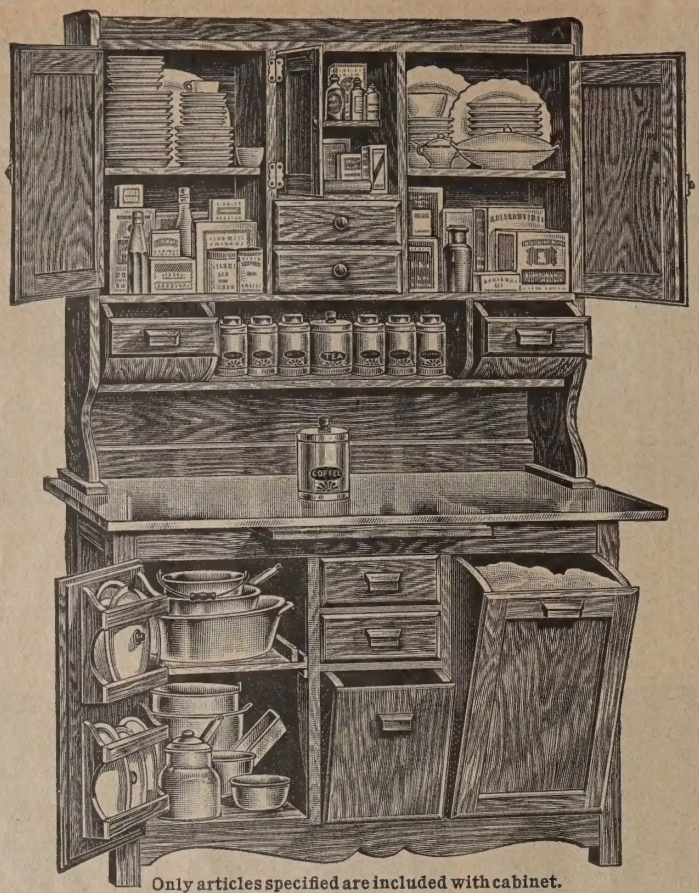

Only articles specified are included with cabinet.

Wilson Kitchen Cabinet. With its many drawers, bins, cabinets and shelves, this is a most convenient kitchen cabinet. You can readily see what a big help such a cabinet will be in your kitchen. It will save hours of time and miles of steps. Our low prices make it a most attractive bargain. Made of seasoned oak, light dull golden finish. Height, 74 inches; stationary top of base, 26x46 inches. Choice of white basswood or metal covered top, as noted in the price list. All drawers and bins removable for cleaning. Strong, sturdy construction. Complete set of tea, coffee and spice cans with tight fitting caps. Removable work board with two surfaces. Shelf in base cupboard slides out. The metal covered top is made by drawing a sheet of bright finished metal tightly over the wood top. Shipped from factory in ROCKFORD, ILL. Shipping weight, about 240 lbs.

IC2152⅓

With white basswood top.....$39.85
With metal covered top.....42.85

Supreme Comfort.

Nine Soft Springs in Seat.

This is a most popular and desirable design of overstuffed rocker. Sometimes called the English Fireside design, with the broad wings on the back typical of this style. The frame is made of seasoned hardwood, exposed parts finished in imitation mahogany, dull rubbed finish. Heavy wings on back and well stuffed arms. Back contains **eight** pillow springs. The seat contains **nine** deep cone shape springs and in size is about 20x22 inches. Height of back from seat, about 27 inches. Shipped set up in a strong wood crate. Shipping weight, about 80 pounds.

IC1473

Price, tapestry.....$39.95
Price, artificial leather, brown Spanish grained.....29.65
Price, genuine leather, brown Spanish grained.....52.95

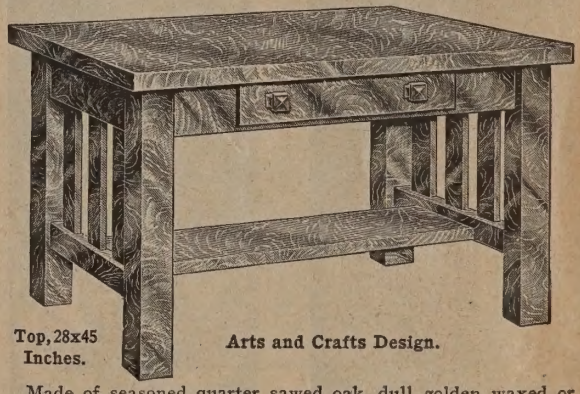

Top, 28x45 Inches.

Arts and Crafts Design.

Made of seasoned quarter sawed oak, dull golden waxed or fumed finish. Plank top, 28x45 inches, 1⅝ inches thick on edge, veneered with quarter sawed oak. Wood knobs. Steel sliding casters. Shipped knocked down from factory in ROCKFORD, ILL. Shipping weight, about 120 pounds.

IC3455⅓

Price, dull golden waxed finish.....$29.65
Price, fumed finish.....29.75

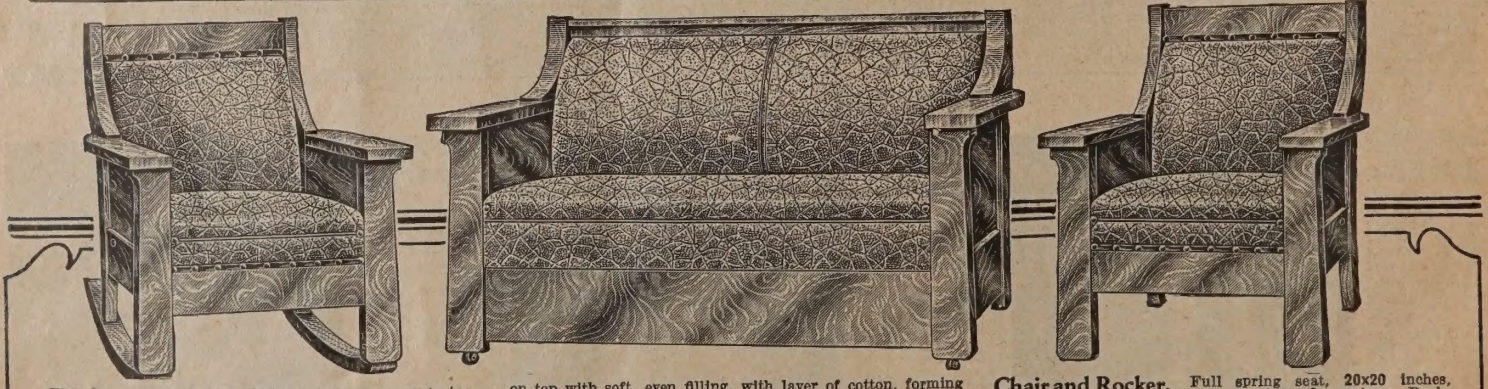

This is a plain modern design in the best of taste; strong, lasting and serviceable, as well as attractive. With an Arts and Crafts library table to match, you have almost complete furnishing for the living room or parlor.

The Construction. Frames made of seasoned oak with the top, arms, front legs, and front rails faced with quarter sawed oak veneer. Rubbed and polished golden or brown fumed finish, as desired. Full spring seats throughout. Springs covered on top with soft, even filling, with layer of cotton, forming a soft, firm foundation for the upholstery covering.

De Luxe Bed Davenport. Length, outside, 61½ in. Length, between arms, 52½ inches. Height of back from seat, 19½ inches. Size open as a bed, 48x72 inches. Seat contains **eighteen** steel coil cone shape springs. **Be sure to order pad mattress for davenport.** See our Big Catalog.

Chair and Rocker. Full spring seat, 20x20 inches, each containing **five** springs. Backs 21 inches high from seats. Entire height, 37 inches.

Shipped knocked down from factory near CHICAGO or CENTRAL NEW YORK. Shipping weights, De Luxe davenport, about 250 lbs.; rocker and chair, each, about 60 lbs.

Any of these pieces may be purchased separately.

IC1652⅓	Artificial Leather, Black		Artificial Leather, Brown Spanish Grained		Paramount Leather Substitute		Genuine Leather, Black		Genuine Leather, Brown Spanish Grained	
De Luxe	Golden	Fumed	Golden	Fumed	Black Golden	Brown Fumed	Golden	Fumed	Golden	Fumed
Davenport	$44.85	$44.95	$45.35	$45.45	$48.50	$49.10	$63.00	$63.10	$63.50	$63.60
Arm Chair	14.35	14.40	14.55	14.60	15.75	16.00	21.50	21.55	21.70	21.75
Rocker	14.45	14.50	14.65	14.70	15.85	16.10	21.60	21.65	21.80	21.85
Complete Set	73.65	73.85	74.55	74.75	80.10	81.20	106.10	106.30	107.00	107.20

The Paramount Leather Substitute on golden finish is black; on fumed finish, brown color to imitate Spanish leather.



To the production of our furniture is brought the vast economies of specialized quantity manufacturing. This places really good furniture within the reach of the average home.

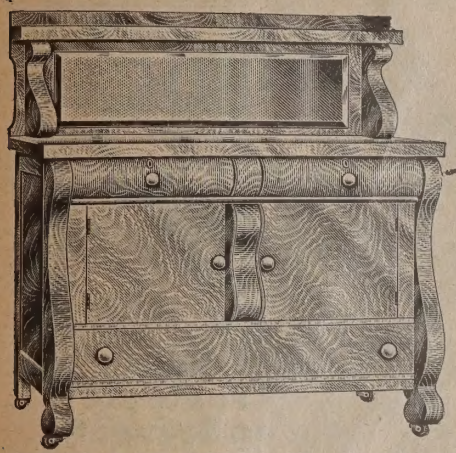

$58.85

In Golden Oak,

54 Inches Long. Plank Top.

Made of seasoned quarter sawed oak. Polished golden or fumed finish, as desired. Base, 24x54 inches. Plank edge top. Bevel plate mirror, 10x42 inches. One top drawer lined for silverware. Shipped from factory in INDIANA. Shipping weight, about 230 pounds.

Cupboard is not divided inside. Wood knobs.

IC 2688⅓

Price, golden oak.....$58.85
Price, fumed oak..... 58.95

Other Buffets are shown on pages 780 to 785.

Other Dining Tables shown on pages 775 to 777, also pages 780 to 783.

$44.65 and Up.

48-Inch Plank Top. 10-Inch Octagon Pedestal.

Made with quarter sawed oak veneered top and base. Polished golden or fumed finish, as desired. Pedestal is non-dividing in all lengths. The 8-foot, 10-foot and 12-foot lengths have drop legs, as shown in small illustration on page 777. The 6-foot length does not have drop legs. Shipped knocked down from factory in MICHIGAN.

IC 2482⅓

Size	6-foot	8-foot	10-foot	12-foot
Shipping weight, about	160 lbs.	185 lbs.	220 lbs.	235 lbs.
Price, polished golden finish	$44.65	$49.65	$54.65	$59.65
Price, fumed finish	44.75	49.75	54.75	59.75

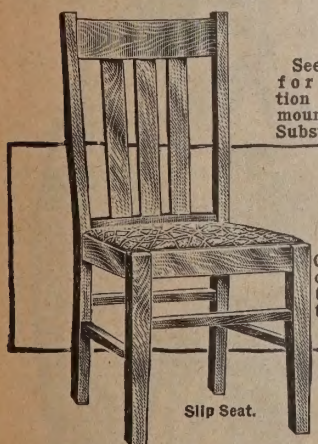

See page 770 for description of Paramount Leather Substitute.

Other Dining Chairs shown on pages 754 to 756, also 780 to 783.

Slip Seat.

Arts and Crafts Design Slip Seat Chair. Made of seasoned solid oak with quarter sawed oak back. Choice of golden gloss or brown fumed finish. Removable slip seat, upholstered in Paramount leather substitute, brown Spanish grained. Height of back from seat, 20½ inches. Entire height, 37½ in. Shipping weight, each, about 14 pounds.

IC 133	Golden Oak	Fumed Oak
Price, each	$ 5.45	$ 5.50
Set of 6 chairs	32.70	33.00

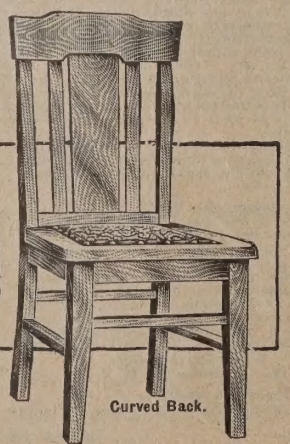

Curved Back.

Plain Modern Design. Made of seasoned oak. Choice of golden gloss finish with genuine black leather seat or brown fumed finish with Paramount leather substitute, brown Spanish grained, seat. Paneled back, 22 inches high from seat, with curved top panel. Entire height, 39 inches. Shipping weight, each, about 16 pounds.

IC 128	Golden Oak	Fumed Oak
Price, each	$ 4.95	$ 5.00
Set of 6 chairs	29.70	30.00

The above page references are to Our Big Catalog No. 140.

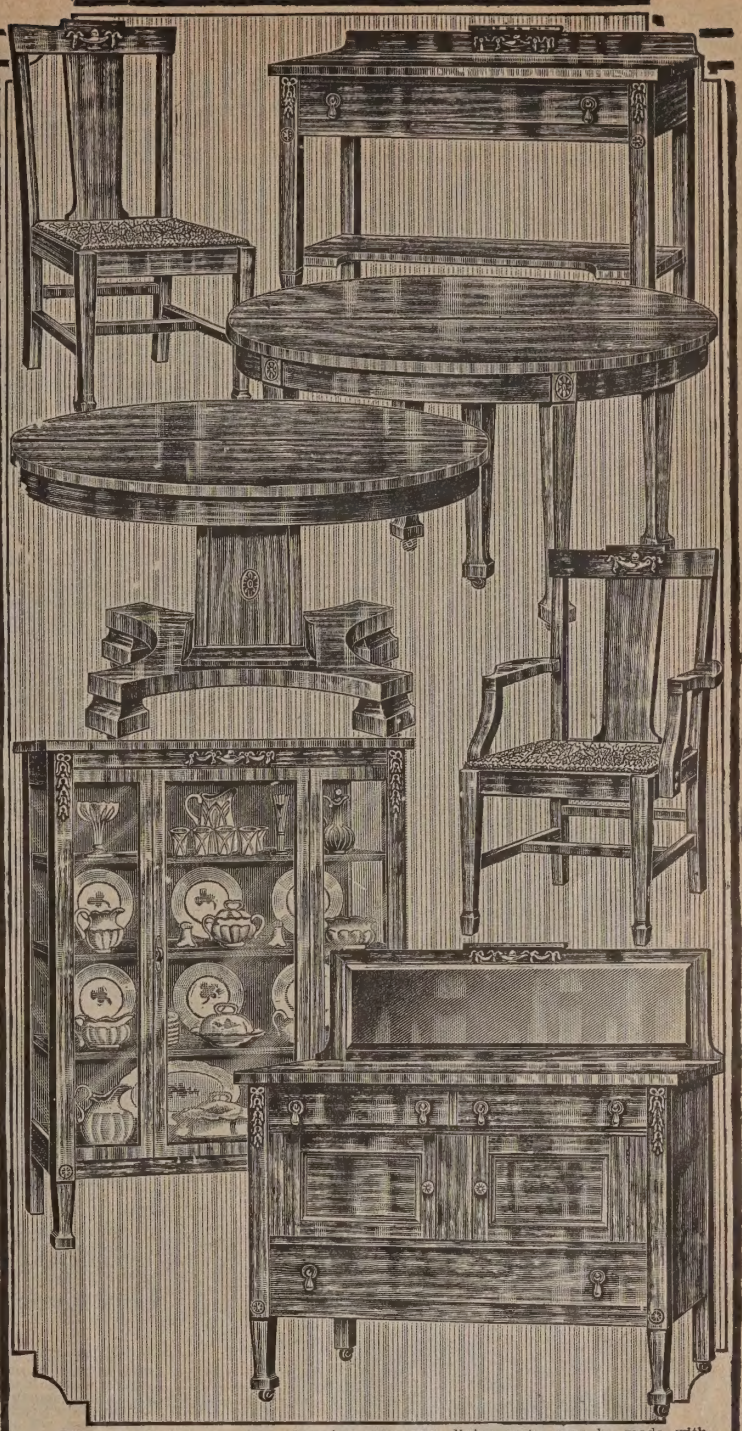

You can well imagine how charming your own dining room may be made with this pretty Adam set as the furnishing. This is one of the most popular period styles that are now so much in vogue throughout the country. Our prices are based on minimum factory costs and the economical plan of selling we employ.

Material and Finish. Made of seasoned quarter sawed oak in choice of dull golden or brown fumed finish, in seasoned gumwood, with base, tops and table tops veneered with genuine mahogany in antique finish, a warm brown color; and also in gumwood, American walnut dull satin finish.

Serving Table. Size of top, 18x40 inches.

Buffet. Base, 22x48 inches. Bevel mirror, 10x42 inches. One top drawer lined for silverware. Wood knobs.

China Cabinet. Height, 60 inches; width, 42 inches; depth, 13 inches. Glass paneled. Three adjustable grooved shelves. Sliding casters.

Chairs. Removable slip seats, upholstered with genuine leather, brown Spanish grained. Height, back, 22 inches. Entire height, 38 inches.

Pedestal Table. 48-in. top. Pedestal, 10 inches thick, non-dividing; all except 6-foot lengths have drop legs (see small illustration, page 777).

Five-Leg Table. Top, 48 inches in diameter. When extended the center leg remains stationary to support center of table.

Be sure to specify your choice of finish. Dull Golden Oak, Fumed Oak, Brown Mahogany or Walnut Finish. Any of these pieces may be purchased separately.

IC 2327⅓

Buffet.	Shipping weight, about 200 pounds				$68.85
China Cabinet.	Shipping weight, about 135 pounds				49.50
Serving Table.	Shipping weight, about 105 pounds				29.75
Dining Chairs.	Shipping weight, about 16 pounds.	Each			12.95
Arm (Host) Chair.	Shipping weight, about 20 pounds.	Each			16.95
Extension Table. Size	6-foot	8-foot	10-foot	12-foot	
Shipping weight, about	160 lbs.	180 lbs.	215 lbs.	235 lbs.	
Price, Five-Leg Table	$52.50	$58.50	$64.50	$70.50	
Price, Pedestal Table	57.50	63.50	69.50	75.50	

All pieces except chairs are shipped from factory in ROCKFORD, ILL., or INDIANA. The chairs are shipped from our CHICAGO store.

Easy Payments on Modern Water Supply and Plumbing Systems

Write for Our Special Plumbing Catalog

Sent Postpaid on Request

We offer you an opportunity to equip your home with a Modern Pneumatic Water Supply System, a complete Modern Plumbing System and other modern home conveniences at very reasonable prices, and we will arrange the terms of payment so that you can enjoy the great comfort and convenience of these modern improvements in your home while paying for the material in small monthly payments, which will be easily within your means.

You need not wait until you have accumulated sufficient funds to pay cash in full for this material. You can begin right now to enjoy these great comforts in your home.

Easily Installed.

Any man who is at all handy with tools and can cut and thread ordinary iron pipe and screw it together can easily install any of our complete plumbing or water supply systems by following our simple plans and instructions.

We have a competent force of experienced plumbing experts who are always at your service, and are ready to assist you at any time should any possible unforeseen difficulty arise in connection with the installation of the material.

Thousands of our customers have purchased their plumbing systems from us at a big saving and have successfully installed their own material. You can do the same and make just as big a saving.

Write for Our Special Plumbing Catalog.

We list a large number of Water Supply Systems, various types and sizes, in our Special Plumbing Catalog, which are not quoted here owing to limited space. It will be to your interest to write for this special catalog if you are contemplating installing a Modern Water System or Modern Plumbing System in your home. Why not write us today and let us mail you a copy of this book? We will send it postpaid on request.

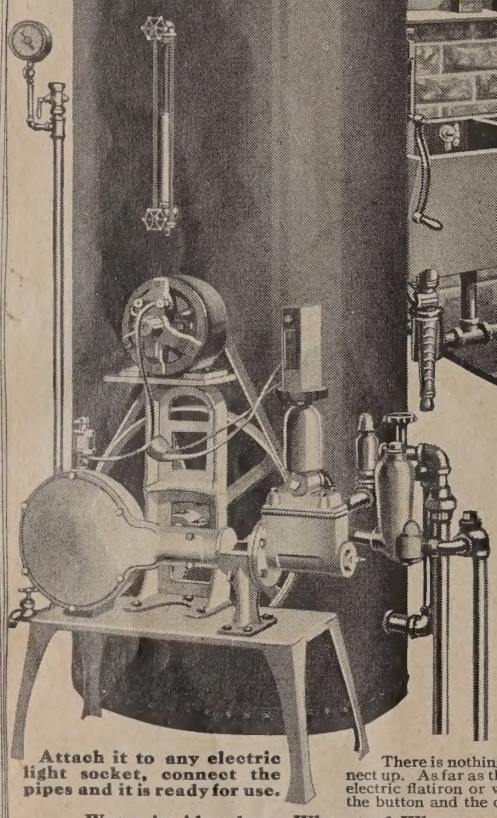

Attach it to any electric light socket, connect the pipes and it is ready for use.

Our Ever Ready Automatic Electric Water Supply System

The Modern Water Supply System is the foundation of all plumbing conveniences in the home. After you once have a good reliable water supply system installed, it is a very simple matter to extend the pipes and have running water wherever you want it on your premises.

Our Ever Ready Automatic Electric Water Supply System, illustrated here, will automatically supply running water to your bathroom, kitchen sink, laundry, etc. These outfits may be used for pumping from wells or cisterns not over 25 feet deep. You can extend the piping to your barn for watering stock, if you wish, and have hydrants conveniently placed for lawn or garden sprinkling. All of these conveniences are yours as soon as you have one of these modern outfits installed in your home.

There is nothing complicated or difficult to understand about this outfit. It is easy to connect up. As far as the electrical part is concerned it is just as easy to connect up as an ordinary electric flatiron or washing machine; just screw the plug into any electric light socket, turn the button and the outfit immediately starts pumping.

Water in Abundance When and Where You Want It.

A suction pipe is, of course, extended to your well, and discharge pipe from the pump is connected to the water supply pipe in your home. Any man who can cut and thread ordinary iron pipe can easily install this outfit in a few hours. When once installed, aside from the occasional supplying of oil, it needs no further attention. It starts and stops automatically, and will always keep a liberal supply of fresh water under pressure in the tank, and the moment you open a faucet anywhere on the piping system you will get a plentiful supply of water.

Water Fresh From the Well.

One of the nicest features of our Ever Ready Automatic Electric Water Supply System lies in the fact that you can always get a glass of fresh water, clear, cool and refreshing, direct from the well.

By extending a separate pipe direct from the pump to your kitchen or bathroom for supplying drinking water, the pump will start instantly as soon as you open the faucet, and the check valve prevents the tank water from getting into this pipe. By this plan you get water fresh from the well. Water from the tank is used only for household purposes, and not for drinking.

Our Special Plumbing Catalog Tells All About This Wonderful Little Outfit. Write for it today.
Stroke of pump, 3 inches; bore, 1½ inches;. Capacity, 125 gallons per hour. Size of motor, ⅛ H. P.

Prices for Automatic Electric Water Supply Systems—Cash or Easy Payments.

42C2715⅓—Outfit with 18-inch by 4-foot black steel tank. Total capacity, 53 gallons; working capacity, 42 gallons. Shipping weight, 290 pounds. Cash price, complete. **$123.20.** Price, on easy payments, $129.35.

42C2716⅓—Outfit as above, with galvanized tank instead of black. Cash price, complete..... **$128.70**
Price, on easy payments, $135.10.

42C2717⅓—Outfit with 20-inch by 5-foot black steel tank. Total capacity, 82 gallons; working capacity, 65 gallons. Shipping weight, 460 pounds. Cash price, complete..... **130.40**
Price, on easy payments, $136.90.

42C2718⅓—Outfit same as 42C2717⅓, with galvanized tank instead of black. Cash price, complete..... **140.35**
Price, on easy payments, $147.35.

42C2674⅓—Pump, switch and motor only, as illustrated. Shipping weight, 100 pounds. Cash price, complete. **83.00**
Price, on easy payments, $87.15.

Pump with motor and automatic switch on all above outfits shipped from factory in OHIO; tanks from factory in ILLINOIS; gauges and valves from our CHICAGO store. When ordering any of the above outfits please state whether the electric current is direct or alternating, also give the voltage; and if alternating, whether one, two or three-phase, and the cycles. If ordering on easy payments please use blank on opposite page.

WATER-FRESH FROM THE WELL WITH OUR EVER READY ELECTRIC WATER SUPPLY SYSTEM

Enjoy the Great Comfort *and* Convenience of Modern Plumbing in Your Home

You can enjoy the great comfort and convenience of these modern improvements in your home while paying for the material on our Easy Payment Plan.

Our Prices Mean a Big Saving to You.

If you wish, we will prepare a special estimate for you on a complete Modern Plumbing System suited to your particular requirements, including all necessary pipes, fittings, connections, etc., required to install the outfit in your home, and if you wish we will outline our proposition, so that you can pay for the outfit on an easy payment plan.

If interested, we will gladly send you our Special Plumbing Information Blank, which you can fill out and return for our estimate.

You can make a large saving by taking advantage of our low prices and looking after the installation of the material yourself. Why not take advantage of our liberal offer and make this great saving?

Write for Our Estimate.

If you will prepare a sketch showing the relative location of your well, indicate the different points to which you wish to extend the piping for running water, and give us an approximate idea of the amount of water you require, depth and diameter of well, etc., we will prepare a special estimate on a modern water supply system that we guarantee to meet your requirements. Our prices are low and it will be to your interest to get our figures. We also sell larger outfits to meet any requirements, gasoline engine or windmill driven. **See our Special Plumbing Catalog.**

Hand Power Outfits for Shallow Wells or Cisterns.

Our Ever Ready Pneumatic Water Supply System illustrated here will force water wherever you wish to extend the pipe and connect a faucet. With one of these outfits you can have all the conveniences of modern plumbing. A sink, bathtub, lavatory or water closet with hot and cold water always on tap. **The first cost is the only cost.** Fifteen minutes' pumping each day supplies sufficient water for the ordinary household.

42C2043½—Outfit includes one vertical black steel pneumatic tank, 24 inches in diameter by 6 feet high. Total capacity, 140 gallons; working capacity, 100 gallons. One double acting force pump with 3-inch brass lined water cylinder and brass air pump attached, and all necessary valves, gauges and connections, etc., as shown in illustration. Shipping weight, 470 pounds.

Cash price, complete, with black tank.....**$73.95**
Price, complete, on easy payments, $77.65.
Cash price, complete, with tank galvanized inside and out..... **95.25**
Price, complete, on easy payments, $100.00.

When ordering please use special Easy Payment Order Blank at bottom of this page.

42C2044½—Outfit as above, with tank 6 feet high by 30 inches in diameter. Total capacity, 220 gallons; working capacity, 150 gallons. Shipping weight, 660 pounds.

Cash price, complete, with black tank..**$90.60**
Price, complete, on easy payments, $95.10.

Cash price, complete, with tank galvanized inside and out.....**$117.25**
Price, complete, on easy payments, $123.10

42C2046½—Outfit as above, with tank 6 feet high by 36 inches in diameter. Total capacity, 315 gallons; working capacity, 215 gallons. Shipping weight, 860 pounds.

Cash price, complete, with black tank.....**$112.75**
Price, complete, on easy payments, $118.40.
Cash price, complete, with tank galvanized inside and out...**$150.10**
Price, complete, on easy payments, $157.60.

Tanks on all of above outfits shipped from factory in CENTRAL ILLINOIS; pumps and trimmings from our CHICAGO store.



Suction Pipe From Well or Cistern.

For wells up to 25 feet deep.

Terms if Purchased on Easy Payments.

1. **Send as large a payment as you can with the order.**
2. **Make your monthly payments as large as you can afford.**
3. **Pay interest at 6 per cent per annum. (Your interest becomes less each time you make a payment.)**

NOTE:—These terms also apply to our Ever Ready Electric Water Supply Systems quoted on opposite page, and Pipeless Furnaces quoted on page 62.

Cut Off Coupon on This Line ☛

Please Fill Out This Order Blank if Ordering a Water Supply System or Pipeless Furnace on Easy Payment Plan

Sears, Roebuck and Co., Chicago. Date_____192__

You may ship { Water Supply System / Pipeless Furnace } _____ Catalog No._____ Price, $_____

Enclosed is payment of $_____ required with order.

If I decide to keep and use it, I will pay $_____ monthly, with interest at 6 per cent per annum, beginning one month from date shipped, until I have paid in full, then the shipment becomes my property. (See catalog for correct amount.)

Should I decide not to keep and use the shipment, I will notify you and you are to give me instructions so that I may send it back at your expense. You are also to return the amount I paid, including the transportation charges.

I have always been faithful in paying my obligations and am making this statement for the purpose of inducing you to grant me these terms, and I give you my pledge that you may feel safe in trusting me to pay as agreed.

Sign Here ☛
Your Name_____ R. F. D. No._____ Box No._____ Street and No._____
(Sign your name here plainly and carefully. If under age, some member of your family who is of age and responsible should sign this order with you.)

Postoffice_____ County_____ State_____

Shipping Point_____ County_____ State_____

Do you own the property in which the Water Supply System will be installed?_____

Cost of property, including improvements, $_____ If property is mortgaged, state amount, $_____

I have been located in this town since_____ If less than 5 years, give former address_____

My Business, Profession or Occupation is_____ Please give name of HEAD OF HOUSEHOLD to prevent mistakes and simplify the keeping of our records. Name of HEAD OF HOUSEHOLD ☛_____

(Please Give Names of TWO References.)

References

Name	Address	Business or Occupation

Easy Payments on Pipeless Furnaces

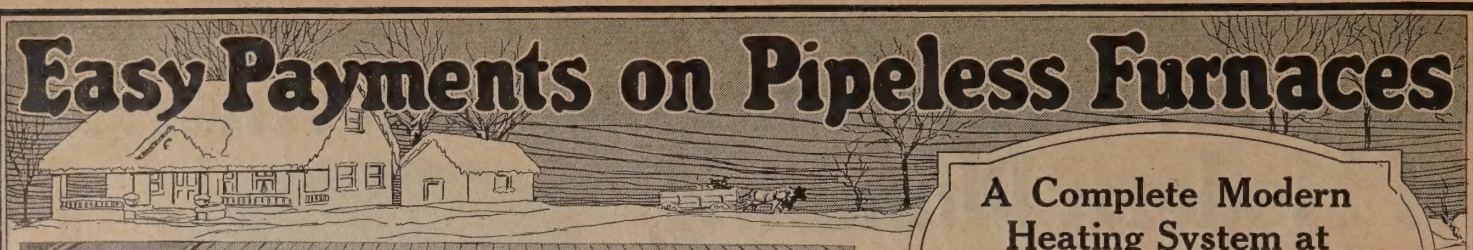

A Complete Modern Heating System at Little More Than the Cost of a Stove

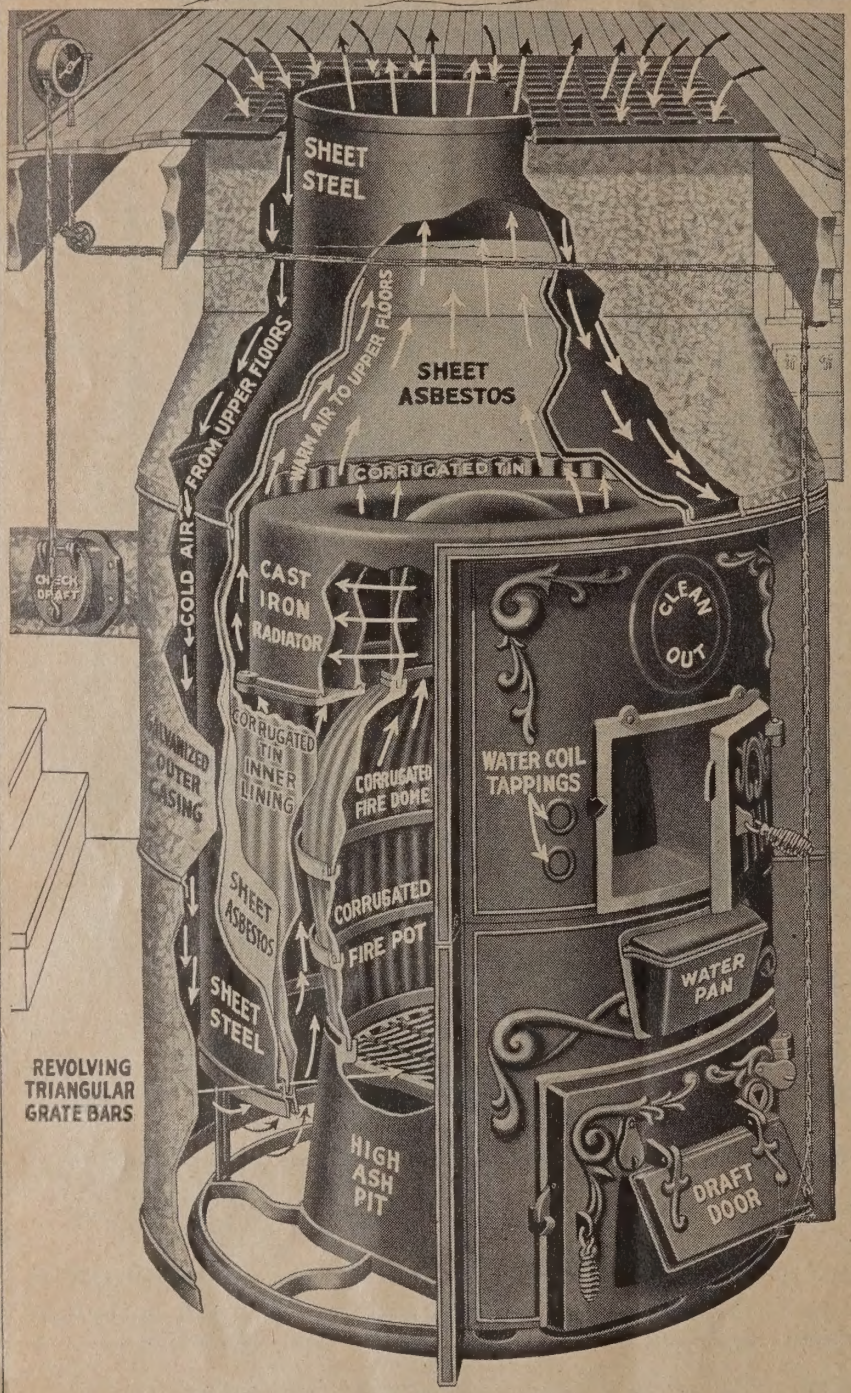

No more coal, smoke or ashes in your living rooms.

No putting up or taking down stoves every six months.

Costs little more than a stove.

Easy to install.

Keeps entire house warm.

Gives you more space in your living room, which would otherwise be taken up with a stove.

Economical in fuel.

Burns hard coal, soft coal, wood or coke.

Simplest and Most Economical of All Heating Systems

Our Pipeless Furnaces are the simplest of all systems of heating and, by reason of their extreme simplicity, they are, without any question, the most economical in fuel. The heat is delivered to your rooms almost instantaneously, without passing through any long system of pipes, so there is practically no heat wasted in the basement. Your basement will always be cool enough for vegetables, and for every shovelful of coal you put into this furnace you will get big returns in actual heat units in your rooms. This is the reason our Pipeless Furnaces have become so popular.

Keeps Entire House Comfortably Warm.

Our Pipeless Furnaces not only keep the room in which the large register is placed comfortably warm, but experience has proved that in any ordinary residence where one of our Pipeless Furnaces is installed (if the doors between adjoining rooms are left open, or registers installed in the ceiling, so as to allow a reasonable amount of circulation between the rooms), every room will be comfortably warm.

Easy to Install.

Our Pipeless Furnaces cost little more than a stove and are almost as easy to install. A man and a boy can easily set up this furnace in half a day. Complete instructions are furnished with each outfit so that you will understand just how all the parts go together. It does not require an expert mechanic. Anyone who can set up an ordinary heating stove can install this furnace by following our simple instructions.

Size to Order.

Figure up the total cubic contents of your building and select a furnace of corresponding capacity from the table below.

If you live in a real cold climate, or your house is unusually hard to heat, or if you will burn wood or soft coal, we would recommend ordering one size larger furnace. It is always better to have a furnace a little larger than is actually required.

If you prefer we will estimate the size furnace you require for your building. Fill out the special heating information blank enclosed with this catalog carefully and return it to us. Our engineers will figure the correct size furnace and we will quote a price, including all freight charges, to your station if you wish.

Easy Payment Plan.

If ordered on easy payment plan please fill out special order blank on page 61. You can pay for the outfit in small monthly payments which you can easily meet. Remember, every furnace is backed by our guarantee of satisfaction. You can take all the time you want to give the furnace a fair test, and, if you are not absolutely satisfied, return the furnace and we will return your money, with all transportation charges you have paid.

The Hercules Pipeless Furnace

Our Hercules Pipeless Furnace, illustrated above, embodies the most advanced improvements in pipeless furnace design.

The general construction of the furnace part is the same as our Hercules Furnace described and illustrated in detail on page 49 of our Special Heating Catalog.

It is made of heavy cast iron throughout, equipped with heavy revolving triangular grates, corrugated fire pot castings and cast iron radiator.

The inner casing is lined with corrugated sheet tin and sheet asbestos, as clearly shown in the above illustration. High ash pit prevents burning out grate bars. Liberal size fuel door. High quality in workmanship, finish and material.

Furnace is shipped in parts so that it will go through a small basement doorway. Can be adjusted to any height of basement from 6 to 8 feet.

Prices of Hercules Pipeless Furnaces.

	42C2255⅓	42C2256⅓	42C2257⅓	42C2259⅓
Diameter of fire pot, in...	20	22	24	28
Diam. of inside casing, in.	38	42	46	52
Diam. of outer casing, in..	46	50	54	62
Size of feed door, inches..	10x11	11x12	11x13	11½x14½
Depth of fire pot, inches..	11½	12	12½	13
Diam. of smoke pipe, in...	8	8	8	9
Size of register, inches....	30x30	30x36	36x36	40x40
Heating capacity, cu. ft...	14,000	20,000	28,000	40,000
Approx. shpg. wt., abt., lbs.	950	1,160	1,275	1,800
Cash price, complete....	$130.60	$149.60	$168.70	$249.70
Price, on easy payments..	137.10	157.10	177.10	262.20

For Terms, if Purchased on Easy Payments, See Special Order Blank on Page 61.

Prices are subject to market changes.

Hot Water Coil for Hercules Furnace, $2.25 extra. If wanted with Gas Burner in addition to coal grate, write for prices.

Cold Air Is Taken From Upstairs.

This furnace differs from our Volcano Pipeless and our Hummer Pipeless in the construction of the casing. It will be observed that in this furnace the cold air is taken from the living rooms. It enters the large register around the sides and drops down to the base of the furnace, where it turns up under the inner casing and passes over the hot surfaces of the furnace, becoming heated again and it is then discharged into the rooms upstairs through the center of the large register as shown.

This circulation of the warm air to the living rooms and the cold air to the furnace goes on continuously as long as there is a fire in the furnace, and causes the warm air to circulate to all parts of the building.

Full instructions for installing and operating sent with every furnace.

Modern Bathroom Outfits

BATHTUB is 5 feet long, 30 inches wide over rim at top and 16½ inches deep, sufficient to prevent water from splashing over sides. Height from floor to top of tub, 22 inches. Made of cast iron, coated inside with white porcelain enamel, and has 3-inch roll rim. Standard Fuller pattern No. 4½ bath cock, 1½-inch connected waste and overflow and two ½-inch offset supply pipes to floor, all of brass, nickel plated and polished.

LAVATORY is 18 inches from front to back, 21 inches wide and has 8-inch high back and roll or turnover rim 4 inches deep. Soap cup cast in top directly above overflow. 1¼-inch trap with outlet to wall, two compression faucets with china tops, one marked "hot" the other "cold," and two ⅜-inch supply pipes from cocks to wall. All trimmings of the latest design, made of brass, nicely nickel plated.

Dellwood Bathroom Outfit.

A very popular combination. Modern, of neat appearance and durable. Suitable for the finest residence. A good, serviceable outfit at a moderate price. Why not enjoy this great comfort in your home now?

CLOSET has siphon washdown pattern bowl of vitreous earthenware, polished grain sawed oak tank and seat. Tank lined with copper, holds 6½ gallons. China handle flush lever, ⅜-inch supply pipe to floor, hinges for seat and screws and washers for fastening bowl to floor. All trimmings are nicely nickel plated. **Bathtub and lavatory shipped from LAYTON PARK, WIS.** Shipping weight, about 390 pounds. **Closet shipped from our CHICAGO store.** Shipping weight, about 95 pounds.

42C9214⅓—Dellwood Bathroom Outfit (bathtub, lavatory and closet), with supply and waste pipes of lavatory to wall, as illustrated. Price.....**$88.75**

42C2214⅓—Dellwood Bathroom Outfit (bathtub, lavatory and closet), with supply and waste pipes of lavatory to floor. Price.....**$89.35**

If wanted with waste and supply pipes threaded for connecting to iron pipe, allow $1.50 extra.
Prices do not include paper holders, towel bars, etc. For Bathroom Trimmings see page 829 of our big General Catalog No. 140.

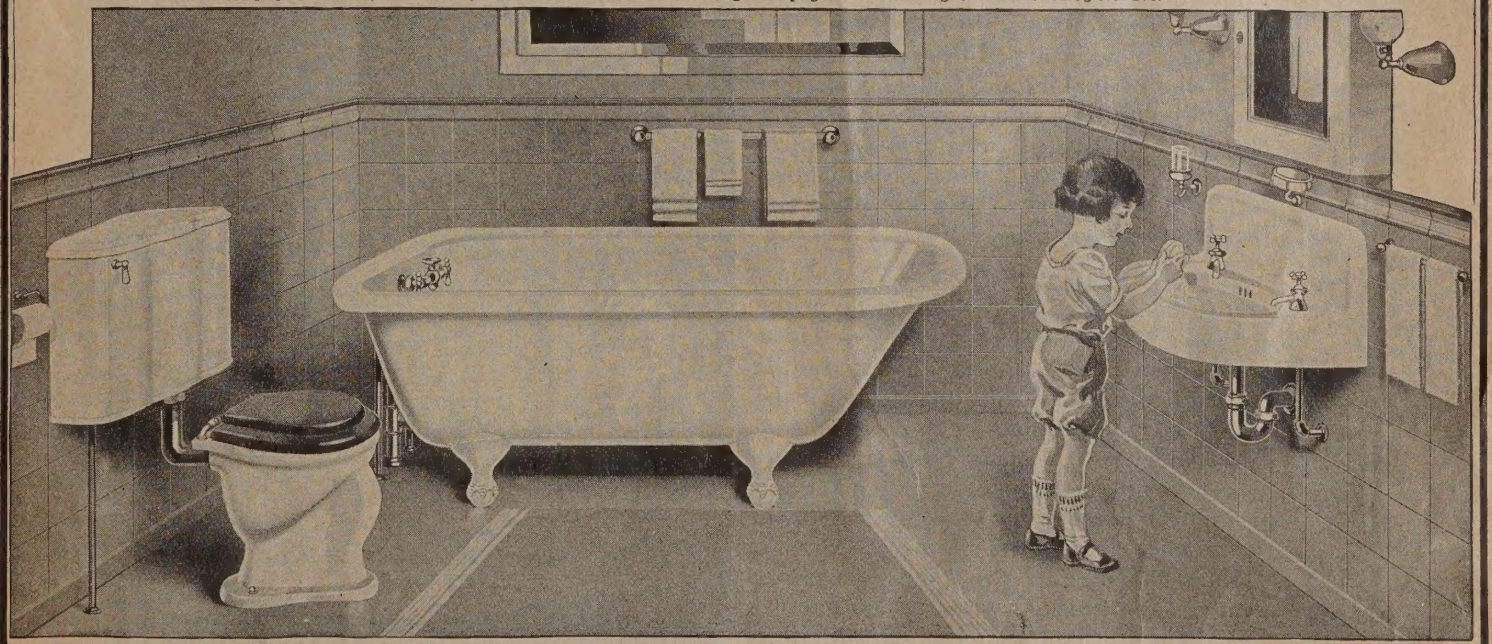

BATHTUB—Same as furnished with Dellwood Bathroom Outfit described above, complete with trimmings to floor.

LAVATORY—Same as furnished with Dellwood Bathroom Outfit described above, complete with trimmings to wall.

CLOSET—The closet combination is the special feature of this bathroom outfit. Has siphon washdown bowl of vitreous earthenware, polished quarter sawed oak seat with nickel plated brass hinges, and large capacity white china tank with china handle flush lever and nickel plated supply pipe to floor.

Fairview Bathroom Outfit.

The handsome snow white vitreous china closet tank is the special feature of this outfit. Sanitary, attractive and durable.

CLOSET TANK—White vitreous china, artistically designed with curved or wave style front and cover to match, making a beautiful sanitary closet outfit that is easily kept clean and white, and one that will add greatly to the appearance of your bathroom. **Bathtub and lavatory shipped from LAYTON PARK, WIS. Closet from our CHICAGO store.** Shipping weight, 395 pounds.

42C9222⅓—Fairview Bathroom Outfit (bathtub, lavatory and closet), with supply and waste pipes to wall, as illustrated. Price.....**$96.95**

42C9223⅓—Fairview Bathroom Outfit (bathtub, lavatory and closet), with supply and waste pipes to floor. Price.....**$97.55**

If wanted with supply and waste pipes threaded for iron pipe, add $1.50 extra.
Prices for above outfits do not include paper holders, towel bars, etc. For Bathroom Trimmings see page 829 of our big General Catalog No. 140.

We Furnish Materials Cut to Fit
For Houses of Regular Construction

We Give You a Long Time to Pay

Write for Book of "Honor Bilt" Modern Homes if You Are Not Interested in Simplex Ready Made Buildings

IT SHOULD interest you to know that we have sold thousands of Modern Homes. We will be glad to refer you to somebody in your vicinity who has built a house according to our plans and with our materials. But if you will read the many letters from our customers, printed thoughout our Book of Modern Homes, we feel sure you will not question our ability to save you money on high quality material and to give you good service in the way of quick shipment.

During the past few years we have sold millions of dollars worth of building material. According to what a number of our customers tell us, they saved as much as $1,000.00 on a single house. You should be interested in a saving of $500.00 or more. Send for our latest Book of Modern Homes, select your plans and let us demonstrate that this saving is possible.

"Honor Bilt" Means Homes of Quality and Strong Construction at Popular Prices

Many new houses shown in full colors, suggesting beautiful treatment—**see sample page on inside back cover.** Modern interiors also shown in colors in this book of designs of houses suitable for all sections of the country—big city homes, country residences, up to date bungalows and economical cottages. Noted architects have contributed their best ideas for our collection of houses. Building experts have worked upon the specifications with a view to maintaining the highest quality at the least expense.

Learn in this new book all about our famous "Honor Bilt" construction. Read how we have carefully provided for extra strength, warmth, durability and attractiveness in all of our houses. Read about the wonderful "already cut" system by which expert labor in putting up a house is MORE THAN CUT IN HALF. Remember that this new book enables you to make a big saving and to become a happy home owner on the easiest terms you ever heard of.

A Big Book of 124 Pages

Our latest Book of Modern Homes contains a fine selection of houses, the materials for many of which are already cut and fitted. Many designs are entirely new. People who are best qualified to judge claim that our book now occupies first place among all books of its kind. It is a book that should be in the hands of every contractor, carpenter or anyone contemplating building a city residence, bungalow, cottage or farm house. A postal card will bring you this big book postpaid.

If you have any building to do it will pay you to post yourself on every angle of the building proposition. Send for our latest Book of Modern Homes and study the illustrations. If you do this there will be no doubt in your mind as to the saving we can make you. We can refer you to our customers in every state in the Union and possibly to somebody in your own town. Remember, our latest Book of Modern Homes will be mailed to you postpaid on request. In order to get the book quoting our latest prices ask for our Modern Home Book No. 596C. **See sample page on inside back cover.**

USE THIS ORDER BLANK FOR

SIMPLEX READY MADE HOUSES

TERMS:	1—Cash With Order	2—Pay After Inspecting Building	3—Easy Payments

Date_____ 19__

Name_____

Postoffice_____

R. F. D. No._____ Box No._____ State_____

Street and No._____

GIVE SHIPPING POINT IF DIFFERENT FROM POSTOFFICE.

Name_____
(Give name here only when shipment is to be made to another party. If to yourself leave space blank.)

Shipping Point_____

County_____ State_____

Make out your order on the following lines, no matter which one of our three methods of payment you decide to use

SEARS, ROEBUCK AND CO., Chicago, Ill.

PLEASE SHIP THE FOLLOWING:

	Catalog Number of Building Wanted	Quantity Desired	DESCRIPTION	Price of Each	

NOTE If you order one of our Ready Made Houses according to the easy payment terms (explained on the other side of this page), be sure to order wall board for the building. **NOTE**

1—CASH WITH ORDER

You can send cash in full with your order (in the form of postoffice or express money order or personal check) and feel absolutely sure that you will be perfectly satisfied in every respect. **Our guarantee protects you.** YOUR MONEY INCLUDING ANY TRANSPORTATION CHARGES YOU PAID WILL BE IMMEDIATELY RETURNED TO YOU FOR ANY GOODS NOT PERFECTLY SATISFACTORY.

IF YOU SEND CASH WITH THIS ORDER STATE THE AMOUNT HERE	AMOUNT

2—PAY AFTER INSPECTING BUILDING

If you would like to inspect building before sending us the money you can deposit the payment required with your bank or building and loan association and send us this letter of deposit with your order:

LETTER OF DEPOSIT

_____ 19__

Postoffice_____ State_____

Sears, Roebuck and Co., Chicago, Ill.

_____ has deposited with us the sum of $_____ subject to your order, same to be paid to you upon delivery of the building ordered of you, with the understanding that the shipment must conform with your specifications and meet with depositor's approval. The building is to be inspected immediately upon its receipt and, if satisfactory, accepted by the depositor, who will then notify us to send you the money.

Yours truly,

_____
(Name of Bank or Building and Loan Association.)

_____
(Signature of Officer and Title.)

SEARS, ROEBUCK AND CO. - - - CHICAGO

3—EASY PAYMENTS

(SEE OTHER SIDE)

USE THIS ORDER BLANK FOR

SIMPLEX READY MADE HOUSES

4. EASY PAYMENT PLAN

IF YOU own a building lot or land free from debt and have some cash on hand to pay for labor and material which we do not furnish, we will ship Simplex Ready Made Buildings, plumbing, heating outfits and lighting fixtures on easy payment terms, freight prepaid to your station. A small payment each month, or if more convenient every three or six months, makes you the owner of a good home in a few years.

Here Is What Would Be Required of You:

1. Show title to your lot or land.
2. Furnish cash to pay for labor and masonry material.
3. Simplex buildings purchased on Easy Payment Terms are to be lined with Peerless Wall Board, erected on a solid concrete, cement block, brick or stone foundation; put up in a permanent manner and used as all year round homes.
4. Send us with order 2½ per cent of the amount that will be due us. This is to cover the expense of handling the transaction, such as examining title, drawing up papers and other expenses we do not have in connection with our regular cash with order business.
5. Send as large a payment as you can with the order, and make your monthly payments as large as you can afford. You can pay as much more than your regular payment as you desire, or pay in full whenever convenient.
6. Pay interest at rate of 6 per cent per year. Your interest becomes less each time you make a payment.

FARM OWNERS

Even if your farm is not free from all debt, we may be able to offer you our liberal terms. Fill in the question blank below and write us explaining what your farm cost and how much you owe on it at present.

EASY PAYMENT PLAN INFORMATION BLANK

1. Do you own the lot or land on which you intend to build?.....

2. Cost of property, including improvements, $..... Is property mortgaged?..... State amount, $.....

3. Which of our Ready Made Houses would you like to build?..... Price, $.....

4. Shall we include heating, plumbing, lighting or Peerless Wall Board? Check items wanted.

HEATING.

☐ **Pipeless Furnace**

☐ **Warm Air Furnace.**

To burn Hard Coal ☐ **or Soft Coal** ☐

LIGHTING.

☐ **Gas Fixtures.**

☐ **Electric Fixtures.**

☐ **Combination Gas and Electric Fixtures.**

☐ **Peerless Wall Board**

☐ **Plumbing.**

5. How much cash will you nave to invest in the deal? $..... How much can you pay each month? $.....

6. How much will it cost you to have your building completed after our material reaches you? (Include foundation and chimney material, all labor and drayage.) $.....

Your Name.....

Postoffice..... State.....

R. F. D. No..... Box No..... Street and No.....

SEARS, ROEBUCK AND CO. - - CHICAGO

USE THIS ORDER BLANK FOR

Simplex Ready Made Wood and Steel Garages Also for Chicken Houses

TERMS: | 1—Cash With Order | 2—Pay After Inspecting Building | 3—Easy Payments

Date_____ 19___

Name_____

Postoffice_____

R. F. D. No._____ Box No._____ State_____

Street and No._____

GIVE SHIPPING POINT IF DIFFERENT FROM POSTOFFICE.

Name_____
(Give name here only when shipment is to be made to another party. If to yourself leave space blank.)

Shipping Point_____

County_____ State_____

Make out your order on the following lines, no matter which one of our three methods of payment you decide to use

SEARS, ROEBUCK AND CO., Chicago, Ill.

PLEASE SHIP THE FOLLOWING:

	Catalog Number of Building Wanted	Quantity Desired	DESCRIPTION	Price of Each	

1—CASH WITH ORDER

You can send cash in full with your order (in the form of postoffice or express money order or personal check) and feel absolutely sure that you will be perfectly satisfied in every respect. **Our guarantee protects you.** YOUR MONEY INCLUDING ANY TRANSPORTATION CHARGES YOU PAID WILL BE IMMEDIATELY RETURNED TO YOU FOR ANY GOODS NOT PERFECTLY SATISFACTORY.

IF YOU SEND CASH WITH THIS ORDER STATE THE AMOUNT HERE ☛ | AMOUNT

2—PAY AFTER INSPECTING BUILDING

If you would like to inspect building before sending us the money you can deposit the payment required with your bank or building and loan association and send us this letter of deposit with your order:

LETTER OF DEPOSIT

_____ 19___

Postoffice_____ State_____

Sears, Roebuck and Co., Chicago, Ill.

_____ has deposited with us the sum of $_____ subject to your order, same to be paid to you upon delivery of the building ordered of you, with the understanding that the shipment must conform with your specifications and meet with depositor's approval. The building is to be inspected immediately upon its receipt and, if satisfactory, accepted by the depositor, who will then notify us to send you the money.

Yours truly,

_____
(Name of Bank or Building and Loan Association.)

_____
(Signature of Officer and Title.)

SEARS, ROEBUCK AND CO. - - - CHICAGO

3—EASY PAYMENTS

(SEE OTHER SIDE)

USE THIS ORDER BLANK FOR

Simplex Ready Made Wood and Steel Garages Also for Chicken Houses

We will ship Simplex Ready Made Wood and Steel Garages, also Poultry Houses, on easy payment terms. It is not necessary that these buildings be lined with wall board, although we do recommend that they be put up on permanent foundations.

Send cash in full with all orders which amount to less than $100.00.

HERE IS WHAT WE ASK YOU TO DO.

1. Send as large a payment as you can with the order.
2. Make your monthly payments as large as you can afford.
3. Pay interest at 6 per cent per annum on balance. (Your interest becomes less each time you make a payment.)

On large purchases or accounts requiring longer than two years to pay, we may ask you to protect us against possible loss by giving us a note secured by mortgage.

INFORMATION WHICH WE REQUIRE.

Do you own the property on which the building will be erected?_____

Give description of property as it reads in your deed _____

AVERY LIBRARY
COLUMBIA UNIVERSITY

Describe buildings and other improvements on property_____

Cost of property, including improvements, $_____ If property is mortgaged?_____ State amount, $_____

Name of party holding legal title_____
Be sure to write first name, too—that is, James, Mary, or whatever it may be.

Write wife's name in full if title is in husband's name, or husband's name if title is in wife's name. _____

For what purpose is building ordered to be used?_____ Kind of foundation?_____

How much cash can you send with order? $_____ How much can you pay each month? $_____

How much money will you have available to erect the building when it reaches you? $_____ Business, occupation or profession_____

Please give name of HEAD OF HOUSEHOLD to prevent mistakes and simplify the keeping of our records.
Name of HEAD OF HOUSEHOLD_____ Mention how long you have lived in town where now located _____

(Please Give Names of TWO References.)

References

Name	Address	Business or Occupation

Agreement

(Fill in and sign this agreement if you wish to order on monthly payments.)

SEARS, ROEBUCK AND CO., Chicago, Ill. Date_____ 19____

You may ship me the building described in this order. (Make out order on the other side of this page.) Enclosed is payment of $_____ I will pay $_____ monthly, with interest at 6 per cent, beginning one month from date shipped, until I have paid in full, then the shipment becomes my property.

I have always been faithful in paying my obligations and am making this statement for the purpose of inducing you to grant me these terms, and I give you my pledge that you may feel safe in trusting me to pay as agreed.

Sign Here ☛ _____

(Sign your name here plainly and carefully. If under age, some member of your family who is of age and responsible should sign this order with you.)

Garages **RENTERS:** If you are renting and want to put a garage on the property, show our proposition to your landlord and have him sign the order along with you, or, if you want the landlord to put up the garage, show him where he can increase the renting power of his property. You will then have the convenience of having the garage right where you live. **Garages**

SEARS, ROEBUCK AND CO. - - - CHICAGO

A POPULAR COLONIAL

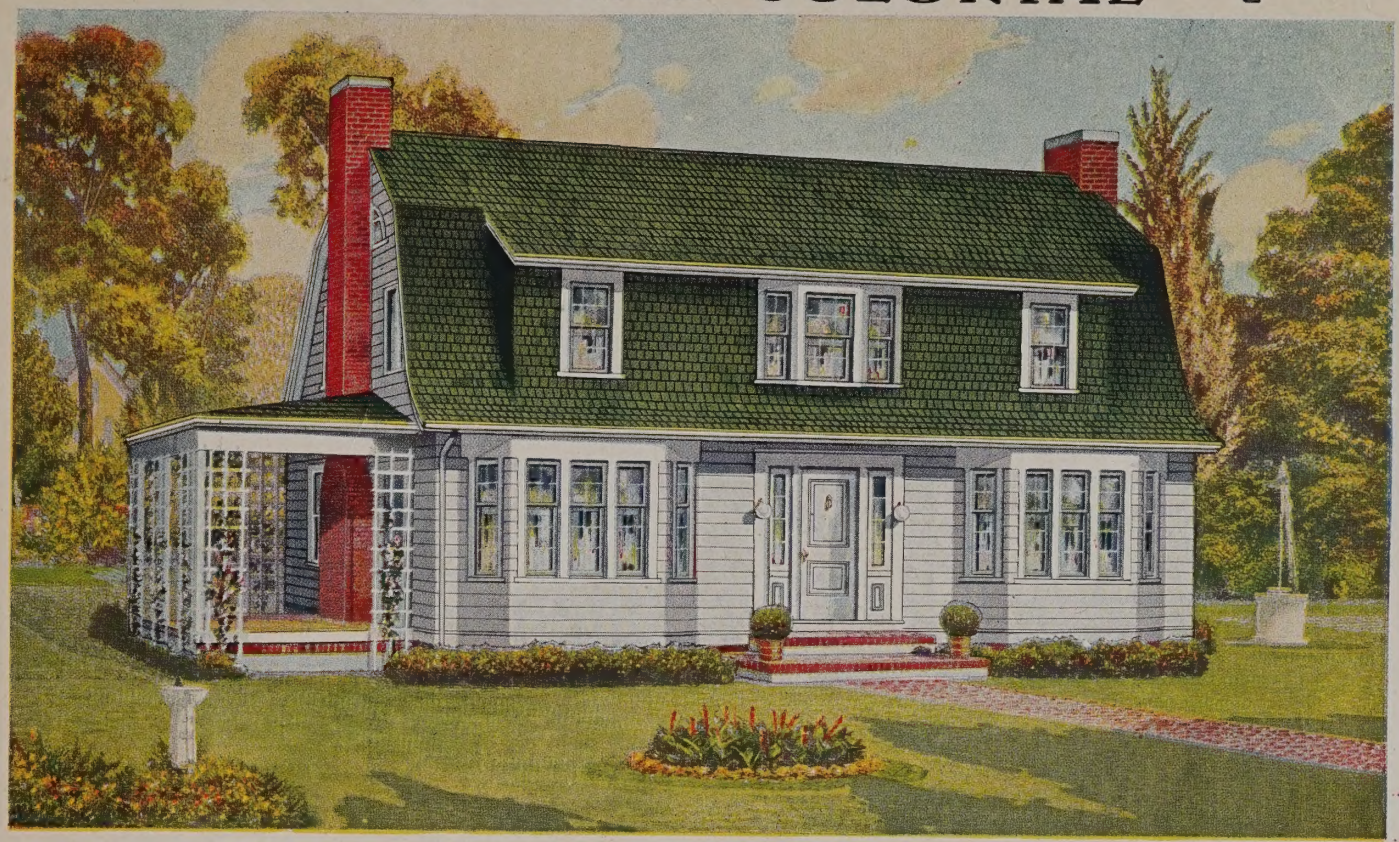

This is a sample page from our Book of "Honor Bilt" Modern Homes.

The VERONA

Honor Bilt

No. 2094 "Already Cut" and Fitted.

$4,551.00

Floor plans are shown in our Book of "Honor Bilt" Modern Homes.

At the above price we will furnish all the material to build this seven-room house with frame construction, consisting of lumber, lath, shingles, porch ceiling, siding, finishing lumber, mill work, mantel, pantry, medicine case, columned opening, seats with table for breakfast alcove, building paper, eaves trough, down spout, hardware and painting material. We guarantee enough material to build this house. Price does not include cement, brick or plaster.

THE VERONA is a design that has received the widest publicity and is a favorite adaptation of the Colonial type. The illustrations on this page take the place of any elaborate description.

First Floor A French door leads into the reception hall. A cased opening leads into the extra large living room, from which a door leads to the side porch. The dining room has a cased opening from the reception hall. In the kitchen will be found a breakfast alcove and a convenient place for refrigerator. Rooms are 9 feet from floor to ceiling.

Second Floor Bathroom and four bedrooms with closets on this floor, all of good size and well lighted. There is an open balcony in the rear. Rooms are 8 feet 3 inches from floor to ceiling.

We furnish our best "Quality Guaranteed" mill work. Interior doors are five-cross panel, with trim and flooring to match, all yellow pine, in beautiful grain and color.

Paint furnished for three coats outside, your choice of color. Varnish and wood filler for interior finish. Chicago Design hardware.

Built on a brick foundation, with excavated basement 7 feet from floor to joists; No. 1 yellow pine frame construction, sided with wide clear cypress siding and roofed with extra thick red cedar shingles.

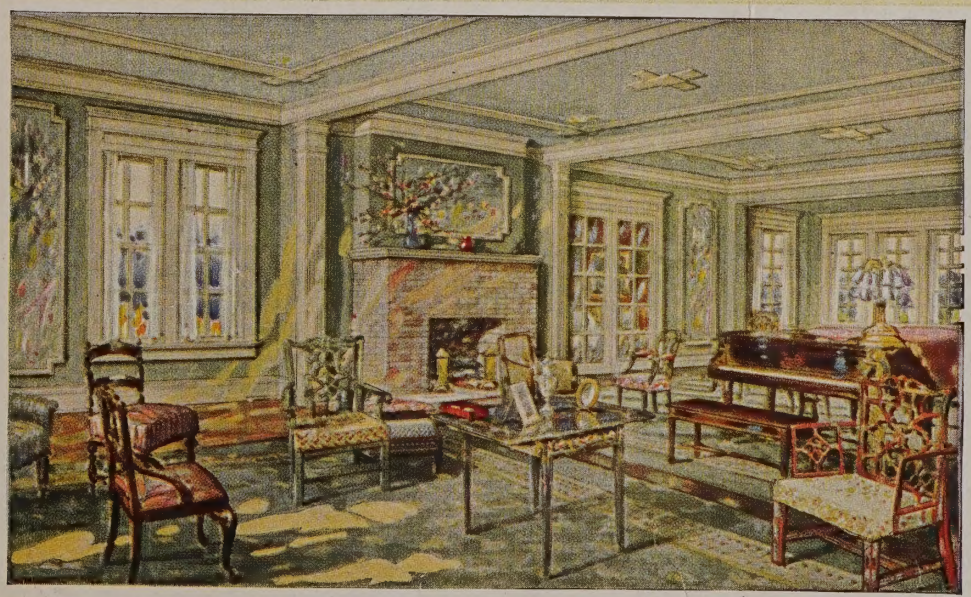

THE LIVING ROOM

OPTIONS

Sheet Plaster and Plaster Finish furnished in place of wood lath, $185.00 extra.

Oak Trim and Floors for reception hall, living and dining rooms, $356.00 extra.

Fire-Chief Shingle Roll Roofing, Red or Sea Green in color, instead of wood shingles, $128.00 less.

Storm Doors and Windows, $144.00 extra.

Screen Doors and Windows, black wire, $80.00 extra; galvanized wire, $86.00 extra.

Can be built on a lot 50 feet wide.

Order Your House From Sears, Roebuck and Co. Our Guarantee Protects You. Price Includes Plans and Specifications.

READY MADE BUILDINGS

SEARS, ROEBUCK AND CO.
CHICAGO